

If you plan to submit a bid directly to the Department of Transportation

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later than 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

REQUESTS FOR AUTHORIZATION TO BID

Contractors downloading and/or ordering CD-ROM's and are wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) and the ORIGINAL "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHO CAN BID ?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form** will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID: Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

ADDENDA: It is the contractor's responsibility to determine which, if any, addenda pertains to any project they may be bidding. Failure to incorporate all relevant addenda may cause the bid to be declared unacceptable.

Each addendum will be placed with the contract number. Addenda will also be placed on the Addendum/Revision Checksheet and each subscription service subscriber will be notified by e-mail of each addendum issued.

The Internet is the Department's primary way of doing business. The subscription server e-mails are an added courtesy the Department provides. It is suggested that bidder check IDOT's website <http://www.dot.il.gov/desenv/delett.html> before submitting final bid information.

IDOT is not responsible for any e-mail related failures.

Addenda Questions may be directed to the Contracts Office at (217)-782-7806 or D&Econtracts@dot.il.gov

Technical Questions about downloading these files may be directed to Roseanne Nance (217)-785-5875 or nancer@dot.il.gov

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of plans and proposals	217/782-7806
Electronic plans and proposals	217/785-5875

ADDENDUMS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated the revisions prior to submitting their bid. Failure by the bidder to include an addendum could result in a bid being rejected as irregular.

41

RETURN WITH BID

Proposal Submitted By
Name
Address
City

Letting November 5, 2004

BIDDERS NEED NOT RETURN THE ENTIRE PROPOSAL
(See instructions inside front cover)

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction.

(SEE INSTRUCTIONS ON THE INSIDE OF COVER)

Notice To Bidders, Specifications, Proposal, Contract and Contract Bond



Illinois Department
of Transportation

Springfield, Illinois 62764

Contract No. 83656
LAKE County
Section 93-00081-04-CH
Route FAU 2657 (Buffalo Grove Road)
Project CMM-7003(772)
District 1 Construction Funds

PLEASE MARK THE APPROPRIATE BOX BELOW:

☐ A Bid Bond is included.

☐ A Cashier's Check or a Certified Check is included

Prepared by

F

Checked by

(Printed by authority of the State of Illinois)

INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

HOW MANY PROPOSALS SHOULD PROSPECTIVE BIDDERS REQUEST?: Prospective bidders should, prior to submitting their initial request for plans and proposals, determine their needs and request the total number of plans and proposals needed for each item requested. There will be a nonrefundable charge of \$15 for each set of plans and specifications issued.

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction. To request authorization, a potential bidder must complete and submit Part B of the Request for Proposal Forms and Plans & Request for Authorization to Bid form (BDE 124) and submit an original Affidavit of Availability (BC 57).

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a **Proposal Denial and/or Authorization Form**, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Proposal Denial and/or Authorization Form** will indicate the reason for denial. If a contractor has requested to bid but has not received a **Proposal Denial and/or Authorization Form**, they should contact the Central Bureau of Construction in advance of the letting date.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of plans and proposals	217/782-7806

RETURN WITH BID



**Illinois Department
of Transportation**

PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

1. Proposal of _____

for the improvement identified and advertised for bids in the Invitation for Bids as:

**Contract No. 83656
LAKE County
Section 93-00081-04-CH
Project CMM-7003(772)
Route FAU 2657 (Buffalo Grove Road)
District 1 Construction Funds**

Project consists of 1.78 miles of reconstruction of a 3-lane bituminous concrete roadway, removal and replacement of storm sewer system, sidewalks, curb and gutter, traffic signal modernization, street lighting and landscaping at Port Clinton Road and Prairie Road.

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents shall govern performance and payments.

RETURN WITH BID

3. **ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER.** The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
4. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

<u>Amount of Bid</u>			<u>Proposal Guaranty</u>	<u>Amount of Bid</u>			<u>Proposal Guaranty</u>
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000	\$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000	\$150,000
\$10,000	to	\$50,000	\$1,000	\$5,000,000	to	\$7,500,000	\$250,000
\$50,000	to	\$100,000	\$3,000	\$7,500,000	to	\$10,000,000	\$400,000
\$100,000	to	\$150,000	\$5,000	\$10,000,000	to	\$15,000,000	\$500,000
\$150,000	to	\$250,000	\$7,500	\$15,000,000	to	\$20,000,000	\$600,000
\$250,000	to	\$500,000	\$12,500	\$20,000,000	to	\$25,000,000	\$700,000
\$500,000	to	\$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000	\$800,000
\$1,000,000	to	\$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000	\$900,000
\$1,500,000	to	\$2,000,000	\$75,000	over		\$35,000,000	\$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted, the proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is _____ \$(). If this proposal is accepted and the undersigned shall fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty shall become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond shall become void or the proposal guaranty check shall be returned to the undersigned.

Attach Cashier's Check or Certified Check Here

In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual proposal. If the guaranty check is placed in another proposal, state below where it may be found.

The proposal guaranty check will be found in the proposal for:

Item _____

Section No. _____

County _____

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

BD 354 (Rev. 11/2001)

RETURN WITH BID

6. **COMBINATION BIDS.** The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination No.	Sections Included in Combination	Combination Bid	
		Dollars	Cents

7. **SCHEDULE OF PRICES.** The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices shall govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.
8. **CERTIFICATE OF AUTHORITY.** The undersigned bidder, if a business organized under the laws of another State, assures the Department that it will furnish a copy of its certificate of authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish the certificate within the time provided for execution of an awarded contract may be cause for cancellation of the award and forfeiture of the proposal guaranty to the State.

STATE JOB # - C-91-267-99
PPS NBR - 1-11001-0000

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656
ECMS002 DIGECM03 ECMR003 PAGE 1
RUN DATE - 09/30/04
RUN TIME - 204614

COUNTY NAME		CODE	DIST	SECTION NUMBER		PROJECT NUMBER		ROUTE	
LAKE		097	01	93-00081-04-CH		CMM-7003/772/000		FAU 2657	
ITEM NUMBER	PAY ITEM DESCRIPTION			UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
MX032922	ELCBL C GND 6 1C			METER	150.000 X	=			
MX033162	ELCBL C COAXIAL			METER	220.000 X	=			
MX033163	ELCBL C VIDEO #20 3C			METER	70.000 X	=			
MX355180	BIT BC SUPER 180			SQ M	4,586.000 X	=			
MX406024	BC SC SUPER "D" N70			M TON	480.000 X	=			
MX406216	BCBC SUP IL-19.0 N70			M TON	795.000 X	=			
MX550200	D I STORM SEWER 300			METER	12.000 X	=			
MX810150	CON ENC C 100 PVC 1X1			METER	40.000 X	=			
MX816010	UD 3#6XLP 1#8G 30P			METER	1,710.000 X	=			
MX873030	ELCBL C 20 3C TW SH			METER	80.000 X	=			
MX873078	ELCBL C COM 16 5 1/2			METER	220.000 X	=			
MZ000990	AGG FOR TEMP ACCESS			M TON	50.000 X	=			
MZ001065	AGG SUBGRADE 450			SQ M	14,780.000 X	=			
MZ062000	SAW CUTTING			METER	221.000 X	=			
M2010110	TREE REMOV 6-15			UNIT	110.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 2
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
				DOLLARS	CENTS	DOLLARS	CTS
M2020010	EARTH EXCAVATION	CU M	3,662.000	X	=		
M2021200	REM & DISP UNS MATL	CU M	4,281.000	X	=		
M2070420	POROUS GRAN EMB SUBGR	CU M	807.000	X	=		
M2080150	TRENCH BACKFILL	CU M	381.000	X	=		
M2113100	TOPSOIL F & P 100	SQ M	10,844.000	X	=		
M2130103	EXPLOR TRENCH 1.3	METER	12.000	X	=		
M2500210	SEEDING CL 2A	HA	0.560	X	=		
M2500350	SEEDING CL 7	HA	0.240	X	=		
M2500400	NITROGEN FERT NUTR	KG	80.000	X	=		
M2500500	PHOSPHORUS FERT NUTR	KG	80.000	X	=		
M2500600	POTASSIUM FERT NUTR	KG	80.000	X	=		
M2510115	MULCH METHOD 2	HA	0.800	X	=		
M2520110	SODDING SALT TOLERANT	SQ M	2,875.000	X	=		
M2520200	SUPPLE WATERING	UNIT	330.000	X	=		
M2800400	PERIMETER EROS BAR	METER	211.000	X	=		

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 3
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	CTS
				DOLLARS	CENTS	DOLLARS	
M3511150	AGG BASE CSE B 150	SQ M	342.000 X	=			
M4060100	BIT MATLS PR CT	LITER	1,050.000 X	=			
M4060740	BIT C BIND CSE T2	M TON	3.000 X	=			
M4200250	PCC PVT 250	SQ M	8,316.000 X	=			
M4205200	PROTECTIVE COAT	SQ M	5,500.000 X	=			
M4240125	PC CONC SIDEWALK 125	SQ M	864.000 X	=			
M4402000	PAVEMENT REM	SQ M	437.000 X	=			
M4402040	COMB CURB GUTTER REM	METER	306.000 X	=			
M4402050	SIDEWALK REM	SQ M	331.000 X	=			
M4812150	AGGREGATE SHLDS B 150	SQ M	343.000 X	=			
M4820150	BIT SHOULDERS 150	SQ M	1,883.000 X	=			
M5080105	REINFORCEMENT BARS	KG	253.000 X	=			
M542E112	PRC FL-END SEC 300	EACH	2.000 X	=			
M542E116	PRC FL-END SEC 375	EACH	4.000 X	=			
M542E120	PRC FL-END SEC 450	EACH	1.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 4
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	CTS
				DOLLARS	CENTS		
M542H020	P CUL CL A 1 300	METER	3.000 X	=			
M542H025	P CUL CL A 1 375	METER	25.000 X	=			
M5500030	STORM SEW CL A 1 300	METER	468.000 X	=			
M5500050	STORM SEW CL A 1 450	METER	5.000 X	=			
M6020140	CB A 1.2M D T8G	EACH	1.000 X	=			
M6020157	CB A 1.2M D T11V F&G	EACH	3.000 X	=			
M6021440	MAN A 1.2D T8G	EACH	1.000 X	=			
M6021511	MAN A 1.2D/MI 604101	EACH	6.000 X	=			
M6021911	MAN A 1.8D/MI 604101	EACH	1.000 X	=			
M6060070	CONC CURB TB	METER	25.000 X	=			
M6060500	COMB CC&G TB15.30	METER	328.000 X	=			
M6060700	COMB CC&G TB15.60	METER	247.000 X	=			
M6064100	CONC MED TSB15.30	SQ M	327.000 X	=			
M6300110	SPBGR TY B	METER	15.000 X	=			
M7030100	SHORT-TERM PAVT MKING	METER	2,000.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 5
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	CTS
				DOLLARS	CENTS	DOLLARS	
M7030210	TEMP PVT MK LTR & SYM	SQ M	58.000 X	=			
M7030220	TEMP PVT MK LINE 100	METER	3,000.000 X	=			
M7030520	PAVT MARK TAPE T3 100	METER	1,110.000 X	=			
M7200100	SIGN PANEL T1	SQ M	2.300 X	=			
M7800100	THPL PVT MK LTR & SYM	SQ M	83.000 X	=			
M7800105	THPL PVT MK LINE 100	METER	3,807.000 X	=			
M7800115	THPL PVT MK LINE 150	METER	468.000 X	=			
M7800125	THPL PVT MK LINE 300	METER	197.000 X	=			
M7800140	THPL PVT MK LINE 600	METER	71.000 X	=			
M8070140	GROUND ROD 19 X 3.0	EACH	38.000 X	=			
M8100060	CON T 50 GALVS	METER	53.000 X	=			
M8100080	CON T 75 GALVS	METER	35.000 X	=			
M8100100	CON T 100 GALVS	METER	28.000 X	=			
M8101070	CON P 75 GALVS	METER	195.000 X	=			
M8101090	CON P 100 GALVS	METER	35.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 6
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	CTS
				DOLLARS	CENTS		
M8150200	TR & BKFIL F ELECT WK	METER	1,681.000 X	=			
M8170020	EC C XLP USE 1C 10	METER	300.000 X	=			
M8170100	EC C XLP USE 1C 4/0	METER	165.000 X	=			
M8304415	LP S SQT 10.5MH 1.8MA	EACH	32.000 X	=			
M8360100	LIGHT POLE FDN 600	METER	102.000 X	=			
M8731210	ELCBL C SIGNAL 14 2C	METER	130.000 X	=			
M8731220	ELCBL C SIGNAL 14 3C	METER	210.000 X	=			
M8731240	ELCBL C SIGNAL 14 5C	METER	200.000 X	=			
M8731250	ELCBL C SIGNAL 14 7C	METER	290.000 X	=			
M8731800	ELCBL C SERV 6 2C	METER	20.000 X	=			
M8750510	TS POST GALVS 4.85	EACH	4.000 X	=			
M8750530	TS POST GALVS 5.45	EACH	1.000 X	=			
M8770725	STL COMB MAA&P 7.31	EACH	1.000 X	=			
M8770740	STL COMB MAA&P 9.14	EACH	1.000 X	=			
M8780100	CONC FDN TY A	METER	6.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 7
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	CTS
				DOLLARS	CENTS	DOLLARS	
M8780200	CONC FDN TY D	METER	1.200 X	=			
M8780400	CONC FDN TY E 750D	METER	9.200 X	=			
XX001874	PERM DITCH CHECKS	EACH	1.000 X	=			
XX003553	VIDEO TRANS SYS	EACH	1.000 X	=			
XX003722	LT CON CONSOL 240/480	EACH	1.000 X	=			
XX006023	LP S ST 10.5MH D1.8MA	EACH	2.000 X	=			
XX006024	BR B V CS-370 14.5 BC	EACH	34.000 X	=			
XX006025	INTER MONITOR MODULE	EACH	1.000 X	=			
XX006026	REMOTE-CONTR VID SYS	EACH	1.000 X	=			
XX006027	VID DET SYSTEM (C I)	EACH	1.000 X	=			
XX006028	PED SH LED 1F, BM CT	EACH	4.000 X	=			
X0301769	DRILL-GROUT #20 T-BAR	EACH	264.000 X	=			
X7015050	PORT CHANGE MESS SIGN	CAL MO	50.000 X	=			
X8050015	SERV INSTALL POLE MT	EACH	1.000 X	=			
X8800020	SH LED 1F 3S MAM	EACH	2.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 8
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
				DOLLARS	CENTS	DOLLARS	CTS
X8800035	SH LED 1F 3S BM	EACH	3.000 X	=			
X8800040	SH LED 1F 5S BM	EACH	2.000 X	=			
X8800045	SH LED 1F 5S MAM	EACH	2.000 X	=			
X8800070	SH LED 2F 5S BM	EACH	1.000 X	=			
Z0013798	CONSTRUCTION LAYOUT	L SUM	1.000 X	=			
Z0048665	RR PROT LIABILITY INS	L SUM	1.000 X	=			
Z0076600	TRAINEES	HOOR	1,000.000 X	0.80	=	800.00	
28000500	INLET & PIPE PROTECT	EACH	4.000 X	=			
60240312	INLETS TB T11V F&G	EACH	5.000 X	=			
60250200	CB ADJUST	EACH	4.000 X	=			
60255500	MAN ADJUST	EACH	2.000 X	=			
60260100	INLETS ADJUST	EACH	1.000 X	=			
60265700	VV ADJUST	EACH	2.000 X	=			
60406100	FR & LIDS T1 CL	EACH	5.000 X	=			
63100045	TRAF BAR TERM T2	EACH	1.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 9
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
				DOLLARS	CENTS	DOLLARS	CTS
63100167	TR BAR TRM T1 SPL TAN	EACH	1.000 X	=			
66600105	FUR ERECT ROW MARKERS	EACH	6.000 X	=			
66700205	PERM SURV MKRS T1	EACH	1.000 X	=			
67000400	ENGR FIELD OFFICE A	CAL MO	12.000 X	=			
70101700	TRAF CONT & PROT	L SUM	1.000 X	=			
80400100	ELECT SERV INSTALL	EACH	1.000 X	=			
80400200	ELECT UTIL SERV CONN	L SUM	1.000 X	=			
81400100	HANDHOLE	EACH	1.000 X	=			
81400300	DBL HANDHOLE	EACH	2.000 X	=			
82102250	LUM SV HOR MT 250W	EACH	36.000 X	=			
82103250	LUM SV HOR MT PC 250W	EACH	2.000 X	=			
84200500	REM EX LT UNIT SALV	EACH	6.000 X	=			
84200700	LIGHTING FDN REMOV	EACH	6.000 X	=			
85700200	FAC T4 CAB	EACH	1.000 X	=			
88200110	TS BACKPLATE LOUVERED	EACH	4.000 X	=			

FAU 2657
93-00081-04-CH
LAKE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF PRICES
CONTRACT NUMBER - 83656

ECMS002 DTGECM03 ECMR003 PAGE 10
RUN DATE - 09/30/04
RUN TIME - 204614

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
				DOLLARS	CENTS	DOLLARS	CTS
88700200	LIGHT DETECTOR	EACH	2.000 X		=		
88700300	LIGHT DETECTOR AMP	EACH	1.000 X		=		
88800100	PED PUSH-BUTTON	EACH	4.000 X		=		

TOTAL \$

NOTE:

1. EACH PAY ITEM SHOULD HAVE A UNIT PRICE AND A TOTAL PRICE.
2. THE UNIT PRICE SHALL GOVERN IF NO TOTAL PRICE IS SHOWN OR IF THERE IS A DISCREPANCY BETWEEN THE PRODUCT OF THE UNIT PRICE MULTIPLIED BY THE QUANTITY.
3. IF A UNIT PRICE IS OMITTED, THE TOTAL PRICE WILL BE DIVIDED BY THE QUANTITY IN ORDER TO ESTABLISH A UNIT PRICE.
4. A BID MAY BE DECLARED UNACCEPTABLE IF NEITHER A UNIT PRICE NOR A TOTAL PRICE IS SHOWN.

RETURN WITH BID

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

A. Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.

B. In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.

C. In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

II. ASSURANCES

A. The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

(a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.

(b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.

(e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$150,700.00. Sixty percent of the salary is \$90,420.00.

RETURN WITH BID

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

(a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

H. Confidentiality

1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

RETURN WITH BID

I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

III. CERTIFICATIONS

A. The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

- (a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:

- (1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or

- (2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.

- (b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:

- (1) the business has been finally adjudicated not guilty; or

- (2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.

- (c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.

- (d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

C. Educational Loan

1. Section 3 of the Educational Loan Default Act provides:

§ 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.

2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

D. Bid-Rigging/Bid Rotating

1. Section 33E-11 of the Criminal Code of 1961 provides:

§ 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

RETURN WITH BID

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

E. International Anti-Boycott

1. Section 5 of the International Anti-Boycott Certification Act provides:

§ 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.

2. The bidder makes the certification set forth in Section 5 of the Act.

F. Drug Free Workplace

1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.

2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:

(a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.

(b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.

(c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.

(d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.

(e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.

(f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.

(g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

G. Debt Delinquency

1. The Illinois Procurement Code provides:

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder certifies that it, or any affiliate, is not barred from being awarded a contract under 30 ILCS 500. Section 50-11 prohibits a person from entering into a contract with a State agency if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The contractor further acknowledges that the contracting State agency may declare the contract void if this certification is false or if the contractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

H. Sarbanes-Oxley Act of 2002

1. The Illinois Procurement Code provides:

Section 50-60(c).

The contractor certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 for a period of five years prior to the date of the bid or contract. The contractor acknowledges that the contracting agency shall declare the contract void if this certification is false.

I. ADDENDA

The contractor or bidder certifies that all relevant addenda have been incorporated in to this contract. Failure to do so may cause the bid to be declared unacceptable.

J. Section 42 of the Environmental Protection Act

The contractor certifies in accordance with 30 ILCS 500/50-12 that the bidder or contractor is not barred from being awarded a contract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The contractor acknowledges that the contracting agency may declare the contract void if this certification is false.

K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the bidder certifies that it is a participant, either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and each of its subcontractors. Unless otherwise directed in writing by the Department, applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted may be indicated as to be subcontracted.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

IV. DISCLOSURES

A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. **Disclosure Forms.** Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.**

C. Disclosure Form Instructions

Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may sign the following certification statement indicating that the information previously submitted by the bidder is, as of the date of signature, current and accurate. The Certification must be signed and dated by a person who is authorized to execute contracts for the bidding company. Before signing this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder signs the Certification, the Bidder should proceed to Form B instructions.

CERTIFICATION STATEMENT

I have determined that the Form A disclosure information previously submitted is current and accurate, and all forms are hereby incorporated by reference in this bid. Any necessary additional forms or amendments to previously submitted forms are attached to this bid.

(Bidding Company)

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date

Form A: For bidders who have NOT previously submitted the information requested in Form A

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

1. Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES ___ NO ___
2. Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$90,420.00? YES ___ NO ___
3. Does anyone in your organization receive more than \$90,420.00 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES ___ NO ___
4. Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$90,420.00? YES ___ NO ___
(Note: Only one set of forms needs to be completed per person per bid even if a specific individual would require a yes answer to more than one question.)

A "YES" answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the bidding entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is authorized to execute contracts for your organization. **Photocopied or stamped signatures are not acceptable.** The person signing can be, but does not have to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.

If the answer to each of the above questions is "NO", then the NOT APPLICABLE STATEMENT on page 2 of Form A must be signed and dated by a person that is authorized to execute contracts for your company.

Form B: Identifying Other Contracts & Procurement Related Information Disclosure Form B must be completed for each bid submitted by the bidding entity. It must be signed by an individual who is authorized to execute contracts for the bidding entity. Note: Signing the NOT APPLICABLE STATEMENT on Form A does not allow the bidder to ignore Form B. Form B must be completed, signed and dated or the bidder may be considered nonresponsive and the bid will not be accepted.

The Bidder shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the signature box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:

Option I: If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an attached sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts and are not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development Board must be included. Bidders who submit Affidavits of Availability are suggested to use Option II.

Option II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type "See Affidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the Affidavit of Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.

D. Bidders Submitting More Than One Bid

Bidders submitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. Please indicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms by reference.

- The bid submitted for letting item _____ contains the Form A disclosures or Certification Statement and the Form B disclosures. The following letting items incorporate the said forms by reference:

RETURN WITH BID/OFFER

**ILLINOIS DEPARTMENT
OF TRANSPORTATION**

**Form A
Financial Information &
Potential Conflicts of Interest
Disclosure**

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)

Disclosure of the information contained in this Form is required by the Section 50-35 of the Illinois Procurement Code (30 ILCS 500). Vendors desiring to enter into a contract with the State of Illinois must disclose the financial information and potential conflict of interest information as specified in this Disclosure Form. This information shall become part of the publicly available contract file. This Form A must be completed for bids in excess of \$10,000, and for all open-ended contracts. **A publicly traded company may submit a 10K disclosure (or equivalent if applicable) in satisfaction of the requirements set forth in Form A. See Disclosure Form Instructions.**

DISCLOSURE OF FINANCIAL INFORMATION

1. Disclosure of Financial Information. The individual named below has an interest in the BIDDER (or its parent) in terms of ownership or distributive income share in excess of 5%, or an interest which has a value of more than \$90,420.00 (60% of the Governor's salary as of 7/1/01). **(Make copies of this form as necessary and attach a separate Disclosure Form A for each individual meeting these requirements)**

FOR INDIVIDUAL (type or print information)

NAME: _____

ADDRESS _____

Type of ownership/distributable income share:

stock _____ sole proprietorship _____ Partnership _____ other: (explain on separate sheet):
% or \$ value of ownership/distributable income share: _____

2. Disclosure of Potential Conflicts of Interest. Check "Yes" or "No" to indicate which, if any, of the following potential conflict of interest relationships apply. If the answer to any question is "Yes", please attach additional pages and describe.

(a) State employment, currently or in the previous 3 years, including contractual employment of services.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

- Are you currently an officer or employee of either the Capitol Development Board or the Illinois Toll Highway Authority? Yes ___ No ___
- Are you currently appointed to or employed by any agency of the State of Illinois? If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name the State agency for which you are employed and your annual salary. _____

RETURN WITH BID/OFFER

3. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes ___ No ___
4. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or minor children entitled to receive (i) more than 15% in aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor? Yes ___ No ___

(b) State employment of spouse, father, mother, son, or daughter, including contractual employment for services in the previous 2 years.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

1. Is your spouse or any minor children currently an officer or employee of the Capitol Development Board or the Illinois Toll Highway Authority? Yes ___ No ___
2. Is your spouse or any minor children currently appointed to or employed by any agency of the State of Illinois? If your spouse or minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name of the spouse and/or minor children, the name of the State agency for which he/she is employed and his/her annual salary. _____
-
3. If your spouse or any minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the salary of the Governor as of 7/1/01) are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of the salary of the Governor? Yes ___ No ___
4. If your spouse or any minor children are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) are you and your spouse or any minor children entitled to receive (i) more than 15% in the aggregate of the total distributable income from your firm, partnership, association or corporation, or (ii) an amount in excess of 2 times the salary of the Governor? Yes ___ No ___

(c) Elective status; the holding of elective office of the State of Illinois, the government of the United States, any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois currently or in the previous 3 years. Yes ___ No ___

(d) Relationship to anyone holding elective office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(e) Appointive office; the holding of any appointive government office of the State of Illinois, the United State of America, or any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois, which office entitles the holder to compensation in excess of the expenses incurred in the discharge of that office currently or in the previous 3 years. Yes ___ No ___

(f) Relationship to anyone holding appointive office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(g) Employment, currently or in the previous 3 years, as or by any registered lobbyist of the State government. Yes ___ No ___

RETURN WITH BID/OFFER

(h) Relationship to anyone who is or was a registered lobbyist in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(i) Compensated employment, currently or in the previous 3 years, by any registered election or reelection committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

(j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a compensated employee in the last 2 years by any registered election or re-election committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

APPLICABLE STATEMENT

This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on previous page.

Completed by: _____
Name of Authorized Representative (type or print)

Completed by: _____
Title of Authorized Representative (type or print)

Completed by: _____
Signature of Individual or Authorized Representative Date

NOT APPLICABLE STATEMENT

I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A.

This Disclosure Form A is submitted on behalf of the CONTRACTOR listed on the previous page.

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative Date

RETURN WITH BID/OFFER

ILLINOIS DEPARTMENT
OF TRANSPORTATION

Form B
Other Contracts &
Procurement Related Information
Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)

Disclosure of the information contained in this Form is required by the Section 50-35 of the Illinois Procurement Act (30 ILCS 500). This information shall become part of the publicly available contract file. This Form B must be completed for bids in excess of \$10,000, and for all open-ended contracts.

DISCLOSURE OF OTHER CONTRACTS AND PROCUREMENT RELATED INFORMATION

1. Identifying Other Contracts & Procurement Related Information. The BIDDER shall identify whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other State of Illinois agency: Yes ___ No ___

If "No" is checked, the bidder only needs to complete the signature box on the bottom of this page.

2. If "Yes" is checked. Identify each such relationship by showing State of Illinois agency name and other descriptive information such as bid or project number (attach additional pages as necessary). SEE DISCLOSURE FORM INSTRUCTIONS:

THE FOLLOWING STATEMENT MUST BE SIGNED

_____ Name of Authorized Representative (type or print)	
_____ Title of Authorized Representative (type or print)	
_____ Signature of Authorized Representative	_____ Date

RETURN WITH BID

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.

RETURN WITH BID

Contract No. 83656
LAKE County
Section 93-00081-04-CH
Project CMM-7003(772)
Route FAU 2657 (Buffalo Grove Road)
District 1 Construction Funds

PART II. WORKFORCE PROJECTION - continued

- B. Included in "Total Employees" under Table A is the total number of **new hires** that would be employed in the event the undersigned bidder is awarded this contract.

The undersigned bidder projects that: (number) _____ new hires would be recruited from the area in which the contract project is located; and/or (number) _____ new hires would be recruited from the area in which the bidder's principal office or base of operation is located.

- C. Included in "Total Employees" under Table A is a projection of numbers of persons to be employed directly by the undersigned bidder as well as a projection of numbers of persons to be employed by subcontractors.

The undersigned bidder estimates that (number) _____ persons will be directly employed by the prime contractor and that (number) _____ persons will be employed by subcontractors.

PART III. AFFIRMATIVE ACTION PLAN

- A. The undersigned bidder understands and agrees that in the event the foregoing minority and female employee utilization projection included under **PART II** is determined to be an underutilization of minority persons or women in any job category, and in the event that the undersigned bidder is awarded this contract, he/she will, prior to commencement of work, develop and submit a written Affirmative Action Plan including a specific timetable (geared to the completion stages of the contract) whereby deficiencies in minority and/or female employee utilization are corrected. Such Affirmative Action Plan will be subject to approval by the contracting agency and the **Department of Human Rights**.
- B. The undersigned bidder understands and agrees that the minority and female employee utilization projection submitted herein, and the goals and timetable included under an Affirmative Action Plan if required, are deemed to be part of the contract specifications.

Company _____

Telephone Number _____

Address _____

NOTICE REGARDING SIGNATURE

The Bidder's signature on the Proposal Signature Sheet will constitute the signing of this form. The following signature block needs to be completed only if revisions are required.

Signature: _____ Title: _____ Date: _____

Instructions: All tables must include subcontractor personnel in addition to prime contractor personnel.

Table A - Include both the number of employees that would be hired to perform the contract work and the total number currently employed (Table B) that will be allocated to contract work, and include all apprentices and on-the-job trainees. The "Total Employees" column should include all employees including all minorities, apprentices and on-the-job trainees to be employed on the contract work.

Table B - Include all employees currently employed that will be allocated to the contract work including any apprentices and on-the-job trainees currently employed.

Table C - Indicate the racial breakdown of the total apprentices and on-the-job trainees shown in Table A.

BC-1256-Pg. 2 (Rev. 3/98)

RETURN WITH BID

ADDITIONAL FEDERAL REQUIREMENTS

In addition to the Required Contract Provisions for Federal-Aid Construction Contracts (FHWA 1273), all bidders make the following certifications.

- A. By the execution of this proposal, the signing bidder certifies that the bidding entity has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with the submitted bid. This statement made by the undersigned bidder is true and correct under penalty of perjury under the laws of the United States.
- B. CERTIFICATION, EQUAL EMPLOYMENT OPPORTUNITY:
1. Have you participated in any previous contracts or subcontracts subject to the equal opportunity clause. YES _____ NO _____
 2. If answer to #1 is yes, have you filed with the Joint Reporting Committee, the Director of OFCC, any Federal agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements of those organizations?
YES _____ NO _____

RETURN WITH BID

**Contract No. 83656
LAKE County
Section 93-00081-04-CH
Project CMM-7003(772)
Route FAU 2657 (Buffalo Grove Road)
District 1 Construction Funds**

PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

(IF AN INDIVIDUAL)

Firm Name _____

Signature of Owner _____

Business Address _____

(IF A CO-PARTNERSHIP)

Firm Name _____

By _____

Business Address _____

Name and Address of All Members of the Firm: _____

(IF A CORPORATION)

Corporate Name _____

By _____

Signature of Authorized Representative _____

Typed or printed name and title of Authorized Representative _____

(IF A JOINT VENTURE, USE THIS SECTION FOR THE MANAGING PARTY AND THE SECOND PARTY SHOULD SIGN BELOW)

Attest _____

Signature _____

Business Address _____

(IF A JOINT VENTURE)

Corporate Name _____

By _____

Signature of Authorized Representative _____

Typed or printed name and title of Authorized Representative _____

Attest _____

Signature _____

Business Address _____

If more than two parties are in the joint venture, please attach an additional signature sheet.

RETURN WITH BID



**Illinois Department
of Transportation**

**Division of Highways
Proposal Bid Bond**
(Effective November 1, 1992)

Item No. _____
Letting Date _____

KNOW ALL MEN BY THESE PRESENTS, That We _____

as PRINCIPAL, and _____

_____ as SURETY, are held jointly, severally and firmly bound unto the STATE OF ILLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in Article 102.09 of the "Standard Specifications for Road and Bridge Construction" in effect on the date of invitation for bids, whichever is the lesser sum, well and truly to be paid unto said STATE OF ILLINOIS, for the payment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.

THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH, That Whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF ILLINOIS, acting through the Department of Transportation, for the improvement designated by the Transportation Bulletin Item Number and Letting Date indicated above.

NOW, THEREFORE, if the Department shall accept the bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in the bidding and contract documents, submit a DBE Utilization Plan that is accepted and approved by the Department; and if, after award by the Department, the PRINCIPAL shall enter into a contract in accordance with the terms of the bidding and contract documents including evidence of the required insurance coverages and providing such bond as specified with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof; or if, in the event of the failure of the PRINCIPAL to make the required DBE submission or to enter into such contract and to give the specified bond, the PRINCIPAL pays to the Department the difference not to exceed the penalty hereof between the amount specified in the bid proposal and such larger amount for which the Department may contract with another party to perform the work covered by said bid proposal, then this obligation shall be null and void, otherwise, it shall remain in full force and effect.

IN THE EVENT the Department determines the PRINCIPAL has failed to comply with any requirement as set forth in the preceding paragraph, then Surety shall pay the penal sum to the Department within fifteen (15) days of written demand therefor. If Surety does not make full payment within such period of time, the Department may bring an action to collect the amount owed. Surety is liable to the Department for all its expenses, including attorney's fees, incurred in any litigation in which it prevails either in whole or in part.

In TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this _____ day of _____ A.D., ____.

PRINCIPAL

SURETY

(Company Name)

(Company Name)

By: _____ By: _____
(Signature & Title) (Signature of Attorney-in-Fact)

Notary Certification for Principal and Surety

STATE OF ILLINOIS,
COUNTY OF _____

I, _____, a Notary Public in and for said County, do hereby certify that
_____ and _____

(Insert names of individuals signing on behalf of PRINCIPAL & SURETY)

who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and SURETY, appeared before me this day in person and acknowledged respectively, that they signed and delivered said instrument as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notarial seal this _____ day of _____, A.D. _____.

My commission expires _____
Notary Public

In lieu of completing the above section of the Proposal Bid Form, the Principal may file an Electronic Bid Bond. By signing below the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the State of Illinois under the conditions of the bid bond as shown above.

Electronic Bid Bond ID# _____

Company/Bidder Name _____

Signature and Title _____

PROPOSAL ENVELOPE



Illinois Department
of Transportation

PROPOSALS

for construction work advertised for bids by the
Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:
Address:
Phone No.

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 323
Illinois Department of Transportation
2300 South Dirksen Parkway
Springfield, Illinois 62764

NOTICE

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 83656
LAKE County
Section 93-00081-04-CH
Project CMM-7003(772)
Route FAU 2657 (Buffalo Grove Road)
District 1 Construction Funds



Illinois Department of Transportation



NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS.** Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., November 5, 2004. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.
- 2. DESCRIPTION OF WORK.** The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

**Contract No. 83656
LAKE County
Section 93-00081-04-CH
Project CMM-7003(772)
Route FAU 2657 (Buffalo Grove Road)
District 1 Construction Funds**

Project consists of 1.78 miles of reconstruction of a 3-lane bituminous concrete roadway, removal and replacement of storm sewer system, sidewalks, curb and gutter, traffic signal modernization, street lighting and landscaping at Port Clinton Road and Prairie Road.

- 3. INSTRUCTIONS TO BIDDERS.** (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.

(b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS.** This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the
Illinois Department of Transportation

Timothy W. Martin, Secretary

BD 351 (Rev. 01/2003)

CHECKSHEET
FOR
SUPPLEMENTAL SPECIFICATIONS
AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2004 (Rev. 7/1/04)

This sheet contains a listing of the ERRATA, and SUPPLEMENTAL SPECIFICATIONS, frequently used RECURRING SPECIAL PROVISIONS and RECURRING LOCAL ROADS AND STREETS SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-02) (Revised 1-1-04)

Page vi - xviii

SUPPLEMENTAL SPECIFICATIONS

<u>Std. Spec. Sec.</u>		<u>Page No.</u>
101	Definition of Terms	1
105	Control of Work.....	2
205	Embankment	3
251	Mulch	4
440	Removal of Existing Pavement and Appurtenances	5
442	Pavement Patching	6
449	Removal and Replacement of Preformed Elastomeric Compression Joint Seal.....	7
501	Removal of Existing Structures	8
503	Concrete Structures.....	9
505	Steel Structures	10
506	Cleaning and Painting Metal Surfaces	13
508	Reinforcement Bars.....	14
512	Piling.....	15
540	Box Culverts	16
669	Removal and Disposal of Regulated Substances	18
671	Mobilization.....	19
702	Work Zone Traffic Control Devices.....	20
1003	Fine Aggregates	21
1004	Coarse Aggregate	22
1020	Portland Cement Concrete.....	25
1021	Concrete Admixtures	32
1022	Concrete Curing Materials.....	33
1024	Nonshrink Grout	35
1056	Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert pipe	37
1060	Waterproofing Materials	38
1069	Pole and Tower	39
1070	Foundation and Breakaway Devices	40
1077	Post and Foundation	42
1080	Fabric Materials	43
1083	Elastomeric Bearings.....	46
1094	Overhead Sign Structures	47
1103	Portland Cement Concrete Equipment.....	48

The following RECURRING SPECIAL PROVISIONS and RECURRING LOCAL ROADS AND STREETS SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

RECURRING SPECIAL PROVISIONS

<u>CHECK SHEET #</u>		<u>PAGE NO.</u>
1	<input checked="" type="checkbox"/> State Required Contract Provision All Federal-aid Construction Contracts (Eff. 2-1-69) (Rev. 10-1-83)	49
2	<input checked="" type="checkbox"/> Subletting of Contracts (Federal Aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93).....	51
3	<input checked="" type="checkbox"/> EEO (Eff. 7-21-78) (Rev. 11-18-80).....	52
4	<input type="checkbox"/> Specific Equal Employment Opportunity Responsibilities Non Federal-aid Contracts (Eff. 3-20-69) (Rev. 1-1-94).....	63
5	<input type="checkbox"/> Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 4-1-93)	69
6	<input type="checkbox"/> Reserved	74
7	<input type="checkbox"/> Asphalt Quantities and Cost Reviews (Eff. 7-1-88)	75
8	<input checked="" type="checkbox"/> National Pollutant Discharge Elimination System Permit (Eff 7-1-94) (Rev. 1-1-03).....	76
9	<input type="checkbox"/> Haul Road Stream Crossings, Other Temporary Stream Crossings, and In-Stream Work Pads (Eff. 1-2-92) (Rev. 1-1-98)	77
10	<input type="checkbox"/> Construction Layout Stakes Except for Structure" (Eff. 1-1-99) (Rev. 1-1-02)	78
11	<input checked="" type="checkbox"/> Construction Layout Stakes (Eff. 5-1-93) (Rev. 1-1-02)	81
12	<input type="checkbox"/> Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-97).....	84
13	<input type="checkbox"/> Asphaltic Emulsion Slurry Seal and Fibrated Asphaltic Emulsion Slurry Seal (Eff. 8-1-89) (Rev. 2-1-97)	86
14	<input type="checkbox"/> Bituminous Surface Treatment Half-Smart (Eff. 7-1-93) (Rev. 1-1-97)	92

15	<input checked="" type="checkbox"/>	Quality Control/Quality Assurance of Bituminous Concrete Mixtures (Eff. 1-1-00) (Rev. 1-1-04)	98
16	<input type="checkbox"/>	Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 2-1-95)	117
17	<input type="checkbox"/>	Bituminous Surface Removal (Cold Milling) (Eff. 11-1-87) (Rev. 10-15-97)	121
18	<input type="checkbox"/>	Resurfacing of Milled Surfaces (Eff. 10-1-95)	123
19	<input type="checkbox"/>	PCC Partial Depth Bituminous Patching (Eff. 1-1-98)	124
20	<input type="checkbox"/>	Patching with Bituminous Overlay Removal (Eff. 10-1-95) (Rev. 7-1-99)	126
21	<input type="checkbox"/>	Reserved	128
22	<input type="checkbox"/>	Protective Shield System (Eff. 4-1-95) (Rev. 1-1-03)	129
23	<input type="checkbox"/>	Polymer Concrete (Eff. 8-1-95) (Rev. 1-1-04)	131
24	<input type="checkbox"/>	Controlled Low Strength Material (CLSM) (Eff. 1-1-90) (Rev. 1-1-00)	133
25	<input type="checkbox"/>	Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-98)	138
26	<input type="checkbox"/>	Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	139
27	<input type="checkbox"/>	Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-97)	144
28	<input checked="" type="checkbox"/>	Give em a Brake Sign (Eff. 8-1-89) (Rev. 8-1-91)	146
29	<input type="checkbox"/>	Portable Changeable Message Signs (Rev. 2/1/96).	147
30	<input type="checkbox"/>	Reserved	148
31	<input type="checkbox"/>	Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	149
32	<input type="checkbox"/>	Reserved	150
33	<input checked="" type="checkbox"/>	English Substitution of Metric Bolts (Eff. 7-1-96)	151
34	<input checked="" type="checkbox"/>	English Substitution of Metric Reinforcement Bars (Eff. 4-1-96) (Rev. 1-1-03)	152
35	<input type="checkbox"/>	Polymer Modified Emulsified Asphalt (Eff. 1-1-04)	154
36	<input type="checkbox"/>	Corrosion Inhibitor (Eff. 3-1-90) (Rev. 7-1-99)	156
37	<input type="checkbox"/>	QC of Concrete Mixtures at the Plant - Single A (Eff. 8-1-00) (Rev. 1-1-04)	157
38	<input type="checkbox"/>	QC of Concrete Mixtures at the Plant - Double A (Eff. 8-1-00) (Rev. 1-1-04)	163
39	<input checked="" type="checkbox"/>	Quality Control/Quality Assurance of Concrete Mixtures (Eff. 4-1-92) (Rev. 1-1-04)	171
40	<input checked="" type="checkbox"/>	Traffic Barrier Terminal Type 1, Special (Eff. 8-1-94) (Rev. 1-1-03)	185
41	<input type="checkbox"/>	Reserved	186
42	<input type="checkbox"/>	Segregation Control of Bituminous Concrete (Eff. 7-15-97)	187
43	<input type="checkbox"/>	Reserved	190

RECURRING LOCAL ROADS AND STREETS SPECIAL PROVISIONS

<u>CHECK SHEET #</u>	<u>PAGE NO.</u>
LRS 1 <input checked="" type="checkbox"/> Cooperation With Utilities (Eff. 1-1-99) (Rev. 1-1-02)	192
LRS 2 <input type="checkbox"/> Furnished Excavation (Eff. 1-1-99) (Rev. 1-1-02)	194
LRS 3 <input checked="" type="checkbox"/> Construction Zone Traffic Control (Eff. 1-1-99)	195
LRS 4 <input checked="" type="checkbox"/> Flaggers in Work Zones (Eff. 1-1-99)	196
LRS 5 <input type="checkbox"/> Reserved	197
LRS 6 <input type="checkbox"/> Bidding Requirements and Conditions for Contract Proposals (Eff. 1-1-02)	198
LRS 7 <input type="checkbox"/> Bidding Requirements and Conditions for Material Proposals (Eff. 1-1-02)	204
LRS 8 <input type="checkbox"/> Failure to Complete the Work on Time (Eff. 1-1-99)	210
LRS 9 <input type="checkbox"/> Bituminous Surface Treatments (Eff. 1-1-99)	211
LRS 10 <input type="checkbox"/> Reflective Sheeting Type C (Eff. 1-1-99) (Rev. 1-1-02)	212
LRS 11 <input type="checkbox"/> Employment Practices (Eff. 1-1-99)	213
LRS 12 <input type="checkbox"/> Wages of Employees on Public Works (Eff. 1-1-99)	215
LRS 13 <input type="checkbox"/> Selection of Labor (Eff. 1-1-99)	216

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
STATUS OF UTILITIES TO BE ADJUSTED	2
REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL	3
SEEDING, CLASS 7	3
SODDING, SALT TOLERANT	3
PERMANENT SURVEY MARKER	3
PERMANENT DITCH CHECK	4
TRAFFIC BARRIER TERMINAL, TYPE 1, SPECIAL (TANGENT)	4
POROUS GRANULAR EMBANKMENT, SUBGRADE	4
DRILL AND GROUT #20 TIE BARS	4
SAW CUTTING	4
AGGREGATE SUBGRADE, 450 MM	5
CONSTRUCTION LAYOUT	5
AGGREGATE FOR TEMPORARY ACCESS	5
BITUMINOUS CONCRETE PAVEMENT, SUPERPAVE	6
CURB RAMPS FOR SIDEWALK	13
DUCTILE IRON PIPE, STORM SEWER, 300 MM	15
TRAFFIC SIGNAL SPECIFICATIONS	16
MAST ARM SIGN PANELS	17
INSPECTION OF ELECTRICAL SYSTEMS	18
DAMAGE TO TRAFFIC SIGNAL SYSTEM	18
RESTORATION OF WORK AREA	18
SUBMITTALS	19
MAINTENANCE AND RESPONSIBILITY	19
TRAFFIC SIGNAL INSPECTION (TURN-ON)	23
LIQUIDATED DAMAGES FOR UNTIMELY WORK	25
LOCATION UNDERGROUND FACILITIES	25
ELECTRIC SERVICE INSTALLATION	25
GROUNDING OF TRAFFIC SIGNAL SYSTEMS	28
CONDUIT IN GROUND	29
HANDHOLES	30
GROUNDING CABLE	30
TRAFFIC-ACTUATED CONTROLLER	31
INTERSECTION MONITOR MODULE	31
CONCRETE FOUNDATIONS	31
EMERGENCY VEHICLE PRIORITY SYSTEM	33
PEDESTRIAN PUSH-BUTTON	33

<u>SECTION</u>	<u>PAGE</u>
CONTROLLER CABINET AND PERIPHERAL EQUIPMENT	34
ELECTRIC CABLE	35
STEEL COMBINATION MAST ARM ASSEMBLY AND POLE.....	35
TRAFFIC SIGNAL POST	36
SIGNAL HEADS	36
SIGNAL HEAD, BACKPLATE	37
SIGNAL HEAD, LIGHT EMITTING DIODE	37
VIDEO DETECTION SYSTEM (COMPLETE INTERSECTION)	46
REMOTE-CONTROLLED VIDEO SYSTEM.....	51
VIDEO TRANSMISSION SYSTEM	52
ELECTRIC CABLE IN CONDUIT, COAXIAL.....	53
ELECTRIC CABLE IN CONDUIT, COMMUNICATION, NO. 16, 5-1/2 PAIR	54
ELECTRIC UTILITY SERVICE CONNECTION.....	54
GROUND ROD.....	55
CONDUIT ENCASED CONCRETE, 100 MM DIA., PVC, 1 WIDE X 1 HIGH.....	56
LIGHTING CONTROLLER, CONSOLE TYPE, 240/480 VOLT.....	56
ELECTRIC CABLE IN CONDUIT, TWISTED SHIELD, NO. 20 3/C.....	57
TRENCH AND BACKFILL FOR ELECTRICAL WORK	57
UNIT DUCT	57
LUMINAIRES.....	59
LIGHT POLES	59
BREAKAWAY BASE	59
TRAFFIC CONTROL AND PROTECTION.....	60
STORM WATER POLLUTION PREVENTION PLAN.....	66
INSERTED SPECIAL PROVISIONS.....	75

INDEX LOCAL ROADS AND STREETS SPECIAL PROVISIONS

<u>LR#</u>	<u>TITLE</u>	<u>PAGE</u>
SD 16	"Slab Movement Detection Device" (Eff. 11-1-84).....	
SD 17	"Required Cold Milled Surface Texture" (Eff. 11-1-87).....	
107	"Nationwide Permit No. 14" (Eff. 2-1-04). Developed by the Bureau of Local Roads and Streets..... to outline the necessary requirements to comply with No. 14 permits.	
108	"Combination Bids (Eff. 1-1-94)(Rev. 1-1-02). Developed by the Bureau of Local Roads..... and Streets to allow the revision of working days and calendar days. Revised to incorporate applicable portions of deleted Sections 102 & 103	
109	"Contract Claims" (Eff. 1-1-02) (Rev. 5-1-02). Developed by the Bureau of Local Roads..... and Streets to assist local agencies in handling contract claims.	
212	"Shaping Roadway" (Eff. 8-1-69) (Rev. 1-1-02).....	
302	"Soil-Lime Mixture (Eff. 8-31-95)(Rev. 1-1-02). Developed by the Bureau of Local Roads and Streets to modify Section 302.	
355-1	"Asphalt Stabilized Base Course, Road Mix or Traveling Plant Mix" (Eff. 10-1-73)(Rev. 1-1-02).....	
355-2	"Asphalt Stabilized Base Course, Plant Mix" (Eff. 2-20-63)(Rev. 1-1-02)	
355-3	"Bituminous Aggregate Mixture Base Course" (6-27-66)(Rev. 1-1-02). Developed by the..... Bureau of Materials and Physical Research and the Bureau of Local Roads and Streets to construct a stabilized base course with paving grade asphalt.	
400	"Penetrating Emulsified Prime" (Eff. 4-1-84)(Rev. 1-1-02).....	
402	"Salt Stabilized Surface Course" (Eff. 2-20-63)(Rev. 1-1-02).....	
403-1	"Penetrating Emulsified Asphalt" (Eff. 1-1-94)(Rev. 1-1-02). Developed for bituminous..... surface treatments on roads that require flexibility and penetration due to low traffic volume.	
403-2	Bituminous Hot Mix Sand Seal Coat" (Eff. 8-1-69)(Rev. 1-1-02).....	
420	"PCC Pavement (Special)" (Eff. 5-12-64)(Rev. 1-1-02). Developed by the Bureau..... of Local Roads and Streets to allow local agencies to construct quality PCC pavements for low volume roads.	
430	"Paving Brick and Concrete Pave Pavements and Sidewalks" (Eff 1-1-04) Developed by the Bureau of Local Roads & Streets and the Bureau of Materials & Physical Research to provide statewide requirements for paving brick and concrete paver pavements and sidewalks.	
442	"Bituminous Patching Mixtures for Maintenance Use" (Eff 1-1-04). Developed by the Bureau of Local Roads & Streets to reference approved bituminous patching mixtures.	
451	"Crack Filling Bituminous Pavement with Fiber-Asphalt" (Eff. 10-1-91)(Rev. 1-1-02).....	
503-1	"Furnishing Class SI Concrete" (Eff. 10-1-73)(Rev. 1-1-02).....	
503-2	"Furnishing Class SI Concrete (Short Load)" (Eff. 1-1-89) (Rev. 1-1-02). Developed by the Bureau of Local Roads and Streets to allow a load charge to be added when short loads are expected during the contract.	
542	"Pipe Culverts, Type (Furnished)" (Eff. 9-1-64) (Rev. 1-1-02).....	
663	"Calcium Chloride Applied" (Eff. 6-1-58) (Rev. 1-1-02).....	
701	"Flagger Certification" (Eff. 1-1-93) (Rev. 1-1-02).....	
702	"Construction and Maintenance Signs" (Eff 1-1-04) Developed by the Bureau of Local Roads & Streets to require florescent orange sheeting and minimum sign size of 48" X 48" on construction and maintenance signs.	
1004	"Coarse Aggregate for Bituminous Surface Treatment" (Eff. 1-1-02). Developed by the..... Bureau of Materials & Physical Research, the Bureau of Local Roads & Streets, and Local Agencies to provide a coarser mix when aggregate producers have adjusted the CA-16 gradation according to the Aggregate Gradation Control System (AGCS) to a finer mix for Hot-Mix Asphalt.	
1013	"Rock Salt (Sodium Chloride)" (Eff. 8-1-69) (Rev. 1-1-02).....	

INDEX INTERIM SPECIAL PROVISIONS

<u>ISP#</u>	<u>TITLE</u>	<u>PAGE</u>
ISP #	Title (Effective Date). Description	
04-01a X	"Disadvantage Business Enterprise Participation" (Eff. 11/7/03)(Rev. 6/1/04). Developed by the Bureau of Small Business Enterprises for contracts with DBE goals.	75-81
04-02 X	"Training Special Provisions" (Eff. 10/15/75).....	82-83
04-03 X	"Payment to Subcontractors" (Eff. 6/1/00).(Rev 9/1/03) Developed by the Bureau of Construction to ensure that contractors pay subcontractors for satisfactory performance of their subcontracts within a specific number of days after receipt of each payment made to the contractor, and to require the prompt return of retainage withheld from subcontractors.	84

INDEX INTERIM SPECIAL PROVISIONS (CONT'D)

<u>ISP#</u>	<u>TITLE</u>	<u>PAGE</u>
04-04a	"Additional Bidder Responsibility Evaluation" (Eff 1/1/04) (Rev 4/1/04) Developed by the Office of Chief Council.	
04-05 X	"Partial Payments" (Eff 9/17/03). Developed by the Bureau of Construction to eliminate retainage from our contracts. The special provision for Material Allowances has been incorporated for convenience".	85
04-06 X	"Authority of Railroad Engineer" (Eff 7/1/04).	86
04-07 X	"Railroad Protective Liability Insurance" (Eff. 12/1/86)(Rev. 5/1/88).....	87
04-08 X	"Traffic Control Deficiency Deduction" (Eff. 4/1/92)(Rev. 1/1/03). Developed to ensure.....	88
04-09 X	the prompt response to deficiencies to specified traffic control and protection.	
04-09 X	"Weight Control Deficiency Deduction" (Eff.. 4/1/01) (Rev. 8/1/02). Developed by the.....	89
04-10 X	Bureau of Construction, Office of Chief Counsel, and the Office of Quality to adjust pay based on random truck weighings.	
04-10 X	"Erosion and Sediment Control Deficiency Deduction" (Eff. 8/1/01) (Rev. 11/1/01).....	90
04-11	Developed by the Bureau of Design and Environment and the Bureau of Construction to correct the deduction percentage and to further clarify a "deficiency".	
04-12	"Inlet Filters" (Eff 8/1/03). Developed by the Bureau of Materials and Physical Research and the Illinois Development Council to provide statewide requirements for inlet filters.	
04-13 X	Reserved	
04-14	"Subgrade Preparation" (Eff. 11/01/02). Developed by the Subgrade Stability Manual.....	91
04-15	Committee to reduce the maximum allowable rut depth in subgrades.	
04-16 X	Reserved	
04-17 X	"Notched Wedge Longitudinal Joint" (Eff 7/1/04)	
04-18	"Superpave Bituminous Concrete Mixtures" (Eff. 1/1/00)(Rev. 1/1/04).....	92-97
04-19	Developed by the Bureau of Materials and Physical Research.	
04-20 X	"RAP for Use in Bituminous Concrete Mixtures" (Eff. 1/1/00)(Rev. 4/1/02).....	98-100
04-21	Revised by the Bureau of Materials and Physical Research to allow RAP from routes or airfields under federal and local agency jurisdiction, improving the consistency of conglomerate RAP, and allowing RAP from BAM to be worked back into stabilized subbase and BAM shoulders.	
04-22	Reserved	
04-23	"Superpave Bituminous Concrete Mixtures (Low ESAL)" (Eff. 1/1/01)(Rev. 1/1/03).	
04-24 X	Revised by the Bureau of Materials and Physical Research to include all guidelines for Low ESAL superpave bituminous concrete mixtures.	
04-25	"Bituminous Concrete Surface Course" (Eff. 4/1/01).(Rev 4/1/03) Developed by the Bureau of Materials and Physical Research to allow total tonnage to be calculated. The requirement for skid-resistant aggregate in bituminous concrete surfaces mandates the use of aggregates with varying specific gravities. Surface course mixtures may weigh from 105 to 127 pounds per square yard per inch of thickness. The designer does not know what aggregate sources the contractor will select and therefore cannot accurately predict the total tonnage on the job.	101
04-26	Reserved	
04-27	"Shoulder Resurfacing" (Eff. 2/1/00)(Rev. 8/1/02). Developed by the Bureau of Design.....	
04-28	and Environment to minimize motorist costs and inconveniences.	
04-29	Reserved	
04-30 X	"Coarse Aggregate for Trench Backfill, Backfill, and Bedding" (Eff. 4/1/01)(Rev. 11/1/03).....	102-107
04-31	Developed by the Bureau of Construction to allow the use of coarse aggregate as bedding, backfill and trench backfill for pipe culverts and storm sewers. It also allows the use of controlled low strength material for backfilling the trenches at the Contractor's option and expense.	
04-32	Reserved	
04-33	Reserved	
04-34	Reserved	
04-35	"Expansion Joints" (Eff 8/1/03). Developed by the Bureau of Materials & Physical Research to require plastic expansion caps in lieu of metal pinch stops on the ends of dowel bars in expansion joints.	
04-36	Reserved	
04-37 X	"Curb Ramps for Sidewalk" (Eff 1/1/04) Developed by the Bureau of Design and Environment and the Bureau of Materials and Physical Research to comply with Americans with Disabilities Act, Accessibility Guidelines (ADAAG) for detectable warnings on curb ramps.	108-109
04-38	Reserved	

INDEX INTERIM SPECIAL PROVISIONS (CONT'D)

<u>ISP#</u>	<u>TITLE</u>	<u>PAGE</u>
04-32	Reserved.....	
04-33	Reserved.....	
04-34	"Corrugated Metal Pipe Culverts" (Eff. 8/1/03). Developed by the Bureau of Materials & Physical Research and the Illinois Highway Development Council to allow an alternate method of joining corrugated metal pipe.	
04-35	"Portland Cement Concrete Patching" (Eff. 1/1/01)(Rev. 1/1/04). Developed by..... the Bureau of Materials and Physical Research to provide additional rapid set patching mixtures, clarify the use of admixtures, and change the opening strength requirements.	
04-36	"Calcium Chloride Accelerator for Portland Cement Concrete Patching" (Eff. 1/1/01). Developed by the Bureau of Materials and Physical Research to allow the use of a calcium chloride accelerator for patching.	
04-37	"Asbestos Bearing Pad Removal" (Eff. 11/01/03). Developed by the Bureau of Design and Environment.	
04-38	"Precast, Prestressed Concrete Members" (Eff. 4/1/04). Developed by the Bureau..... of Bridges and Structures.	
04-39	"Asbestos Waterproofing Membrane or Asbestos Bituminous Concrete Surface Removal"..... (Eff. 6/1/89)(Rev. 6/30/94)	
04-40	"Precast Concrete" (Eff. 7/1/99)(Rev. 1/1/02). Developed by the Bureau of Materials..... and Physical Research to allow the use of slag/modified portland cement.	
04-41	Reserved.....	
04-42 X	"Adjusting Frames and Grates" (Eff. 8/1/01)(Rev. 11/1/01). Developed by the..... Bureau of Materials and Physical Research and the Illinois Highway Development Council to allow the use of plastic and structural steel adjusting rings.	110-111
04-43	"Driving Guardrail Posts" (Eff. 4/1/98). Developed by the Bureau of Design and Environment to give the Contractor the option to drive steel posts through bituminous shoulders when the foreslopes are 1:3 or flatter.	
04-44	"Remove and Re-Erect Steel Plate Beam Guardrail and Traffic Barrier Terminals" (Eff. 1/1/01)..... Developed by the Bureau of Design and Environment to require the replacement of steel block-outs with wood block-outs during the removal and re-erection of steel plate beam guardrail and traffic barrier terminals.	
04-45	"Impact Attenuators" (Eff. 11/1/03) Developed by the Bureau of Design and Environment to combine "Sand Module Impact Attenuators" and "Traffic Barrier Terminal Type 3, Special" into one specification. All of the these devices are now called Impact Attenuators and are categorized by their operational/ redirective properties. The revised approach is also reflected in BDE Procedure Memorandum 34-03, Impact Attenuators and the Department's Approved List of Impact Attenuators.	
04-46	"Impact Attenuators, Temporary" (Eff. 11/1/03) Developed by the Bureau of Design and Environment to combine "Sand Module Impact Attenuators" and "Traffic Barrier Terminal Type 3, Special" into one specification. All of these devices are now called Impact Attenuators and are categorized by their operational/redirective properties. This revised approach is also reflected in BDE Procedure Memorandum 34-03, Impact Attenuators and the Department's Approved List of Impact Attenuators.	
04-47 X	"Flagger Vests" (Eff. 4/1/03). Developed by the Bureau of Operations to bring department specifications for flagger vests into compliance with the American National Standards Institute specification ANSI/ISEA 107-1999 for high visibility safety apparel.	112
04-48	"Temporary Modular Glare Screen System" (Eff. 1/1/00). Developed by the Bureau of Operations.....	
04-49 X	"Railroad, Full-actuated Controller and Cabinet" (Eff. 4/1/04). Developed by the Bureau of Operations..... in cooperation with the Illinois Commerce Commission.	113-114
04-50	Reserved.....	
04-51 X	"Public Convenience and Safety" (Eff. 1/1/00). Developed by the Bureau of Design and Environment in an effort to minimize motorist costs and inconvenience.	115
04-52 X	"Transient Voltage Surge Suppression" (Eff. 8/1/03). Developed by the Bureau of Operations and the Bureau of Design and Environment to provide statewide requirements for transient voltage surge suppression of traffic signal controller cabinets.	116-117
04-53	"Epoxy Pavement Markings" (Eff. 1/1/01)(Rev. 8/1/03). Developed by the Bureau of Operations to revise the glass beads applied to epoxy pavement markings to improve reflectivity and durability of the pavement markings.	
04-54	"Accessible Pedestrian Signals (APS)" (Eff. 4/1/03). Developed by the Bureau of Operations and..... The Bureau of Design to provide statewide requirements for accessible pedestrian signals (APS).	

INDEX INTERIM SPECIAL PROVISIONS (CONT'D)

<u>ISP#</u>	<u>TITLE</u>	<u>PAGE</u>
04-55 X	"Epoxy Coatings for Steel Reinforcement" (Eff. 4/1/03). Developed by the Bureau of Materials and.....	118
	Physical Research to require all producer's of epoxy coated reinforcing steel to be certified by the Concrete Reinforcing Steel Institute's (CRSI) Epoxy Plant Certification Program.	
04-56	"Stone for Erosion Protection, Sediment Control and Rockfill" (Eff 1/1/04) Developed by the Bureau of Materials & Physical Research to update the quality and gradation requirements of stone used for erosion protection, sediment control, and rockfill.	
04-57 X	"Hand Vibrator" (Eff 11-1-03). Developed by the Bureau of Materials & Physical Research in response to a recommendation by the FHWA Substructure Quality Improvement Team to prevent damage to the epoxy coating on reinforcement bars.	119
04-58 X	"Working Days" (Eff. 1/1/02). Developed by the Bureau of Design and Environment to replace the working days paragraph deleted from BDE's proposal forms.	120
04-59	"Bituminous Base Course/ Widening Superpave" (Eff. 4/1/02) (Rev. 1/1/03). Developed by the Bureau of Materials and Physical Research to specify the design of superpave mixtures that are comparable to bituminous base course.	
04-60	"Stabilized Subbase and Bituminous Shoulders Superpave" (Eff. 4/1/02) (Rev. 1/1/03). Developed by the Bureau of Materials and Physical Research to specify the design of a superpave mixture that is comparable to a bituminous aggregate mixture (BAM). It also establishes a pay item for BITUMINOUS SHOULDER SUPERPAVE.	
04-61	"Organic Zinc-Rich Paint System" (Eff. 11/1/01) (Rev 8/1/03). Developed by the Bureau of Materials... and Physical Research in response to the recommendations of the 1999 FHWA/IDOT Bridge Coatings Process Review.	
04-62 X	"Light Emitting Diode (LED) Signal Head" (Eff. 4/1/02) (Rev 8/1/03). Developed by the Bureau of Operations to provide Statewide requirements for LED signal heads.	121-122
04-63	"Furnished Excavation" (Eff. 8/1/02) (Rev 8/1/03). Developed by the Bureau of Design & Environment to clarify the method of measurement for furnished excavation.	
04-64	"Surface Testing of Interstate Pavements" (Eff. 4/1/02) (Rev 8/1/03). Developed by the Bureau of Materials & Physical Research as part of the Illinois Smoothness Initiative (ISI).	
04-65 X	"Freeze-Thaw Rating" (Eff. 11/1/02). Developed by the Bureau of Materials & Physical Research to restrict D-cracking susceptible aggregate for pavement appurtenances.	123
04-66 X	"Traffic Structures" (Eff. 11/1/02). Developed by the Bureau of Bridges & Structures..... to comply with new AASHTO specifications.	124
04-67	"Sealing Abandoned Water Wells" (Eff. 11/1/02). Developed by the Bureau of Design and Environment....	
04-68 X	"Temporary Erosion Control" (Eff. 11/1/02). Developed by the Illinois Highway Development..... Council to add another material option for temporary ditch checks.	125
04-69	"Precast Block Revetment Mat" (Eff. 1/1/03). Developed by the Bureau of Materials & Physical Research and the Bureau of Design & Environment to provide material requirements for precast block revetment mat and disregard conflicting information in the Standard Specifications.	
04-70	"Articulated Block Revetment Mat" (Eff. 1/1/03). Developed by the Bureau of Materials..... & Physical Research and the Bureau of Design & Environment to provide material requirements for articulated block revetment mat and disregard conflicting information in the Standard Specifications.	
04-71	"Controlled Aggregate Mixing System" (Eff. 11/1/02). Developed by the Bureau of Materials & Physical Research.	
04-72	"Chair Supports" (Eff. 11/1/02) (Rev. 11/2/02). Developed by the Bureau of Materials & Physical Research to eliminate the use of plastic chair support for continuously reinforced pavements.	
04-73 X	"Epoxy Coating on Reinforcement" (Eff. 4/1/97) (Rev. 1/1/03). Developed to eliminate..... epoxy coatings on pavement reinforcement bars and thus reduce construction costs.	126
04-74	"Multilane Pavement Patching" (Eff. 11/1/02). Developed to address work stoppages and material shortages that have been occurring with pavement patching.	
04-75	"Bridge Deck Construction" (Eff. 4/1/02) (Rev. 1/1/04). Developed by the Bureau of Materials & Physical Research in response to the recommendations of the 1998 FHWA/IDOT Bridge Deck Construction Process Review.	
04-76	"Preformed Recycled Rubber Joint Filler" (Eff. 11/1/02). Developed by the Illinois Highway Development Council to add another material option for preformed expansion joint fillers.	
04-77	"Insertion Lining of Pipe Culverts" (Eff. 11/1/02). (Rev 8/1/03) Developed by the Bureau of... Materials & Physical Research as the result of discussions by the Implementation Sections of the Central Bureaus and Districts.	
04-78	"Underdrain Operations" (11/1/02). Developed to minimize motorists' inconvenience.....	

INDEX INTERIM SPECIAL PROVISIONS (CONT'D)

<u>ISP#</u>	<u>TITLE</u>	<u>PAGE</u>
04-79	"Shoulder Inlets with Curb" (Eff. 8/1/02). Developed by the Bureau of Design & Environment to include the portland cement concrete slab in the cost of the inlet box.	
04-80	"Traffic Barrier Terminals" (Eff. 1/1/03). Developed by the Bureau of Design & Environment to meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350.	
04-81	"Shoulder Rumble Strips" (Eff. 1/1/03). Developed by the Bureau of Design & Environment.....	
04-82	Rescinded.	
04-83 X	"Work Zone Traffic Control Devices" (Eff. 1/1/03) (Rev 4/2/04).	127
04-84 X	Fluorescent Orange Sheeting on Drums (Rev 1/1/03)	128
04-85 X	Vertical Barricades (Eff 11/1/02).	129
04-86	"Temporary Concrete Barrier" (Eff. 10/1/02) (Rev 11/1/03). Developed by the Bureau of Design & ... Environment to meet the National Highway Research Program (NCHRP) Report 350 requirements and to introduce the IDOT F shape barrier design.	
04-87	"Lime Gradation Requirements" (Eff. 11/1/02). Developed by the Bureau of Materials & Physical..... Research to revise the current lime gradation requirements.	
04-88 X	"Concrete Admixtures" (Eff. 1/1/03) (Rev 1/1/04). Developed by the Bureau of Materials & Physical research.	130-133
04-89 X	"Portland Cement Concrete" (Eff. 11/1/02). Developed by the Bureau of Materials & Physical..... Research and the PCC Technical Group.	134
04-90 X	"Curing and Protection of Concrete Construction" (Eff. 1/1/04). Developed to correct and clarify the curing/ protection requirements for concrete.	135-141
04-91	"Concrete Barrier" (Eff. 1/1/04). Developed by the Bureau of Design and Environment to redesign IDOT's permanent concrete barrier to the F shape.	
04-92	"Temporary Portable Bridge Traffic Signals" (Eff. 8/1/03). Developed by the Bureau of Operations to provide statewide requirements for temporary portable (i.e. trailer mounted) bridge traffic signals.	
04-93	"Raised Reflective Pavement Markers (Bridge) " (Eff. 8/1/03). Developed by the Bureau of Operations to provide statewide requirements for raised reflective pavement markers used on bridge decks.	
04-94 X	"Personal Protective Equipment " (Eff 7/1/04)	142
04-95a	"Work Zone Public Information Signs" (Eff 4/2/04) (Rev 4/15/04).....	
04-96a	"Work Zone Speed Limit Signs" (Eff 4/2/04 (Rev 4/15/04).....	
04-97	"Work Zone Traffic Control" (Eff 4/2/04)	
04-98a	"Steel Cost Adjustment" (Eff 4/2/04) (Rev 7/1/04).....	

STATE OF ILLINOIS
SPECIAL PROVISIONS

The following Special Provisions supplement the Illinois Department of Transportation "Standard Specifications for Road and Bridge Construction" adopted January 1, 2002, hereinafter referred to as the Standard Specifications, the latest edition of the "Illinois Manual on Uniform Traffic Control Devices for Streets and Highways" in effect on the date of invitation for bids, and the "Supplemental Specifications and Recurring Special Provisions" indicated on the Check Sheet included herein which apply to and govern the construction of FAU 2657 (Buffalo Grove Road) at Port Clinton Road/Prairie Road, in the Villages of Buffalo Grove and Vernon Hills in Lake County and in case of conflict with any part or parts of said specifications, the said Special Provision shall take precedence and shall govern. Any reference to the Department in the Standard Specifications or Special Provisions shall be interpreted to mean the Lake County Division of Transportation.

LOCATION OF PROJECT

This project begins at a point on the centerline of Buffalo Grove Road approximately 508.196 meters west of the center of Section 16, 43, 11 in Lake County and extends in a north westerly direction on a new curvilinear alignment for a distance of approximately 779.479 meters, ending on a point on the centerline of Prairie Road a distance of approximately 348.503 meters north of the center of Section 16.

DESCRIPTION OF PROJECT

This improvement is an intersection improvement, and the work to be performed consists of removing the existing pavement, and construction of a portland cement concrete pavement to the lines and grades shown on the plans. The work will consist of earth excavation, constructing an aggregate and a portland cement concrete pavement, constructing a median outlined with B-15.30 Curb and Gutter, constructing bituminous shoulders, planting trees in the raised medians, providing traffic signals for the intersection of Buffalo Grove Road and Port Clinton Road providing a highway lighting system, providing thermoplastic pavement markings, and all incidental and collateral work necessary to complete the improvement as shown on the plans, and as described herein.

It also consists of improving Port Clinton Road and Prairie Road by constructing a full depth bituminous pavement with bituminous shoulders.

STATUS OF UTILITIES TO BE ADJUSTED

UTILITY	POINT OF CONTACT/ ADDRESS	RELOCATE/ ADJUST	STATION AND OFFSET BY METERS
Commonwealth Edison	Ms. Terry Bleck Public Improvement Coordinator 1500 Franklin Blvd. Libertyville, Illinois 60048	RELOCATE: Power Poles on Buffalo Grove Road	103+018.478 - 6.765 RT
			103+033.238 - 6.846 RT
			103+136.096 - 6.578 RT
			103+493.637 - 0.397 RT
			103+552.920 - 8.242 LT
			103+590.427 - 7.983 LT
		RELOCATE: Power Poles on Port Clinton Road	50+089.141 - 3.600 LT 50+093.971 - 11.476 RT 50+105.105 - 8.428 LT
		ADJUST: Hand Hole at Port Clinton Road	50+088.851 - 3.928 LT 50+089.991 - 3.553 LT
North Shore Gas Company	Mr. Edward Lapinski Supervisory Engineer 3001 Grand Avenue Waukegan, Illinois 60085	ADJUST: Gas Valve at Port Clinton Road	50+012.341 - 12.287 LT 50+108.823 - 11.795 RT
			RELOCATE: 2" Gas Main 103+160 LT to 103+270 RT

The above information represents the best information available to the Department and is included for the convenience of the bidder. The applicable portions of Articles 105.07 and 107.31 of the Standard Specifications shall apply.

REMOVAL AND DISPOSAL OF UNSUITABLE MATERIALS

This work shall consist of the excavation of the black clay and black silty clay soils which are considered unsuitable material for placement within the top 450MM of the subgrade. This material may not be used in any embankment area and must be disposed of off the job limits.

The engineer shall have the final decision as to whether or not the material being excavated is to be classified as unsuitable.

This work will be paid for at the contract unit price per cubic meter for REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL.

SEEDING, CLASS 7

Seeding, Class 7 is to be used as an erosion control measure to establish temporary cover. Hand broadcasting of the seed or other methods approved by the Engineer will be allowed.

Seeding, Class 7 shall be applied to the topsoil areas as soon as the topsoil has been placed when the final seeding or sodding will not be done within one (1) week of the topsoil placement.

All work is to be done in accordance with Section 250 of the Standard Specifications.

SODDING, SALT TOLERANT

This work shall consist of preparing the ground surface, and furnishing and placing sod and other materials required in the sodding operations in accordance with Section 252 of the Standard Specifications and the details in the plans.

This work will be paid for at the contract unit price per square meter for SODDING, SALT TOLERANT.

PERMANENT SURVEY MARKER

The center of Section 16 is located within the existing intersection of Port Clinton Road and Prairie Road. A permanent survey marker is to be set at this location. This work will be done in accordance with Section 667 of the Standard Specification. This work will be paid for at the contract unit price each for PERMANENT SURVEY MARKERS which price shall include the new monument record being filed with the County.

PERMANENT DITCH CHECK

The PERMANENT DITCH CHECK shall be constructed out of earth embankment in accordance with the detail shown in the plans. The upstream side of the ditch check shall be protected using a heavy duty erosion control blanket meeting the requirements of Article 251.04 of the Standard Specifications.

This work shall be paid for at the contract unit price per each for PERMANENT DITCH CHECK which price shall include the erosion control blanket.

TRAFFIC BARRIER TERMINAL, TYPE 1, SPECIAL (TANGENT)

This work shall be done in accordance with the Special Provision for TRAFFIC BARRIER TERMINAL, TYPE 1, SPECIAL (TANGENT) (Check Sheet #40), and located as indicated in the plans.

POROUS GRANULAR EMBANKMENT, SUBGRADE

This work shall be done in accordance with Section 207 of the Standard Specifications, and as indicated in the plans.

This work will be paid for at the contract unit price per cubic meter for POROUS GRANULAR EMBANKMENT, SUBGRADE.

DRILL AND GROUT #20 TIE BARS

Work shall consist of drilling and grouting #20 tie bars into the existing pavement at the spacing shown in the plans in accordance with the plan details. The tie bars shall be epoxy mortared into the existing concrete.

This work shall be paid for at the contract unit price each for DRILL AND GROUT #20 TIE BARS, which price shall include all equipment and materials necessary to accomplish the work.

SAW CUTTING

This work shall consist of full depth longitudinal saw cutting between the Stations 102+913.915 to 102+996.000 at the west end of the Project and Station 013+664.503 to 103+693.394 at the north end of the Project.

This work will be paid for at the contract unit price per meter for SAW CUTTING.

AGGREGATE SUBGRADE, 450 MM

This work shall be done in accordance with the applicable portions of Section 207 of the Standard Specifications. The material shall conform with Article 1004.06 of the Standard Specifications, and as indicated in the plans.

This work shall be paid for at the contract unit price per square meter for AGGREGATE SUBGRADE, 450 MM.

CONSTRUCTION LAYOUT

In addition to the requirements of the Special Provision for Construction Layout Stakes (Illinois Department of Transportation Check Sheet #11), the Contractor shall reestablish, monument, and tie all control points used to complete the work as specified including all PI's, PC's, PT's, and POT's.

The type of monumentation used will be PK nails, iron pipes, RR spikes or as approved by the Engineer.

AGGREGATE FOR TEMPORARY ACCESS

Description. This work shall consist of furnishing, placing, salvaging, and maintaining aggregate for temporary roads and approaches as shown on the plans or as directed by the Engineer. The Engineer may require AGGREGATE FOR TEMPORARY ACCESS to be relocated for use at more than one location.

Materials. The material for this item shall be restricted to CA-1, CA-5, or CA-6.

Maintenance. The Contractor shall be required to maintain the AGGREGATE FOR TEMPORARY ACCESS to the satisfaction of the Engineer during the construction period.

Salvage. The Contractor shall, when required by the Engineer or the sequence of operations, salvage for reuse at the same or other locations within the limits of construction, previously placed AGGREGATE FOR TEMPORARY ACCESS.

Basis of Payment. This work will be paid for at the contract unit price per metric ton for AGGREGATE FOR TEMPORARY ACCESS. The contract unit price shall include all

equipment, labor and materials necessary to complete this work as specified and the cost of removing and disposing of the material used upon completion of the work.

BITUMINOUS CONCRETE PAVEMENT, SUPERPAVE

Description. This work shall consist of designing, producing and constructing Superpave bituminous concrete mixtures using Illinois Modified Strategic Highway Research Program (SHRP) Superpave criteria. This work shall be according to Sections 406 and 407 of the Standard Specifications except as follows.

Materials:

- (a) Fine Aggregate Blend Requirement. The Contractor may be required to provide FA 20 manufactured sand to meet the design requirements. For mixtures with $N_{design} \geq 90$, at least 50 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation.
- (b) Reclaimed Asphalt Pavement (RAP). If the Contractor is allowed to use more than 15 percent RAP, as specified in the plans, a softer performance-graded binder may be required as determined by the Engineer.

RAP shall meet the requirements of the special provision, "RAP for Use in Bituminous Concrete Mixtures".

RAP will not be permitted in mixtures containing polymer modifiers.

RAP containing steel slag will be permitted for use in top-lift surface mixtures only.

- (c) Bituminous Material. The asphalt cement (AC) shall be performance-graded (PG) or polymer modified performance-graded (SBS-PG or SBR-PG) meeting the requirements of Article 1009.05 of the Standard Specifications for the grade specified on the plans.

The following additional guidelines shall be used if a polymer modified asphalt is specified:

- a) The polymer modified asphalt cement shall be shipped, maintained, and stored at the mix plant according to the manufacturer's requirements. Polymer modified asphalt cement shall be placed in an empty tank and shall not be blended with other asphalt cements.

- b) The mixture shall be designed using a mixing temperature of $163 \pm 3^{\circ}\text{C}$ ($325 \pm 5^{\circ}\text{F}$) and a gyratory compaction temperature of $152 \pm 3^{\circ}\text{C}$ ($305 \pm 5^{\circ}\text{F}$).
- c) Pneumatic-tired rollers will not be allowed unless otherwise specified by the Engineer. A vibratory roller meeting the requirements of Article 406.16 of the Standard Specifications shall be required in the absence of the pneumatic-tired roller.
- d) A manufacturer's representative from the polymer asphalt cement producer shall be present during each polymer mixture start-up and shall be available at all times during production and lay-down of the mix.

Laboratory Equipment:

- (a) Superpave Gyratory Compactor. The superpave gyratory compactor (SGC) shall be used for all testing.
- (b) Ignition Oven. The ignition oven shall be used to determine the AC content. The ignition oven shall also be used to recover aggregates for all required washed gradations.

The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

Mixture Design. The Contractor shall submit mix designs, for approval, for each required mixture. Mix designs shall be developed by Level III personnel who have successfully completed all of the Hot Mix Asphalt Courses, Level I, II, and III under the Superpave system. If Level I and/or Level III were taken under the Marshall system, the additional courses "Superpave Field Control" and/or "Superpave Mix Design Upgrade" would be required. Articles 406.10 and 406.13 of the Standard Specifications shall not apply. The mixtures shall be designed according to the respective Illinois Modified AASHTO references listed below.

AASHTO MP 2	Standard Specification for Superpave Volumetric Mix Design
AASHTO PP 2	Standard Practice for Short and Long Term Aging of Hot Mix Asphalt (HMA)
AASHTO PP 19	Standard Practice for Volumetric Analysis of Compacted Hot Mix Asphalt (HMA)

- AASHTO PP 28 Standard Practice for Designing Superpave HMA
- AASHTO T 209 Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
- AASHTO T 312 Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the Superpave Gyratory Compactor
- AASHTO T 308 Determining the Asphalt Content of Hot Mix Asphalt (HMA) by the Ignition Method

- (a) Mixture Composition: The ingredients of the bituminous mixture shall be combined in such proportions as to produce a mixture conforming to the composition limits by weight.

The gradation mixture specified on the plans shall produce a mixture falling within the limits specified in Table 1.

TABLE 1. MIXTURE COMPOSITION (% PASSING) ^{1/}								
Sieve Size	IL-25.0 mm		IL-19.0 mm		IL-12.5mm ^{4/}		IL-9.5 mm ^{4/}	
	min	max	min	max	min	max	min	max
37.5 mm (1-1/2 in.)		100						
25 mm (1 in.)	90	100		100				
19 mm (3/4 in.)		90	82	100		100		
12.5 mm (1/2 in.)	45	75	50	85	90	100		100
9.5 mm (3/8 in.)						90	90	100
4.75 mm (#4)	24	42 ^{2/}	24	50 ^{2/}	24	65	24	65
2.36 mm (#8)	16	31	16	36	16	48 ^{3/}	16	48 ^{3/}
1.18 mm (#16)	10	22	10	25	10	32	10	32

TABLE 1. MIXTURE COMPOSITION (% PASSING) ^{1/}								
Sieve Size	IL-25.0 mm		IL-19.0 mm		IL-12.5mm ^{4/}		IL-9.5 mm ^{4/}	
	min	max	min	max	min	max	min	max
600 µm (#30)								
300 µm (#50)	4	12	4	12	4	15	4	15
150 µm (#100)	3	9	3	9	3	10	3	10
75 µm (#200)	3	6	3	6	4	6	4	6

- 1/ Based on percent of total aggregate weight.
- 2/ The mixture composition shall not exceed 40 percent passing the 4.75 mm (#4) sieve for binder courses with Ndesign ≥ 90.
- 3/ The mixture composition shall not exceed 40 percent passing the 2.36 mm (#8) sieve for surface courses with Ndesign ≥ 90.
- 4/ The mixture composition for surface courses shall be according to IL-12.5 mm or IL-9.5 mm, unless otherwise specified by the Engineer.

One of the above gradations shall be used for leveling binder as specified in the plans and according to Article 406.04 of the Standard Specifications.

It is recommended that the selected combined aggregate gradation not pass through the restricted zones specified in Illinois Modified AASHTO MP 2.

- (b) Dust/AC Ratio for Superpave. The ratio of material passing the 75 µm (#200) sieve to total asphalt cement shall not exceed 1.0 for mixture design (based on total weight of mixture).
- (c) Volumetric Requirements. The target value for the air voids of the hot mix asphalt (HMA) shall be 4.0 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix and shall conform to the requirements listed in Table 2.

TABLE 2. VOLUMETRIC REQUIREMENTS					
	Voids in the Mineral Aggregate (VMA), % minimum				Voids Filled with Asphalt (VFA), %
Ndesign	IL-25.0	IL-19.0	IL-12.5	IL-9.5	
50	12.0	13.0	14.0	15.0	65-78
70					65-75
90					
105					

- (d) **Determination of Need for Anti-Stripping Additive.** The mixture designer shall determine if an additive is needed in the mix to prevent stripping. The determination will be made on the basis of tests performed according to Illinois Modified T 283 using 4 in. Marshall bricks. To be considered acceptable by the Department as a mixture not susceptible to stripping, the ratio of conditioned to unconditioned split tensile strengths (TSRs) shall be equal to or greater than 0.75. Mixtures, either with or without an additive, with TSRs less than 0.75 will be considered unacceptable.

If it is determined that an additive is required, the additive may be hydrated lime, slaked quicklime, or a liquid additive, at the Contractor's option. The liquid additive shall be selected from the Department's list of approved additives and may be limited to those which have exhibited satisfactory performance in similar mixes.

Dry hydrated lime shall be added at a rate of 1.0 to 1.5 percent by weight of total dry aggregate. Slurry shall be added in such quantity as to provide the required amount of hydrated lime solids by weight of total dry aggregate. The exact rate of application for all anti-stripping additives will be determined by the Department. The method of application shall be according to Article 406.12 of the Standard Specifications.

Personnel. The Level II Technician shall have successfully completed the Department's Hot Mix Asphalt Courses, Level I and II under the Superpave system. If Level I was taken under the Marshall system the additional course "Superpave Field Control" would be required.

Required Plant Tests. Testing shall be conducted to control the production of the bituminous mixture at the frequency required by the current version of the "Project Procedure Guide".

During production, the ratio of minus 75 μm (#200) sieve material to total asphalt cement shall be not less than 0.6 nor more than 1.2 and the moisture content of the mixture at discharge from the mixer shall not exceed 0.5 percent. If at any time the ratio of minus 75 μm (#200) material to asphalt or moisture content of the mixture falls outside the stated limits, production of the mix shall cease. The cause shall be determined and corrective action satisfactory to the Engineer shall be initiated prior to resuming production.

During production, mixtures containing an anti-stripping additive will be tested by the Department for stripping according to Illinois Modified T 283. If the mixture fails to meet the TSR criteria for acceptance, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria.

Construction Requirements:

Lift Thickness:

- (a) Binder and Surface Courses. The minimum compacted lift thickness for constructing bituminous concrete binder and surface courses shall be according to Table 4:

TABLE 4. MINIMUM COMPACTED LIFT THICKNESS	
Mixture	Thickness, mm (in.)
IL-9.5	38 (1-1/2)
IL-12.5	38 (1-1/2)
IL-19.0	57 (2-1/4)
IL-25.0	76 (3)

- (b) Leveling Binder. Mixtures used for leveling binder shall be as follows:

TABLE 5. LEVELING BINDER	
Nominal, Compacted, Leveling Binder Thickness, mm (in.)	Mixture
≤ 32 (1-1/4)	IL-9.5
32 (1-1/4) to 50 (2)	IL-9.5 or IL-12.5

Density requirements shall apply for leveling binder when the nominal, compacted thickness is 38 mm (1-1/2 in.) or greater for IL-9.5 mixtures and 38 mm (1-1/2 in.) or greater for IL-12.5 mixtures.

- (c) Full-Depth Pavement. The compacted thickness of the initial lift of binder course shall be 100 mm (4 in.). The compacted thickness of succeeding lifts shall meet the minimums specified in Table 4 but not exceed 100 mm (4 in.).

If a vibratory roller is used for breakdown, the compacted thickness of the binder lifts, excluding the top lift, may be increased to 150 mm (6 in.) provided the required density is obtained.

- (d) Bituminous Patching. The minimum compacted lift thickness for constructing bituminous patches shall be according to Table 4.

Density Control Limits:

Density shall be within the following control limits:

TABLE 6. DENSITY CONTROL LIMITS	
Parameter	Individual Test
Ndesign \geq 90	92.0-96.0%
Ndesign < 90	93-97%

Basis of Payment. On resurfacing projects, this work will be paid for at the contract unit price per metric ton (ton) for BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On resurfacing projects in which polymer modifiers are required, this work will be paid for at the contract unit price per metric ton (ton) for POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

CURB RAMPS FOR SIDEWALKS

Effective: January 1, 2004

Description: This work shall consist of constructing sidewalk curb ramps with detectable warnings in compliance with the Americans with Disabilities Act, Accessibility Guidelines (ADAAG). Work shall be according to Section 424 of the Standard Specifications except as modified herein.

The detectable warnings shall consist of an area of truncated domes that provide both visual and tactile cues to pedestrians who are about to enter into traffic. The warning area shall begin 150 mm (6 in.) from the back of the curb and continue 600 mm (2 ft) in the direction of pedestrian travel for the entire width of the walking surface.

The detectable warnings shall also present a contrast in color from the adjacent sidewalk. This shall be accomplished by constructing the warning area, plus the 150 mm (6 in.) area between the warning area and the back of curb, out of concrete that is integrally colored red. However if the sidewalk is brick or of some dark color, the contrast requirement shall be achieved with normal (grey), Class SI concrete.

Materials: Materials for the detectable warning area of the curb ramps shall meet the following requirements.

- (a) Integrally Colored Concrete. Integrally colored concrete shall be according to Section 1020 of the Standard Specification for Class SI concrete except as follows.

- | | |
|--------------------|--|
| Article 1020.04 | The allowable water/cement ratio range shall be 0.40 minimum to 0.44 maximum. |
| Article 1020.04 | The allowable slump range shall be 75 mm (3 in.) minimum to 125 mm (5 in.) maximum. |
| Article 1020.04 | The allowable coarse aggregate gradations shall be CA 11, CA 13, CA 14, and CA 16. |
| Article 1020.05(b) | A calcium chloride accelerating admixture shall not be used. |
| Article 1020.05(b) | The cement factor shall not be reduced if a water-reducing or high range water-reducing admixture is used. |
| Article 1020.05© | Fly ash shall not be used. |
| Article 1020.05(k) | Ground granulated blast-furnace slag shall not be used. |

- Article 1020.11 Pigment for integrally colored concrete shall be added to the concrete and mixed per the Manufacturer's recommendation.
- Article 1020.13 The curing method shall be Type I membrane curing.
- Article 1020.13 The protection method shall be according to Article 1020.13(e)(1) and the protection period shall be 96 hours. No material, including the insulating material, shall be placed in direct contact with the concrete surface.
- (b) Pigment for Integrally Colored Concrete. The pigment shall meet the requirements of ASTM C 979, match color number 30166 of Federal Standard 595, and be on the Department's Approved List of Pigments for Integrally Colored Concrete.
- (c) Release Agent for Concrete Stamping Tools. The release agent shall be according to the stamping tool manufacturer's recommendations and the following: it shall be a clear liquid that will evaporate, it shall not harm the concrete, and it shall allow the application of Type I membrane curing.
- Equipment: Equipment for the detectable warning area of the curb ramps shall meet the following requirements.
- (a) Concrete Stamps. Sufficient numbers and sizes of stamps shall be furnished to cover the various widths of the curb ramps. The stamps shall have an air opening at the top of each truncated dome recess, and shall be rigid enough to evenly distribute the force exerted during tamping.
- (b) Tamper. The tamper shall be according to the concrete stamp manufacturer's recommendations.

CONSTRUCTION REQUIREMENTS

Stamping: The concrete shall be placed and finished according to Article 424.06 except the area to be stamped shall not be brushed. When the bleed water has been absorbed, stamping shall begin. The entire width of the curb ramp shall be stamped at the same time. A single stamp or a combination of stamps may be used.

Prior to placing the stamp on the concrete, the stamp shall be coated with the release agent. When recommended by the manufacturer, the release agent shall also be applied to the concrete surface. Once the stamp has been placed on the ramp, it shall remain down until the stamping is complete.

The entire area of the stamp shall be tamped with a short, slow, repetitive action such that the concrete is caused to move up and into the dome recesses of the stamp. Tamping shall continue until mortar has come through the air openings in the stamp. Stepping or walking on the stamp will not be allowed. The base elevation of the domes shall be even with the adjacent sidewalk surface; the stamp shall not be forced down into the concrete.

When stamping is complete, the stamp shall be removed and the concrete cured.

Upon completion of curing, or after cold weather protection if required, the protruding mortar tip on the top of each dome shall be removed and the dome rubbed or ground smooth.

Basis of Payment. This work shall not be paid for separately, but shall be considered part of PORTLAND CEMENT CONCRETE SIDEWALK 125MM.

DUCTILE IRON PIPE, STORM SEWER, 300MM

This work shall consist of constructing a storm sewer of ductile iron pipe of water main quality at the locations shown in the plans where the storm sewer crosses the existing water main. The pipe shall conform to ANSI A 21.51 (AWWA C-151).

The pipe length shall be centered on the water main so there will be no joint at the water main.

This work will be paid for at the contract unit price per meter for DUCTILE IRON PIPE, STORM SEWER, 300MM. The joint between the iron pipe and the remainder of the storm sewer will not be paid for separately, but shall be considered as part of this item of work.

LAKE COUNTY DIVISION OF TRANSPORTATION

TRAFFIC SIGNAL SPECIFICATIONS

Effective: September 5, 2003

All work and equipment performed and installed under this Contract:

County Highway Name: FAU2657 Buffalo Grove Road at Port Clinton
Road/Prairie Road
County Highway Number: _____
County Highway Section: 93-00081-04-CH

shall be governed by and shall comply with:

SPECIFICATION	ADOPTED/DATED
The State of Illinois "Standard Specifications for Road and Bridge Construction" referred to as "Standard Specifications"	Latest Edition
The State of Illinois "Manual on Uniform Traffic Control Devices for Streets and Highways," referred to as "MUTCD"	Latest Edition
The National Electrical Code referred to as "NEC"	Latest Edition
The National Electrical Manufacturers Association (All publications for traffic control items) referred to as "NEMA"	Latest Edition
The International Municipal Signal Association ("Official Wire & Cable Specifications Manual,") referred to as "IMSA"	Latest Edition
The Institute of Transportation Engineers Technical Report No. 1, (A Standard for Adjustable Face Vehicular Traffic Control Heads) referred to as "ITE"	Latest Edition

SPECIFICATION	ADOPTED/DATED
AASHTO "Standard Specifications" Structural Supports for Highway Signs, Luminaires, and Traffic Signals	Latest Edition
Supplemental Specifications and Recurring Special Provisions	Latest Edition

The following Traffic Signal Special Provisions supplement the above specifications, manuals, and codes. In case of conflict with any part or parts of said documents, these Special Provisions shall take precedence and shall govern.

The following terms and acronyms are used:

IDOT	Illinois Department of Transportation
District 1	IDOT District 1
LCDOT	The Lake County Division of Transportation
Engineer	The Resident Engineer
Traffic Engineer	The County Traffic Engineer – LCDOT

The construction, installation, modification and/or removal work shall be accomplished at the following intersection(s):

BUFFALO GROVE ROAD AND PORT CLINTON ROAD

The intent of this Special Provision is to prescribe the materials and construction methods commonly used in traffic signal installations. All material furnished shall be new. The locations and the details of all installations shall be indicated on the plans or as directed by the Engineer.

The work performed under this contract shall consist of furnishing and installing all traffic signal work as specified on the plans and as specified herein in a manner acceptable and approved by the Engineer.

MAST ARM SIGN PANELS

Add the following to Article 720.02 of the Standard Specifications:

Signs attached to poles or posts (such as mast arm signs) shall have mounting brackets and sign channels which are equal to and completely interchangeable with those used by LCDOT. All aluminum signs shall have a white reflectorized legend and border on a green reflectorized background, type AZ sheeting. The sign face shall not have any holes. 3M Scotch Joining Systems bonding tape or an approved equal shall be used in

place of screws or rivets. The Signfix Aluminum Channel Framing System is currently recommended, but other brands of mounting hardware, or bonding tape are acceptable based upon LCDOT approval.

INSPECTION OF ELECTRICAL SYSTEMS

Add the following to Article 802.01 of the Standard Specifications:

All cabinets, including temporary traffic signal cabinets, shall be assembled by an approved equipment supplier in District One. LCDOT reserves the right to request that any controller and cabinet be tested at a District 1 approved equipment supplier's facility prior to field installation. Such testing will be at no extra cost to the contract. All permanent or temporary "railroad interconnected" controllers and cabinets, shall be newly constructed, built, tested and approved by the controller equipment vendor, in the vendor's District 1 approved facility, prior to field installation. The vendor shall provide the technical equipment and assistance as required by the Engineer to fully test this equipment.

DAMAGE TO TRAFFIC SIGNAL SYSTEM

Revise Article 802.02 of the Standard Specifications to read:

Any damaged equipment or equipment not operating properly from any cause whatsoever shall be repaired and/or replaced with new equipment provided by the Contractor at no additional cost to the Contract and/or owner of the traffic signal system, to the satisfaction of the Engineer. Final repairs or replacement of damaged equipment must meet the approval of the Engineer prior to or at the time of final inspection, otherwise the traffic signal installation will not be accepted. Cable splices outside the controller cabinet shall not be allowed.

RESTORATION OF WORK AREA

Add to Section 802 of the Standard Specifications:

Restoration of the traffic signal work area shall be incidental to the related pay item such as foundation, conduit, handhole, trench and backfill, etc. and no extra compensation shall be allowed. All roadway surfaces such as shoulders, medians, sidewalks, pavement, etc. shall be restored to match the previously existing conditions. All damage to mowed lawns shall be replaced with an approved sod, and all damage to unmowed fields shall be seeded, in accordance with Section 250 and 252 of the "Standard Specifications" respectively.

SUBMITTALS

Revise Article 802.04 of the Standard Specifications to read:

The Contractor shall provide:

- a. All material approval requests shall be submitted a minimum of seven (7) days prior to the delivery of equipment to the job site, or within thirty (30) calendar days after the contract is awarded, or within fifteen (15) calendar days after the preconstruction meeting, whichever is earliest.
- b. Seven (7) copies of a letter listing the manufacturer's name and the model numbers of the proposed equipment. The Traffic Engineer will review the letter and determine whether the proposed equipment is approved for use. The copies will be stamped as "approved", "not approved", or "approved as corrected" and returned to the Contractor.
- c. Two (2) copies of material catalog cuts.
- d. Seven (7) copies of mast arm poles and assemblies drawings.
- e. The contract number or permit number, project location/limits and corresponding pay item number must be on each sheet of the letter, material catalog cuts and mast arm poles and assemblies drawings as required in items b, c and d.
- f. Exceptions, Deviations and Substitutions. In general, exceptions to and deviations from the requirements of the Contract Documents will not be allowed. It is the Contractor's responsibility to note any deviations from Contract requirements at the time of submittal and to make any requests for deviations in writing to the Engineer. In general, substitutions will not be acceptable. Requests for substitutions must demonstrate that the proposed substitution is superior to the material or equipment required by the Contract Documents. No exceptions, deviations or substitutions will be permitted without the approval of the Engineer.

MAINTENANCE AND RESPONSIBILITY

Revise Article 802.07 of the Standard Specifications to read:

- a) Existing traffic signal installations and/or any electrical facilities at locations included in this contract may be altered or reconstructed totally or partially as part

of the work on this contract. The Contractor is hereby advised that all traffic control equipment presently installed at these locations may be the property of the State of Illinois, Department of Transportation, Division of Highways, County, Private Developer, or the Municipality in which it is located. Once the Contractor has begun any work on any portion of the project, all traffic signals within the limits of this contract or those which have the pay item MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION, TEMPORARY TRAFFIC SIGNAL INSTALLATION, and/or MAINTENANCE OF EXISTING FLASHING BEACON INSTALLATION, shall become the full responsibility of the Contractor. The Contractor shall supply the Engineer and the County's Traffic Signal Maintenance Contractor a 24-hour emergency contact name and telephone number. The Contractor shall provide sufficient qualified personnel to respond to all notifications of malfunctions on a round-the-clock basis (24 hours a day, 7 days a week). The Contractor is required to keep a time and date log of each response, from the time of the initial report to the time of final permanent repair.

- b) When the project has a pay item for MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION, TEMPORARY TRAFFIC SIGNAL INSTALLATION, and/or MAINTENANCE OF EXISTING FLASHING BEACON INSTALLATION, the Contractor must notify the Traffic Engineer at (847) 362-3950 of their intent to begin any physical construction work on the project or any portion thereof. This notification must be a minimum of seven (7) working days prior to the start of construction to allow sufficient time for an inspection of the existing traffic signal installation(s) and the transfer of maintenance to the Contractor. If work is started prior to the inspection, maintenance of the traffic signal installation(s) will be immediately transferred to the Contractor without an inspection. The Contractor shall then become responsible for repairing or replacing all equipment that is not operating properly or is damaged at no cost to the owner of the traffic signal. Final repairs to or the replacement of damaged equipment must meet the approval of the Engineer at the time of final inspection or the traffic signal installation will not be accepted.
- c) Contracts that don't include traffic signal installations or modifications, but do include pay items for milling or pavement patching which may result in the destruction of traffic signal loops, do not require maintenance transfer. These contracts do require a notification of intent to work and an inspection. A minimum of seven (7) working days prior to the loop removal, the Contractor shall notify the Traffic Engineer at (847) 362-3950, at which time arrangements will be made to adjust the traffic controller timing to compensate for the absence of detection.
- d) The Contractor is advised that the existing and/or temporary traffic signal installation must remain in operation during all construction stages, except for the most unavoidable down time. Any plan to shutdown the traffic signal installation

for a period exceeding fifteen (15) minutes must receive prior approval from the Engineer. Approval to shutdown the traffic signal installation will only be granted during the hours of 9:00 A.M. to 3:00 P.M. on weekdays. Shutdowns will not be allowed during inclement weather, weekends or holiday periods.

- e) The Contractor shall be fully responsible for the safe and efficient operation of the traffic signals. Any inquiry, complaint or request by the Division, the County's Traffic Signal Maintenance Contractor or the public, shall be investigated and repairs started within one hour. Failure to provide this service will result in liquidated damages of \$500 per day per occurrence. In addition, the Contractor shall restore service and complete permanent repairs in accordance with the following Repair Timetable. The Traffic Engineer reserves the right to assign any work not completed within this timeframe to the County's Traffic Signal Maintenance Contractor. All costs associated to repair this uncompleted work shall be the responsibility of the Contractor. Failure to pay these costs to the Traffic Signal Maintenance Contractor within one month after the incident will result in additional liquidated damages of \$500 per month per occurrence. Unpaid bills will be deducted from the cost of the Contract. The County's Traffic Signal Maintenance Contractor may inspect any signaling device on the Division's highway system at any time without notification.

Unless specifically stated to the contrary, all items shall be repaired within the time frame described in the Repair Timetable. The times listed are noncumulative. Any repairs not specifically covered in the Repair Timetable, or described elsewhere, shall be completed within a time frame matching the most similar line item in the Repair Timetable.

REPAIR TIMETABLE (non cumulative)			
ITEM	RESPONSE TIME	SERVICE RESTORATION	PERMANENT REPAIRS
KNOCKDOWNS/FAILURE/DAMAGE:			
Cabinet	1 hr	24hrs	2 wks
Controller (Master)	1 hr	NWD	2 wks
Controller (Local)	1 hr	24hrs	2 wks
Detector Loop	1 hr	n.a.	30 days
Detector Loop (Priority)	1 hr	n.a.	10 days
Loop Detector/Amplifier	1 hr	4 hrs	2 wks
MVP Sensor	1 hr	4 hrs	2 wks

REPAIR TIMETABLE (non cumulative)			
ITEM	RESPONSE TIME	SERVICE RESTORATION	PERMANENT REPAIRS
PTZ Camera	2 hrs	48 hrs	2 wks
Detector Interface Card/Mini Hub	1 hr	4 hrs	2 wks
Modem	1 hr	NWD	2 wks
Load Switch	1 hr	2 hrs	2 hrs
Signal Head/Lenses	1 hr	2 hrs	NWD
Pole/Mast Arm	1 hr	2 hrs	ENG
Cabling/Conduit	1 hr	4 hrs	ENG
Interconnect	1 hr	NWD	ENG
Graffiti/Advertising	NWD	NWD	NWD
Telemetry, Electrical	1 hr	2 hrs	NWD
Indicators/switches/LEDs/displays	NWD	n.a.	2 wks
Outages not covered elsewhere	1 hr	2 hrs	NWD
Filter/Cleanliness/fans/thermostat	NWD	NWD	n.a.
Misalignment (conflicting)	1 hr	2 hrs	NWD
Misalignment (non-conflicting)	48hrs	48hrs	1 wk
COMPLAINTS/CALLS/ALARMS:			
Timing/Phasing/Programming	1 hr	2 hrs	ENG
Coordination Alarm/Cycle Fail	NWD	ENG	ENG
Controller Alarm/Status Change	1 hr	NWD	1 wk
Detector Alarm/Status change	NWD	NWD	ENG
CMU Flash/Local Flash	1 hr	2 hrs	1 wk
Door Open/Maint. Req.	1 hr	2 hrs	NWD

LEGEND:	hr = hour	ENG = acceptable to Engineer
	hrs = hours	days = calendar days
	NWD = next working day	n.a. = not applicable
	wk = week	
	wks = weeks	

TRAFFIC SIGNAL INSPECTION (TURN-ON)

Revise Article 802.10 of the Standard Specifications to read:

It is LCDOT's intent to have all electric work completed and the equipment field-tested by the vendor, prior to LCDOT's "turn-on" field inspection. The Contractor must have all traffic signal work completed and the electrical service installation connected by the utility company prior to requesting an inspection and "turn-on" of the traffic signal installation. In the event the Traffic Engineer determines that the work is not complete and that the inspection will require more than two (2) hours to complete, the inspection shall be canceled and the Contractor will be required to reschedule at another date.

The Contractor may request a "turn-on" and inspection of the completed traffic signal installation at each separate location. This request must be made to the Traffic Engineer at **(847) 362-3950** a minimum of seven (7) working days prior to the time of the requested inspection. LCDOT will not grant a field inspection until the Contractor provides notification that the equipment has been field tested, and the intersection is operating according to contract requirements. The LCDOT facsimile number is **(847) 362-5290**.

Signal indications being tested shall match the lane configurations and markings at the intersection. If any conflicting signal indications are visible to motorist or pedestrians while testing, the Contractor shall be responsible to provide police officer(s) to direct traffic. In addition, the Contractor shall provide a representative from the control equipment vendor's office to attend the traffic signal inspection for both permanent and temporary traffic signal "turn-ons".

Upon demonstration that the signals are operating properly and that all work has been completed in accordance with the contract and to the satisfaction of the Traffic Engineer, the Traffic Engineer will then allow the signals to be placed in continuous operation. The Agency that is responsible for the maintenance of each traffic signal installation will reassume the traffic signal maintenance upon successful completion of this inspection.

The Lake County Division of Transportation requires the following from the Contractor at Traffic Signal "turn-ons":

1. One (1) set of signal plans of record.
2. Notification from the Contractor and the equipment vendor that the equipment was satisfactorily field-tested.
3. A knowledgeable representative of the controller equipment supplier shall be present at the traffic signal "turn-on". The representative shall be knowledgeable concerning the cabinet design and the controller functions.
4. A copy of the approved material letter.
5. One (1) copy of the operation and service manuals for the signal controller and the associated control equipment.
6. Five (5) copies (11" x 17") of the cabinet wiring diagrams.
7. Five (5) copies of the traffic signal installation cable log.

Acceptance of the traffic signal equipment by LCDOT shall be based on the inspection results at the traffic signal "turn-on". If approved, the traffic signal acceptance shall be given verbally at the "turn-on" inspection, followed by written correspondence from the Traffic Engineer. The Contractor shall be responsible for all traffic signal equipment and associated maintenance thereof until LCDOT acceptance is granted. Any "punch list" work remaining after the installation is accepted shall be completed within thirty (30) calendar days of the acceptance date. If this work is not completed within thirty days, LCDOT reserves the right to have the work completed by others at the Contractor's expense. This cost will be in addition to Liquidated Damages for Untimely Work.

The Contractor shall furnish all equipment and/or parts to keep the traffic signal installation operating.

All cost of work and materials required to comply with the above requirements shall be included in the pay item bid prices, under which the subject materials and signal equipment are paid, and no additional compensation will be allowed. Materials and signal equipment not complying with the above requirements will be subject to removal and disposal at the Contractor's expense.

LIQUIDATED DAMAGES FOR UNTIMELY WORK

A primary concern of LCDOT is to maintain a safe and efficient roadway for the public. Therefore, the Contractor shall proceed with the traffic signal work as soon as conditions and project staging permit. If in the opinion of the Engineer construction conditions are suitable for traffic signal work, and the Contractor has not yet begun the traffic signal work, the Engineer shall notify the Contractor to proceed. The Contractor shall begin the traffic signal work within seven (7) calendar days after notification to proceed. The Contractor shall continue to prosecute the traffic signal work until completion, or until he can no longer proceed due to conditions beyond his control. The Contractor shall notify the Engineer of any conditions impeding and/or delaying his prosecution of the work. Failure by the Contractor to proceed with the traffic signal work as specified herein shall result in liquidated damages of \$500.00 per calendar day per occurrence.

LOCATION UNDERGROUND FACILITIES

Revise Section 803 of the Standard Specifications to read:

Contractor requests for equipment locates will be granted only once prior to the start of the contract. Additional requests shall be at the expense of the Contractor. The location of underground traffic facilities does not relieve the Contractor of their responsibility to repair any item(s) damaged during the construction, at his/her own expense.

Locate requests should be directed to LCDOT's Traffic Signal Maintenance Contractor or to the LCDOT Traffic Engineering Department at (847) 362-3950.

The exact location of all utilities shall be field verified by the Contractor before the installation of any components of the traffic signal system. For locations of utilities call J.U.L.I.E. at 1-800-892-0123. For the locations of some utilities, other Agencies or Municipalities may need to be contacted

ELECTRIC SERVICE INSTALLATION

Revise Section 805 of the Standard Specifications to read:

Description. This work shall consist of all materials and labor required to install, modify, or extend the electric service installation. All installations shall meet the requirements of the details in the "District 1 Standard Traffic Signal Design Details" and applicable portions of the Specifications.

Materials.

- a. General. The completed control panel shall be constructed in accordance with UL Std. 508, Industrial Control Panel, and carry the UL label. Wire terminations shall be UL listed.
- b. Enclosures. All electrical service enclosures shall be UL 50, single door design, fabricated from Type 5052 H-32 aluminum. All seams shall be continuous welded and ground smooth, and the cabinet shall be sized to adequately house all required components with extra space for arrangement and termination of wiring. Enclosures shall meet the following additional requirements:
 - 1. Pole Mounted Cabinet. The cabinet shall be NEMA Type 4X. Stainless steel screws and clamps shall secure the cover and assure a watertight seal. The cover shall be removable by pulling the continuous stainless steel hinge pin. The cabinet shall have an oil-resistant gasket and a lock kit shall be provided with an internal O-ring in the locking mechanism assuring a watertight and dust-tight seal. A minimum size of 14-inches high, 9-inches wide and 8-inches deep is required. The cabinet shall be channel mounted to a wooden utility pole using assemblies recommended by the manufacturer.
 - 2. Ground Mounted Cabinet. The cabinet shall be NEMA Type 3R with back panel. The cabinet frame and door shall be 0.125-inch thick, the top 0.250-inch thick, and the bottom 0.500-inch thick. The door and door opening shall be double flanged. The door shall be approximately 80% of the front surface, with a full-length tamperproof stainless steel .075-inch thick hinge bolted to the cabinet with stainless steel carriage bolts and nylock nuts. The locking mechanism shall be slam-latch type with a keyhole cover. A minimum size of 40-inches high, 16-inches wide, and 15-inches deep is required. The cabinet shall be mounted upon a square Type A concrete foundation as indicated on the plans. The foundation is paid for separately.
- c. Surge Protector. Overvoltage protection, with LED indicator, shall be provided for the 120-volt load circuit by the means MOV and thermal fusing technology. The response time shall be <5n seconds and operate within a range of -40C to +85C. The surge protector shall be UL 1449 Listed.

- d. **Circuit Breakers.** Circuit breakers shall be standard UL listed molded case, thermal-magnetic bolt-on type, with trip-free indicating handles. 120-volt circuit breakers shall have an interrupting rating of not less than 65,000 rms symmetrical amperes. Unless otherwise indicated, the main disconnect circuit breaker for the traffic signal controller shall be rated 60 amperes, 120 V and the auxiliary circuit breakers shall be rated 10 amperes, 120 V.
- e. **Fuses, Fuseholders and Power Indicating Light.** Fuses shall be small-dimensional cylindrical fuses of the dual element time-delay type. The fuses shall be rated for 600 V AC and shall have a UL listed interrupting rating of not less than 10,000 rms symmetrical amperes at rated voltage. The power indicating light shall be LED type with a green colored lens and shall be energized when electric utility power is present.
- f. **Ground and Neutral Bus Bars.** A single copper ground and neutral bus bar, mounted on the equipment panel shall be provided. Ground and neutral conductors shall be separated on the bus bar. Compression lugs, plus 2 spare lugs, shall be sized to accommodate the cables with the heads of the connector screws painted green for ground connections and white for neutral connections.
- g. **Utility Services Connection.** The Contractor shall notify the Utility Company marketing representative a minimum of 30 working days prior to the anticipated date of hook-up. This 30-day advance notification will begin only after the Utility Company marketing representative has received service charge payments from the Contractor. Prior to contacting the Utility Company for service connection, the service installation controller cabinet and cable must be installed for inspection by the Utility Company.
- h. **Ground Rod.** Ground rods shall be copper-clad steel, a minimum of 10-feet in length, and 3/4-inch in diameter. Ground rod resistance measurements to ground shall be 25 ohms or less. If necessary additional rods shall be installed to meet resistance requirements at no additional cost to the contract.

Installation

- a. **General.** The Contractor shall confirm the orientation of the traffic service installation and its door side with the Engineer, prior to installation. All conduit entrances into the service installation shall be sealed with a pliable waterproof material.

- b. Pole Mounted. Brackets designed for pole mounting shall be used. All mounting hardware shall be stainless steel. Mounting height shall be as noted on the plans or as directed by the Engineer.
- c. Ground Mounted. The service installation shall be mounted plumb and level on the foundation and fastened to the anchor bolts with hot-dipped galvanized or stainless steel nuts and washers. The space between the bottom of the enclosure and the top of the foundation shall be caulked at the base with silicone.

Basis of Payment. The service installation shall be paid for at the contract unit price each for ELECTRIC SERVICE INSTALLATION of the type specified which shall be payment in full for furnishing and installing the service installation complete. The type A foundation which includes the ground rod shall be paid for separately. SERVICE INSTALLATION, POLE MOUNTED shall include the 3/4-inch grounding conduit, ground rod, and pole mount assembly. Any changes by the utility companies shall be approved by the Engineer and paid for as an addition to the contract according to Article 109.05 of the Standard Specifications.

GROUNDING OF TRAFFIC SIGNAL SYSTEMS

Revise Section 807 of the Standard Specifications to read:

General. All traffic signal systems, equipment and appurtenances shall be properly grounded in strict conformance with the NEC. See IDOT District 1 Traffic Signal detail plan sheet for additional information.

The grounding electrode system shall include a ground rod installed in all foundations, intersection handholes, and the service installation. An additional ground rod will be required at locations where measured resistance to ground exceeds 25 ohms. Ground rods are included in the associated pay items and will not be paid for separately. Testing shall be according to Article 801.11.

- a) The grounded conductor (neutral conductor) shall be white color-coded. This conductor shall be bonded to the equipment-grounding conductor only at the Electric Service Installation. All power cables shall include one neutral conductor of the same size.
- b) The equipment-grounding conductor shall be green color-coded. The following is in addition to Article 801.14 of the Standard Specifications.
 - 1) Equipment grounding conductors shall be XLP insulated No. 6, unless otherwise noted on the plans, and bonded to the grounded conductor

(neutral conductor) only at the electric service installation. The Earth shall not be used as the equipment-grounding conductor, and no splices shall be allowed in the cable between ground rods. The equipment-grounding conductor is paid for separately.

- 2) Equipment grounding conductors shall be bonded, using a Listed grounding connector, to all traffic signal mast arm poles, traffic signal posts, pedestrian posts, pull boxes, handhole frames and covers and other metallic enclosures throughout the traffic signal wiring system, except where noted herein. A Listed electrical joint compound shall be applied to all conductors' terminations, connector threads and contact points.
 - 3) All metallic and non-metallic raceways containing traffic signal circuit runs shall have a continuous equipment-grounding conductor, with the following exceptions: Raceways containing only detector loop lead-in circuits, circuits under 50 volts and/or fiber optic cable will not be required to include an equipment-grounding conductor.
- c) The grounding electrode conductor shall be similar to the equipment-grounding conductor in color coding (green) and size. The grounding electrode conductor is used to connect the ground rod to the equipment grounding conductor and is bonded to ground rods via exothermic welding, listed pressure connectors, listed clamps or other approved listed means.

CONDUIT IN GROUND

The conduit shall meet the requirements of Section 810 of the "Standard Specifications," except for the following:

Delete Article 810.01 of the Standard Specifications and add the following:

Description. This item shall consist of furnishing and installing galvanized steel conduit, fittings and accessories in the ground, either pushed, trenched, plowed, or directionally bored, with fittings complete as specified herein and as shown on the Contract drawings.

Add the following to Article 810.03 of the Standard Specifications:

Pavement, driveways, and curbs shall not be removed to install electrical conduits. All buried conduits shall be placed at a minimum depth of 30 inches, except under railroad tracks, where the minimum depth shall be five (5) feet, as measured from the final surface grade to the top of the conduit. All conduit couplings shall be threaded. Conduits terminating in junction and pull boxes shall be terminated with hubs.

When empty conduit is installed for future traffic signal interconnects(s), the Contractor shall provide a pull line within the conduit.

Revise Article 810.05 of the Standard Specifications to read:

Basis of Payment: This work will be paid for at the contract unit price per foot for CONDUIT IN TRENCH or CONDUIT PUSHED of the type and size specified, which price shall be payment in full for furnishing and installing the conduit either pushed, trenched, plowed, or directionally bored with fittings, complete. Area restoration is incidental to the cost of this item.

HANDHOLES

Add the following to Section 814 of the Standard Specifications:

All handholes shall be cast-in-place concrete, with a minimum inside dimension of 21-1/2 inches. Frames and lid openings shall match this dimension. The minimum wall thickness for heavy-duty hand holes shall be 12 inches. The handhole cover shall be labeled "Traffic Signals" with legible raised letters.

All conduits shall enter the handhole at a minimum depth of thirty (30) inches. However, the depth of conduit from detector loops located less than five (5) feet from the handhole may be less than thirty (30) inches.

All cable hooks shall be hot-dipped galvanized in accordance with AASHTO Specification M111. Hooks shall be a minimum of 3/8-inch diameter and extend into the handhole at least 6 inches. Hooks shall be placed a minimum of 12 inches below the lid, or lower if additional space is required. All cable hooks shall be secured with a retaining nut tightened against the handhole concrete.

GROUNDING CABLE

The cable shall meet the requirements of Section 817 of the "Standard Specifications," except for the following:

Add to Article 817.02 of the Standard Specifications:

Unless otherwise noted on the Plans, the system grounding cable shall be one conductor, #6 gauge copper, with an XLP jacket.

The system grounding cable shall be bonded, using a Listed grounding connector (Burndy type KC/K2C, as applicable, or approved equal), to all new and existing traffic signal mast arm poles and traffic/pedestrian signal posts, including push button posts.

Revise Article 817.05 of the Standard Specifications to read:

Basis of Payment. Payment shall be at the Contract unit price, per foot, for ELECTRIC CABLE IN CONDUIT, GROUNDING, NO. 6, 1C, which price includes all associated labor and material including grounding clamps, splicing, exothermic welds/other Listed connectors and hardware.

TRAFFIC-ACTUATED CONTROLLER

Add the following to Section 857 of the Standard Specifications:

The controller shall be the latest model available that is compatible with "Zone Monitor IV" or "Aries" software, currently in use by LCDOT, and shall be NEMA TS2 Type 1 compatible, unless specified otherwise on the plans. Only controllers supplied by approved District 1 closed-loop equipment manufacturers will be allowed. The controller shall be the most recent model and software version supplied by the manufacturer at the time of the approval. The traffic signal controller shall provide features to inhibit simultaneous display of circular yellow and yellow arrow indications.

INTERSECTION MONITOR MODULE

This item shall consist of furnishing and installing an Intersection Monitor Module in a traffic signal controller. The module shall be manufactured by the same manufacturer as the traffic signal controller. This module is necessary at isolated (non-interconnected) traffic signals in order to monitor the intersection and controller operations.

Basis of Payment: This item will be paid for at the contract unit price each for INTERSECTION MONITOR MODULE, which price shall be payment in full for furnishing and installing the monitor module complete with all necessary connections and equipment for proper operations.

CONCRETE FOUNDATIONS

Add the following to Article 878.03 of the Standard Specifications:

All anchor bolts shall be according to Article 1006.09, except all anchor bolts shall be hot dipped galvanized the full length of the anchor bolt including the hook.

Concrete Foundations, Type "A" for Traffic Signal Posts shall provide anchor bolts with the bolt pattern specified within the "District 1 Standards Traffic Signal Design Details". All Type A foundations shall be a minimum depth of forty-eight (48) inches.

Concrete Foundations, Type "D" for Traffic Signal Cabinets shall be constructed a minimum of forty-eight (48) inches long by thirty-one (31) inches wide, and shall have a minimum depth of forty-eight (48) inches. The concrete apron at the signal cabinet shall be constructed to 36 inches by 48 inches by 5 inches. Anchor bolts shall be provided and spaced according to the cabinet manufacturer's specifications.

Concrete Foundations, Type "E" for Mast Arm and Combination Mast Arm Poles shall meet the following requirements:

DESIGN TABLE FOR 30-INCH DIAMETER FOUNDATION
FOR ALL MAST ARMS 14 FEET TO 55 FEET, AND ALL COMBINATION POLES
(DESIGN DEPTH FOR ALL TYPE "E" FOUNDATIONS IS 15 FEET)

	TYPE OF SOIL DESCRIPTION	STANDARDS	DESIGN DEPTH OF FOUNDATION
1	SOFT CLAY	$Q_u = 0.25$ to 0.5 ton/ft^2	17 ft. – 6 in.
2	MEDIUM CLAY	$Q_u = 0.5$ to 1.0 ton/ft^2	12 ft. – 6 in.
3	STIFF CLAY	$Q_u = 1.0$ to 2.0 ton/ft^2	8 ft. – 6 in.
4*	LOOSE SAND	$N = 4-10$	10 ft. – 0 in.
5*	MEDIUM SAND	$N = 10-30$	9 ft. – 0 in.
6*	DENSE SAND	$N = 30-50$	8 ft. – 0 in.

*WATER TABLE ASSUMED BELOW DEPTHS SPECIFIED

N = Number of blows per foot, Standard Penetration Test

Q_u = Unconfined compressive strength, in ton/ft^2 .

The Resident Engineer shall approve the proposed depth of the foundation prior to placing any concrete. Foundations used for Roadway Lighting shall provide an extra 2½" duct.

EMERGENCY VEHICLE PRIORITY SYSTEM

Revise Section 887 of the Standard Specifications to read:

If not marked in the Contract plans, it shall be the Contractor's responsibility to contact the municipality or fire district to verify the brand of emergency vehicle preemption equipment to be installed prior to the contract bidding. The equipment must be of the latest type manufactured and must be completely compatible with all components of signal equipment currently in use by the County.

All new installations shall be equipped with confirmation beacons as shown on the District 1 "Standard Traffic Signal Design Details". The confirmation beacon shall consist of a 150 watt Par 38 flood lamp for each direction of preemption. The lamp shall have an adjustable mount with a weatherproof enclosure for cable splicing. All hardware shall be cast aluminum or stainless steel. Holes drilled into signal poles, mast arms, or posts shall require rubber grommets to prevent chafing of wires. In order to maintain uniformity between communities, the confirmation beacons shall indicate when the control equipment receives the preemption signal. The preemption movement shall be signaled by a flashing indication at the rate specified by Section 4K.01 of "MUTCD". The stopped preempted movements shall be signaled by a continuous indication.

All light operated systems shall operate at a uniform rate of $14.035 \text{ hz} \pm 0.002 \text{ hz}$, or as otherwise required by the Traffic Engineer, and provide compatible operation with other light systems currently being operated in the County.

Basis of Payment. The work shall be paid for at the contract unit price each for furnishing and installing LIGHT DETECTOR and LIGHT DETECTOR AMPLIFIER. Furnishing and installing the confirmation beacon shall be incidental to the cost of the Light Detector. The light detector amplifier shall be paid for on a basis of (1) one each per intersection controller and shall provide operation for all movements required in the pre-emption phase sequence.

PEDESTRIAN PUSH-BUTTON

Replace Article 1074.02 of the Standard Specifications with the following:

Pedestrian Push-button assembly shall be a Campbell Company Enlightened PPB Station with solid stainless steel plunger and red LED indicator, or an approved equal. The pushbutton station/assembly shall be installed with a 5-inch by 7³/₄-inch sign, according to the following:

Where pedestrian signal heads are used, pedestrian signs shall provide the "Push Button for" legend, with the Walking Man symbol and arrow (R10-4b). Where no pedestrian

signal heads are used, pedestrian signs shall provide the "Push Button for Green Light" legend with arrow (R10-3 with arrow), or as specified on the plans.

Basis of Payment: This work shall be paid for at the contract unit price each for PEDESTRIAN PUSH BUTTON. The price shall include the pedestrian sign, the mounting hardware, and all material required to complete the work.

CONTROLLER CABINET AND PERIPHERAL EQUIPMENT

Add the following to Article 1074.03 of the Standard Specifications:

Cabinets shall be designed for NEMA TS2 Type 1 operation. All cabinets shall be pre-wired for a minimum of eight (8) phases of vehicular, four (4) phases of pedestrian, and four (4) phases of overlap operation. Individual load switches shall be provided for each vehicle, pedestrian, and right turn overlap phase.

- Cabinets – Fabricated of 1/8" thick unpainted aluminum alloy 5052-H32. The surface shall be smooth, free of marks and scratches. All external hardware shall be stainless steel.
- Controller Harness – Provide a TS2 Type 2 "A" harness in addition to the TS2 Type 1 harness.
- Surge Protection – EDCO Model 1210 IRS with failure indicator.
- BIU – Containment screw required.
- Transfer Relays – Solid state required.
- Switch Guards – All switches shall be guarded.
- Heating – Two (2) porcelain light receptacles with cage protection controlled by both a wall switch and a thermostat.
- Plan & Wiring Diagrams – 12" x 16" moisture sealed container attached to door.
- Detector Racks – Fully wired and labeled for four (4) channels of emergency vehicle pre-emption and sixteen (16) channels of vehicular operation.
- Field Wiring Labels – All field wiring shall be labeled.
- Field Wiring Termination – Approved channel lugs required.

- Power Supply – Provide a nonconductive shield.
- Circuit Breaker – Unless otherwise noted, the circuit breaker shall be rated thirty (30) amps.
- Police Door – Provide wiring and termination for plug-in manual phase advance switch.
- Railroad Pre-Emption Test Switch – Eaton 8830K13 SHA 1250 or approved equivalent.

This work will be paid for at the contract unit price each for FULL ACTUATED CONTROLLER AND TYPE IV CABINET.

ELECTRIC CABLE

Delete "or stranded, and No. 12 or" from the last sentence of Article 1076.04 (a) of the Standard Specifications.

The electric service cable shall have an XLP jacket. All other cable jackets shall be polyvinyl chloride, meeting the requirements of IMSA 19-1 or IMSA 20-1. The jacket color for signal cable shall be black. The jacket color for lead-in and communications cable shall be gray. All cabling between the signal cabinet and the signal heads shall be solid copper, not multi-stranded. Heat shrink splices shall be used according to the District 1 "Standard Traffic Signal Design Details".

This work will be paid for at the contract unit price per meter for ELECTRIC CABLE IN CONDUIT of the type specified.

STEEL COMBINATION MAST ARM ASSEMBLY AND POLE

Add the following to Article 1077.03 of the Standard Specifications:

For standardization, the poles for all mast arms and combination mast arms shall be manufactured with an eighteen (18)-inch bolt circle at the foundation base plate, regardless of mast arm length.

Traffic signal mast arms shall be one-piece construction, unless otherwise approved by the Engineer. All mast arms and poles shall be galvanized.

Luminaire arms shall be galvanized steel, truss style, clamp-on, and a minimum fifteen (15) feet in length. Luminaires shall be "cobra head" style, with a minimum mounting height of forty (40) feet.

The base of the mast arm pole shall be protected by a Component Products bolt-on galvanized metal shroud or an approved equal, in lieu of stainless steel screening.

This work will be paid for at the contract unit price each for STEEL COMBINATION MAST ARM ASSEMBLY AND POLE of the height specified.

TRAFFIC SIGNAL POST

Add the following to Article 1077.01 (d) of the Standard Specifications:

Posts and bases shall be steel and hot-dipped galvanized.

SIGNAL HEADS

Add the following to Section 1078 of the Standard Specifications to read:

All signal and pedestrian heads shall provide 12-inch displays with glossy yellow polycarbonate housings. Connecting hardware and mounting brackets shall be black polycarbonate or galvanized steel. A corrosive-resistant, anti-seize lubricant shall be applied to all mounting bracket joints. The lubricant shall be visible to the inspector at the signal turn-on. Post-top mounting collars are required on all posts, and shall be constructed of the same material as the brackets. The bulbs shall be manufactured by Duratest, Sylvania or an approved equal. Signal heads shall be positioned according to the District 1 "Standard Traffic Signal Design Details".

Pedestrian signal heads shall be furnished with the international symbolic "Walking Person" and "Upraised Palm" lenses. Egg crate sun shields are not permitted.

Where specified, pedestrian signal heads with a countdown timer shall consist of two (2) 12-inch by 12-inch modules aligned vertically. The top module of the unit shall be an LED message-bearing surface supplied with overlapping outline "HAND" and "MAN" symbols that comply with the PTCSI standard for these symbols. The bottom module of the unit shall house a LED countdown traffic signal consisting of a two digit numerical display ("00" to "99") a minimum of seven (7) inches in height. The counter shall begin countdown at the beginning of the pedestrian clearance interval as the pictogram of the hand starts flashing. The counter shall execute a countdown of the time, in seconds, of the pedestrian clearance interval synchronized with the controller and ending at (0) at the expiration of the clearance interval. The counter shall be blank at all other times.

The pedestrian signal heads shall be paid for at the contract unit price per each for the type signal head specified. The price shall be payment in full for furnishing and installing the pedestrian signal head complete.

SIGNAL HEAD, BACKPLATE

Replace the first sentence of Article 1078.03 of the Standard Specifications with "All backplates shall be aluminum" and louvered".

SIGNAL HEAD, LIGHT EMITTING DIODE

a) General:

- 1) Signal Head, Light Emitting Diode (LED), 1 Face, (All Section Quantities), (All Mounting Types) shall meet the requirements of Sections 880 and 881 and Articles 1078.01 and 1078.02 of the "Standard Specifications for Road and Bridge Construction", adopted January 1, 2002, with the following modifications:
- 2) All signal and pedestrian heads shall provide 12-inch displays with glossy yellow polycarbonate housings. Connecting hardware and mounting brackets shall be polycarbonate (black) or galvanized. A corrosive resistant anti-seize lubricant shall be applied to all metallic mounting bracket joints, and shall be visible to the inspector at the signal turn-on. Post-top mounting collars are required on all posts, and shall be constructed of the same material as the brackets.
- 3) The optical unit of all traffic signal and pedestrian head sections shall be light emitting diodes (LEDs) instead of incandescent bulbs. Each signal head shall conform fully to the "Interim Purchase Specification of the Institute of Transportation Engineers (ITE) for LED Vehicle Traffic Signal Modules" published July, 1998, or applicable successor ITE specification.
- 4) The lens of each signal indication shall be tinted with a wavelength-matched color to reduce sun phantom effect and enhance on/off contrast. The tinting shall be uniform across the lens face. Polymeric lens shall provide a surface coating applied to provide abrasion resistance.
- 5) Each pedestrian signal LED module shall provide the ability to actuate the outlined upraised hand and the outlined walking person on one 12-inch section. Two (2) sections shall be installed. The top section shall be wired to illuminate only the upraised hand and the bottom section shall be the

walking man. "Egg Crate" type sun shields are not permitted. All figures must be a minimum of 9 inches in height and easily identified from a distance of 120 feet.

- 6) The LED modules shall provide constant light output under power. Modules with dimming capabilities shall have the option disabled or set on a non-dimming operation.
 - 7) In the event of a power outage, light output from the LED modules shall cease instantaneously.
 - 8) In addition to conforming with the requirements for circular LED signal modules, LED arrow indication modules shall meet existing specifications stated in the ITE Standard: "Vehicle Traffic Control Signal Heads," section 9.01. The LEDs arrow indication shall be a solid display with a minimum of three (3) outlining rows of LEDs and at least one (1) fill row of LEDs. The LEDs shall be spread evenly across the illuminated portion of the arrow area.
 - 9) The LED signal modules shall be replaced or repaired if an LED signal module fails to function as intended due to workmanship or material defects within the first 60 months from the date of delivery. LED signal modules which exhibit luminous intensities less than the minimum values specified in Section 4.1.1 of the Interim Purchase Specification of the ITE for LED Vehicle Traffic Signal Modules within the first 36 months of the date of delivery shall be replaced or repaired. The manufacturer's written warranty for the LED signal modules shall be dated, signed by an Officer of the company and included in the product submittal to the County.
 - 10) Each module shall consist of an assembly that utilizes LEDs as the light source in lieu of an incandescent lamp for use in traffic signal sections.
 - 11) The LEDs utilized in the modules shall be AlInGaP technology for red, yellow, Portland orange and white indications, and GaN for green indications, and shall be the ultra bright type rated for 100,000 hours of continuous operation from -40°C to +74°C.
 - 12) The individual LEDs shall be wired such that a catastrophic loss or the failure of one or more LED will not result in the loss of the entire module.
- b) Electrical:
- 1) Maximum power consumption for LED modules is per Table 1.

- 2) LED modules will have EPA Energy Star compliance ratings, if applicable to that shape, size and color.
 - 3) The modules shall operate from a 60 HZ ± 3 HZ AC line over a voltage ranging from 95 volts to 135 volts. The fluctuations of line voltage shall have no visible effect on the luminous intensity of the indications.
 - 4) Operating voltage of the modules shall be 120 VAC. All parameters shall be measured at this voltage.
 - 5) The LED signal module shall have a power factor of 0.90 or greater.
 - 6) Total harmonic distortion (current and voltage) induced into an AC power line by a LED signal module shall not exceed 20 percent.
 - 7) The signal module on-board circuitry shall include voltage surge protection to withstand high-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2, 1992.
 - 8) The LED circuitry shall prevent perceptible flicker to the unaided eye over the voltage range specified above.
 - 9) All wiring and terminal blocks shall meet the requirements of Section 13.02 of the ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads).
 - 10) The modules shall be operationally compatible with currently used controller assemblies (solid state load switches, flashers, and conflict monitors).
 - 11) When a current of 20 mA AC (or less) is applied to the unit, the voltage reading across the two leads shall be 15 VAC or less.
 - 12) The modules and associated on-board circuitry must meet Class A emission limits referred in Federal Communications Commission (FCC) Title 47, Subpart B, Section 15 regulations concerning the emission of electronic noise.
- c) Photometric Requirements:
- 1) The minimum initial luminous intensity values for the modules shall be as stated in Table 2 and/or Table 4 at 25°C.

- 2) The modules shall meet or exceed the illumination values as shown in Table 3 and/or Table 4, throughout the useful life based on normal use in a traffic signal operation over the operating temperature range.
 - 3) The measured chromaticity coordinates of the modules shall conform to the chromaticity requirements of Table 5, throughout the useful life over the operating temperature range.
- d) Environmental Requirements:
- 1) The LED signal module shall be rated for use in the operating temperature range of -40°C (-40°F) to $+74^{\circ}\text{C}$ ($+165^{\circ}\text{F}$). The modules shall meet all specifications throughout this range.
 - 2) The LED signal module shall be protected against dust and moisture intrusion per the requirements of NEMA Standard 250-1991 for Type 4 enclosures to protect all internal components.
- e) Construction:
- 1) The LED signal module shall be a single, self-contained device, not requiring on-site assembly for installation. The power supply for the module shall be integral to the unit.
 - 2) The circuit board and power supply shall be contained inside the module.
 - 3) The assembly and manufacturing process for the LED signal assembly shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources.
- f) Materials:
- 1) Material used for the lens and signal module construction shall conform to ASTM specifications for the materials.
 - 2) Enclosures containing either the power supply or electronic components of the signal module shall be made of UL94VO flame retardant materials. The lens of the signal module is excluded from this requirement.

g) Traffic Signal and Pedestrian LED Module Identification:

- 1) Each module shall have the manufacturer's name, trademark, model number, serial number, date of manufacture (month-year), and lot number as identification permanently marked on the back of the module.
- 2) The following operating characteristics shall be permanently marked on the back of the module: rated voltage and rated power in Watts and Volt-Ampere.
- 3) Each module shall have a symbol of the type of module (i.e. circle, arrow, etc.) in the color of the module. The symbol shall be one inch in diameter. Additionally, the color shall be written out in ½-inch letters next to the symbol.
- 4) If a specific mounting orientation is required, each module shall have prominent and permanent marking(s) for correct indexing and orientation within a signal housing. The markings shall consist of an up arrow, or the word "UP" or "TOP".

h) Traffic Signal LED Module:

- 1) Modules can be manufactured under this specification for the following faces:
 - a) 12-inch circular, multi-section
 - b) 12-inch arrow, multi-section
 - c) 12-inch pedestrian, 2 sections
- 2) The maximum weight of a module shall be four (4) pounds.
- 3) Each module shall be a sealed unit to include all parts necessary for operation (a printed circuit board, power supply, a lens and gasket, etc.), and shall be weather proof after installation and connection.

i) Retrofit Traffic Signal Module: All other specifications, including section h) above, apply unless specifically superseded in this section.

- 1) The module shall fit into existing traffic signal section housings built to the specifications detailed in ITE Publication: Equipment and Material Standards, Chapter (Vehicle Traffic Control Signal Heads).

- 2) Each Retrofit module shall be designed to be installed in the doorframe of a standard traffic signal housing. The Retrofit module shall be sealed in the doorframe with a one-piece EPDM (ethylene propylene rubber) gasket.
- 3) The lens of the Retrofit module shall be integral to the unit, shall be convex with a smooth outer surface and made of plastic or of glass.

j) Connection Requirements

Two secured, color coded, 600 V, 20 AWG minimum, jacketed wires, conforming to the National Electric Code, rated for service at +105°C, are to be provided for electrical connection for each LED signal module. Conductors for modules, including Retrofit modules, shall be minimum forty (40) inches long, with quick disconnect terminals attached.

k) Lens:

- 1) The lens of the module shall be tinted and integral to the unit, convex with a smooth outer surface and made of plastic.
- 2) The use of tinting or other materials to enhance ON/OFF contrasts shall not affect chromaticity and shall be uniform across the face of the lens.
- 3) The LED signal module lens shall be UV stabilized and shall be capable of withstanding ultraviolet (direct sunlight) exposure for a minimum period of 60 months without exhibiting evidence of deterioration.
- 4) The polymeric lens shall have a surface coating or chemical surface treatment to provide front surface abrasion resistance.

l) 12-inch arrow module: All other specifications apply unless specifically superseded in this section.

- 1) The arrow module shall meet specifications stated in Section 9.01 of the ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads) for arrow indications.
- 2) The LEDs shall be spread evenly across the illuminated portion of the arrow area.

- m) 12-inch PV module: All other specifications apply unless specifically superceded in this section.
- 1) The module shall be designed and constructed to be installed in a PV signal housing without modification to the housing.
 - 2) The LEDs shall be spread evenly across the module.

Basis of Payment: This item shall be paid for at the contract unit price each for SIGNAL HEAD, LED, of the type specified, which price shall be payment in full for furnishing the equipment described above including signal head, LED(s) modules, all mounting hardware, and installing them in satisfactory operating condition. The type specified will indicate the number of signal faces, the number of signal sections, and the method of mounting.

Pedestrian head(s) shall be paid for at the contract unit price each for PEDESTRIAN SIGNAL HEAD, LED, of the type specified and of the particular kind of material when specified. The type specified will indicate the number of faces and the method of mounting.

When installed in an existing signal head, this item shall be paid for at the contract unit price each for SIGNAL HEAD, LED of the type specified, RETROFIT, which price shall be payment in full for furnishing the equipment described above including LED(s) modules, all mounting hardware, and installing them in satisfactory operating condition. The type specified will indicate the number of signal faces, the number of signal sections, and the method of mounting.

When installed in an existing signal head, this item shall be paid for at the contract unit price each for PEDESTRIAN SIGNAL HEAD, LED, of the type specified, RETROFIT, which price shall be payment in full for furnishing the equipment described above including LED(s) modules, all mounting hardware, and installing them in satisfactory operating condition. The type specified will indicate the number of faces and the method of mounting.

TABLES

Table 1: Maximum Power Consumption (in Watts)

	Red		Yellow		Green	
Temperature	25°C	74°C	25°C	74°C	25°C	74°C
12-inch circular	11	17	22	25	15	15
12-inch arrow	9	12	10	12	11	11
	Hand-Portland Orange		Person-White			
Pedestrian Indication	6.2		6.3			

Table 2: Minimum Initial Intensities for Circular Indications (in cd)

	12-inch		
Angle (v,h)	Red	Yellow	Green
2.5, ±2.5	399	798	798
2.5, ±7.5	295	589	589
2.5, ±12.5	166	333	333
2.5, ±17.5	90	181	181
7.5, ±2.5	266	532	532
7.5, ±7.5	238	475	475
7.5, ±12.5	171	342	342
7.5, ±17	105	209	209
7.5, ±22.5	45	90	90
7.5, ±27.5	19	38	38
12.5, ±2.5	59	119	119
12.5, ±7.5	57	114	114
12.5, ±12.5	52	105	105
12.5, ±17.5	40	81	81

	12-inch		
Angle (v,h)	Red	Yellow	Green
12.5, ± 22.5	26	52	52
12.5, ± 27.5	19	38	38
17.5, ± 2.5	26	52	52
17.5, ± 7.5	26	52	52
17.5, ± 12.5	26	52	52
17.5, ± 17.5	26	52	52
17.5, ± 22.5	24	48	48
17.5, ± 27.5	19	38	38

Table 3: Maintained Minimum Intensities for Circular Indications (in cd)

	12-inch		
Angle (v,h)	Red	Yellow	Green
2.5, ± 2.5	339	678	678
2.5, ± 7.5	251	501	501
2.5, ± 12.5	141	283	283
2.5, ± 17.5	77	154	154
7.5, ± 2.5	226	452	452
7.5, ± 7.5	202	404	404
7.5, ± 12.5	145	291	291
7.5, ± 17.5	89	178	178
7.5, ± 22.5	38	77	77
7.5, ± 27.5	16	32	32
12.5, ± 2.5	50	101	101
12.5, ± 7.5	48	97	97

	12-inch		
Angle (v,h)	Red	Yellow	Green
12.5, ± 12.5	44	89	89
12.5, ± 17.5	34	69	69
12.5, ± 22.5	22	44	44
12.5, ± 27.5	16	32	32
17.5, ± 2.5	22	44	44
17.5, ± 7.5	22	44	44
17.5, ± 12.5	22	44	44
17.5, ± 17.5	22	44	44
17.5, ± 22.5	20	41	41
17.5, ± 27.5	16	32	32

Table 4: Minimum Initial & Maintained Intensities for Arrow and Pedestrian Indications (in cd/m^2)

	Red	Yellow	Green
Arrow Indication	5,500	11,000	11,000

Table 5: Chromaticity Standards (CIE Chart) Section 8.04 of ITE

Red	Y: not greater than 0.308, or less than $0.998 - x$
Yellow	Y: not less than 0.411, nor less than $0.995 - x$,
Green	Y: Not less than $0.506 - 0.519x$, nor less than $0.150 + 1.068x$, nor more than $0.730 - x$

VIDEO DETECTION SYSTEM (COMPLETE INTERSECTION)

This specification sets forth the minimum requirements for a system that monitors vehicles on a roadway via processing of video images and provides detector outputs to a traffic controller or similar device. This work shall consist of furnishing and installing an Autoscope Solo Pro or approved equal video vehicle detection system at one signalized

intersection, including all necessary hardware, cable and accessories necessary to complete the installation in accordance with the manufacturer's specifications.

In order for the Traffic Engineer to manipulate detection zones and view the video signal over an ISDN phone line, the VIDEO DETECTION SYSTEM, (complete intersection) must be connected to one of the following:

- VIDEO TRANSMISSION SYSTEM
- VIDEO COMMUNICATIONS SYSTEM AND CABINET

Whenever the VIDEO DETECTION SYSTEM, (complete intersection) and either the VIDEO TRANSMISSION SYSTEM or the VIDEO COMMUNICATIONS SYSTEM AND CABINET are installed at separate signalized intersections, fiber-optic video/data transmitters and receivers will be required, and shall be included in the cost of this item.

The system shall consist of integrated machine vision processor sensors (MVPs), an electrical interface panel, and a detector interface card. The quantity of MVP sensors included with this pay item shall be as shown on the plans. The system shall also include a ten-inch color VGA monitor with BNC connector for video input. A simple multi-camera video switching unit shall be provided to select video input to the monitor. Vehicle detection zones shall be user-defined through interactive graphics by placing lines and/or boxes in an image on a VGA monitor. The system shall calculate traffic parameters in real-time and provide local non-volatile data storage for later downloading and analysis.

I. Introduction

The video vehicle detection system shall be easily configurable and expandable to meet traffic management applications such as intersection control, traffic monitoring, incident management, and traffic data collection. The system shall be composed of the following components:

- A machine vision processor (MVP) sensor that provides vehicle detection, JPEG video compression, and communications with other subsystems.
- Detector Interface Card (Mini-Hub TS-2)
- A Windows-based communications and Windows-based applications software for setup and system configuration as well as any continued monitoring and data collection, if required.
- System communications that shall operate over any appropriate serial communications links provided by the systems integrator.

- An integrated color camera, zoom lens, and machine vision processor all in one unit; direct, real-time iris and shutter speed control; with single-frame, JPEG image compression.
- The system shall also have easily configured IP addressing for the MVP sensor field network.

II. MVP Sensor

The MVP sensor shall combine an integrated high-speed, color imaging CCD array with zoom lens optics, image-processing hardware and a general-purpose CPU bundled into a sealed enclosure. The sensor shall be equipped with a sunshield to reflect solar heat and to shield the CCD array and faceplate from direct exposure to the sun. The sensor shall also be equipped with a faceplate heater to prevent accumulated ice, snow, or condensation from obscuring the view of the camera. The general-purpose CPU shall directly control the optics and camera electronics.

The lens shall be pre-focused at the factory and shall not require field adjustment. The zoom optics shall maintain focus throughout the operating range from 7 to 74 degrees horizontal field of view (5 to 58 degrees vertical field of view). At an operator's request, the MVP sensor shall temporarily switch to surveillance mode operation, which allows the operator to zoom the lens.

The MVP sensor shall provide color analog video output at 30 frames per second, and shall process a minimum of twenty (20) detector zones placed anywhere in the field of view of the sensor. The analog video output shall provide graphics overlay that indicates the current real-time detection state.

MVP Sensor External Interfaces

The external interfaces to the MVP sensor shall include the following:

Network Communications Port

There shall be a field network communications port to configure and provide general communications and data retrieval. The MVP sensor shall use a full- or half-duplex, RS-485, 4-wire electrical network to facilitate communications with a Windows computer. This port shall be used to update the embedded software and to interact with applications software for the various detection requests supported by the MVP sensor.

Detector I/O Port

The MVP sensor detector port shall use a dedicated, RS-485 2-wire, half-duplex interface between the MVP sensor and a detector interface card also known as a detector port

master (DPM) (e.g. Mini-Hub TS2). The real-time state of traffic controller phase inputs shall be transmitted to the MVP sensor. The detector port master interface card shall subsequently translate the detection states to a traffic signal controller.

Differential Video

The MVP sensor shall output full motion, differential analog video over a single, twisted pair.

Power

The MVP sensor shall operate on 24 VAC at 50/60 Hz or 24 VDC. The camera and processor electronics and power supply shall consume a maximum of 10 watts. The integrated faceplate heater shall consume a maximum of 5 watts.

MVP Sensor Vehicle Detection Requirements

The MVP sensor shall be able to be programmed with a variety of detector types which can perform the following functions:

- Presence/passage detection of moving and stopped vehicles.
- Detection based on the direction of travel.
- Measure vehicle speed and length and provide five (5) classes of vehicles based on length.
- Detect incident shock waves using effective detection algorithms.
- Generate alarm status based on the detection of shock waves, wrong-way vehicles, stopped vehicles, red-light runners, or other operator-defined traffic conditions.
- Combine the output of multiple detectors with logical operators and modify the combined state based on delay or extension timers.

Detection Zone Programming

A VGA monitor shall display the detection zones superimposed on images of traffic scenes. A mouse and keyboard shall be used to place, size, and orient detection zones and edit previously defined detector configurations. It shall also be possible to download detector configurations from the computer to the MVP sensor and upload the current detector configuration that is running in the MVP sensor.

Count Detection Performance

Using an MVP sensor installed for optimal viewing, the system shall be able to accurately count vehicles with at least 96% accuracy under normal operating conditions (day and night), and at least 93% accuracy under artifact conditions. Artifact conditions are combinations of weather and lighting conditions that result from shadows, fog, rain, snow, etc. The volume count shall be accumulated for all traveled lanes, and accumulated over time intervals that contain a minimum of one hundred (100) vehicles to ensure statistical significance.

Demand Presence Detection Performance

The system shall be able to accurately provide demand presence detection. The demand presence accuracy shall be based on the ability to enable a protected turning movement on an intersection stop line, when a demand exists. The probability of not detecting a vehicle for demand presence shall be less than 1-percent error under all operating conditions. In the presence of artifact conditions, the MVP sensor shall minimize extraneous (false) protected movement calls to less than 7%.

Speed Detection Performance

The MVP sensor shall accurately measure average speed of multiple vehicles with more than 98% accuracy under all operating conditions for approaching and receding traffic. The MVP sensor shall accurately measure individual vehicle speeds with more than 95% accuracy under all operating conditions for vehicles approaching the sensor and 90% accuracy for vehicles receding from the sensor.

MVP Sensor Enclosure

The MVP sensor and lens assembly shall be housed in an environmental enclosure that provides the following capabilities:

- The enclosure shall be waterproof and dust-tight to NEMA-4 specifications, and shall have the option to be pressurized with dry nitrogen to 5 ± 1 psi.
- The enclosure shall allow the MVP sensor to operate satisfactorily over an ambient temperature range from -34 degrees C to $+60$ degrees C while exposed to precipitation as well as direct sunlight.
- The enclosure shall allow the image sensor horizon to be rotated during field installation.
- A faceplate heater shall prevent the formation of ice and condensation in cold weather.

MVP Sensor Electrical

All video connections from the sensor shall be isolated from earth ground. The video output, communication, and power stages of the sensor shall include transient protection to prevent damage to the sensor. The MVP sensor shall meet CE, FCC, and UL requirements for safety and EMI.

Communications Panel Requirements

The communications interface panel shall provide a terminal block for terminating power, as well as terminations for two twisted-pair wires for network communications to the MVP sensor, one twisted-pair for video output from the MVP sensor, and one twisted-pair for detector port communications. The panel shall also provide two sets of terminations for two twisted-pair wires for a point-to-point field network. The communications interface panel shall also provide transient protection and a DB9 connector for an optional traffic signal controller interface.

III. Detector Interface Card (Mini-Hub TS-2)

The system shall use a defined communication protocol (detector port protocol) between the MVP sensors and the Mini-Hub TS2. The protocol shall be used to communicate TS1 input pins, TS1 output pins, TS2 detector states, and TS2 phase states. The detector interface card shall be the master of the detector port (DPM) and the MVP sensors shall be the slaves. The DPM shall issue a command for a single or up to eight (8) MVP sensors to respond. The DPM shall exchange input and output state data with the MVP sensor every 100 ms. The DPM interface card shall subsequently translate the detection states to a traffic signal controller. Each input or output pin of an interface card shall have one associated LED output to reflect its input or output state.

IV. Basis of Payment

This work will be paid for at the contract unit price each for VIDEO DETECTION SYSTEM.

(COMPLETE INTERSECTION) which price shall be payment in full for furnishing all associated equipment required, installing the system at one signalized intersection, and placing the system in operation to the satisfaction of the Engineer.

REMOTE-CONTROLLED VIDEO SYSTEM

This pay item shall include providing and installing a remote-controlled video system at a location designated by the Engineer. The remote-controlled video system shall be a PELCO Spectra II Series Discreet Dome System or approved equal. This pay item shall include a color camera (minimum 16x or 22x optical zoom), dome assembly, all mounting hardware, connectors, cables, and related equipment necessary to complete the installation in accordance with the manufacturer's specifications.

In order for the Traffic Engineer to control the camera remotely and view the video signal over an ISDN phone line, the remote-controlled video system must be connected to one of the following:

- VIDEO TRANSMISSION SYSTEM
- VIDEO COMMUNICATIONS SYSTEM AND CABINET

Whenever the REMOTE-CONTROLLED VIDEO SYSTEM and either the VIDEO TRANSMISSION SYSTEM or the VIDEO COMMUNICATIONS SYSTEM AND CABINET are installed at separate signalized intersections, fiber-optic video/data transmitters and receivers will be required, and shall be included in the cost of this item.

Basis of Payment: This item will be paid for at the contract unit price each for REMOTE-CONTROLLED VIDEO SYSTEM, which price shall be payment in full for furnishing all associated equipment required, installing the system complete and in place, and placing the system in operation to the satisfaction of the Engineer.

VIDEO TRANSMISSION SYSTEM

General

This specification sets forth the minimum requirements for a video transmission system that allows a user to transmit video output from multiple cameras to a remote location, via telephone video transmitter(s) and an ISDN communication link.

This pay item is to be used when the system components described below are being installed in an intersection traffic signal cabinet. The intersection traffic signal cabinet may be either new or existing, and may be either Type IV or Type V, as directed by the Engineer, based upon camera and equipment requirements.

The VIDEO TRANSMISSION SYSTEM may include the relocation of existing telephone video transmitter(s) and/or ISDN modem(s) to a new traffic signal cabinet. The relocation of such existing equipment to a new traffic signal cabinet shall be performed as directed by the Engineer and included in the cost of the VIDEO TRANSMISSION SYSTEM. Any item damaged during removal, storage, or reinstallation shall be repaired or replaced in kind to the satisfaction of the Engineer at the Contractor's expense.

System Components

The system shall consist of telephone video transmitter(s) (ADPRO Fast Vu or approved equal), ISDN Modem(s) (Adtran ISU 128 or approved equal), and related connection cables.

Telephone Video Transmitter

1. The telephone video transmitter shall provide an initial image transmission time of 0.4-2.5 seconds via an ISDN communication link. Subsequent updates shall typically be less than 0.5 seconds depending on scene changes and communication rates.
2. The telephone video transmitter shall support NTSC/RS170 image resolutions up to 752 x 480.
3. The telephone video transmitter shall have a minimum of twenty video input channels each accepting a one-volt peak-to-peak signal. Each video input shall be interchangeable between 75 ohm or high impedance.
4. The telephone video transmitter shall have at least one video output designed to drive a 75-ohm load.

5. The telephone video transmitter shall have a minimum of twenty external alarm inputs that trigger an alarm and store images from the corresponding video channel. The inputs shall be programmable to trigger on contact opening or closure.
6. The telephone video transmitter shall have a minimum of twenty open collector control outputs that correspond to the control inputs of the receiver.
7. The telephone video transmitter shall support PSTN, ISDN, and cellular phone and RF communication links.
8. The telephone video transmitter shall communicate via an RS-232 interface, 8 data bits, no parity, either asynchronously or synchronously, with baud rates up to 115.2 kbps and 192 kbps, respectively.
9. The telephone video transmitter shall be configured with an RS-485 port that shall be used to control pan/tilt/zoom telemetry stations.
10. A hand-held device used for in-field programming shall be included with the telephone video transmitter.
11. The telephone video transmitter shall operate within 90-130 volts AC, 18 VA (max) at 110 volts.

ISDN Modem

1. The ISDN modem shall support error free data transmission up to 128 kbps on two B channels without data compression.
2. The ISDN modem shall support Multilink PPP, ITU-T V.120, Asynchronous BONDING, and Fallback protocols.
3. The ISDN modem shall be configurable via a front-panel keyboard interface.

Basis of Payment: This item will be paid for at the contract unit price each for VIDEO TRANSMISSION SYSTEM, which price shall be payment in full for furnishing and/or relocating all associated equipment required, installing the system complete and in place, and placing the system in operation to the satisfaction of the Engineer.

ELECTRIC CABLE IN CONDUIT, COAXIAL

This work shall consist of furnishing and installing a Belden 8281 RG-59U Type Coaxial Cable or approved equal. The cable shall be a 75-ohm coaxial cable with 20 AWG solid bare copper conductor, tinned copper double-braided shield (96% min), and black polyethylene jacket. The nominal outside diameter shall be 0.304 inches. Amphenol 31-71032 (or equivalent) BNC plug connectors shall be used at both the PTZ camera and traffic signal cabinet ends of the cable. An Amphenol CLT-2 crimping tool is required for the termination. No splices shall be allowed in the cable between the PTZ camera and the traffic signal cabinet.

Basis of Payment: This work will be paid for at the contract unit price per foot for ELECTRIC CABLE IN CONDUIT, COAXIAL, which price shall be payment in full for

furnishing the material, making all electrical connections and installing the cable complete, measured as specified herein.

ELECTRIC CABLE IN CONDUIT, COMMUNICATION, NO. 16, 5½ PAIR

This work shall consist of furnishing and installing a Belden YC46223 communications cable, or approved equal, in existing and/or new conduit. This Belden cable has a color code that matches the MVP cable currently in use by the County. The cable shall consist of 16 AWG stranded bare copper twisted-pair conductors, with PVC insulation, and PVC jacket with nylon ripcord. The nominal outside diameter shall be 0.502-inch.

The communications cable, No. 16, 5½ pair shall be spliced to the MVP Cable in the base of the signal mast arm pole on which the MVP is mounted. The MVP cable shall be provided by the MVP manufacturer. The communications cable shall be provided by the Contractor. The conductors from the two cables shall be spliced using the 3M Scotchlok gel-filled splice tabs (part number 314). Each splice shall be individually protected with shrink tubing. The individual splices shall also be bundled together and protected with shrink tubing. The cost of all work associated with splicing the cables shall be considered incidental to the cost of the communications cable, No. 16, 5½ pair.

Basis of Payment: This work will be paid for at the contract unit price per foot for ELECTRIC CABLE IN CONDUIT, COMMUNICATION NO. 16, 5½ PAIR, which price shall be payment in full for furnishing, installing and making all electrical connections necessary for proper operation.

ELECTRIC UTILITY SERVICE CONNECTION

Effective: January 1, 2002

Description. This item shall consist of payment for work performed by the Electric Utility Company in providing or modifying electric service as indicated. THIS MAY INVOLVE WORK AT MORE THAN ONE ELECTRIC SERVICE.

Construction Requirements:

General. It shall be the Contractor's responsibility to contact the utility. The Contractor shall coordinate his work fully with the electric utility both as to the work required and the timing of the installation. No additional compensation will be granted under this or any other item for extra work caused by failure to meet this requirement.

The Contractor should make particular note of the need for the earliest attention to arrangements with the utility for service. In the event of delay by the utility, no extension of

time will be considered applicable for the delay unless the Contractor can produce written evidence of a request for electric service within 30 days of execution.

Method Of Payment. The Contractor will be reimbursed to the exact amount of money as billed by the Electric Utility Company for its services. Work provided by the Contractor for electric service will be paid separately as described under **ELECTRIC SERVICE INSTALLATION**. No extra compensation shall be paid to the Contractor for any incidental materials and labor required to fulfill the requirements as shown on the plans and specified herein.

For bidding purposes, this item shall be estimated as \$2,500.00.

Basis Of Payment. This work will be paid for at the contract lump sum price for **ELECTRIC UTILITY SERVICE CONNECTION** which shall be reimbursement in full for electric utility service charges.

GROUND ROD

Effective: January 1, 2002

Description. This item shall consist of furnishing, installing and connecting ground rods for the grounding of service neutral conductors and for supplementing the equipment grounding system via connection at poles or other equipment throughout the system. All materials and work shall be in accordance with Article 250 of the NEC.

Materials. Materials shall be according to the following Articles of Section 1000 -
Materials

	Item	Article/Section
(a)	Ground Rod	1087.01 (b)
(b)	Copper Ground Wire	1087.01 (a)
(c)	Access Well	1087.01 (c)

Construction Requirements:

General. All connections to ground rods, structural steel or fencing shall be made with exothermic welds. Where such connections are made to insulated conductors, the connection shall be wrapped with at least 4 layers of electrical tape extended 152.4 mm (six inches) onto the conductor insulation.

Ground rods shall be driven so that the tops of the rod are 609.6 mm (24 inches) below finished grade. Where indicated, ground wells shall be included to permit access to the rod connections.

Where indicated, ground rods shall be installed through concrete foundations.

Where ground conditions, such as rock, preclude the installation of the ground rod, the ground rod may be deleted with the approval of the Engineer.

Where a ground field of "made" electrodes is provided, such as at control cabinets, the exact locations of the rods shall be documented by dimensioned drawings as part of the Record Drawings.

Ground rod connection shall be made by exothermic welds. Ground wire for connection to foundation steel or as otherwise indicated shall be stranded uncoated bare copper in accordance the applicable requirements of ASTM Designation B-3 and ASTM Designation B-8 and shall be included in this item. Unless otherwise indicated, the wire shall not be less than No. 2 AWG.

Where connections are made to epoxy coated reinforcing steel, the epoxy coating shall be sufficiently removed to facilitate the exothermic weld.

Method Of Measurement. Ground rods shall be counted, each. Ground wires and connection of ground rods at poles shall be included in this pay item.

Basis Of Payment: This item shall be paid at the contract unit price each for GROUND ROD, of the diameter and length indicated which shall be payment in full for the material and work described herein.

CONDUIT ENCASED CONCRETE, 100 MM DIA., PVC, 1 WIDE X 1 HIGH

This work shall consist of installing a PVC conduit encased in concrete in accordance with Section 810 of the Standard Specifications, of the type and dimensions specified, and as indicated in the plans.

This work will be paid for at the contract unit price per meter for CONDUIT ENCASED CONCRETE, 100 MM DIA., PVC, 1 WIDE X 1 HIGH.

LIGHTING CONTROLLER, CONSOLE TYPE, 240/480 VOLT

This work shall consist of furnishing and installing a lighting controller in accordance with the plan details and in accordance with Section 825 of the Standard Specifications.

This work will be paid for at the contract unit price each for LIGHTING CONTROLLER, CONSOLE TYPE, 240/480 VOLT.

ELECTRIC CABLE IN CONDUIT, TWISTED SHIELD, NO. 20 3/C

This work shall consist of furnishing and installing electric video cable in conduit in accordance with the applicable portion of Section 817 of the Standard Specifications and the details in the plans.

This work will be paid for at the contract unit price per meter for ELECTRIC CABLE IN CONDUIT, TWISTED SHIELD, NO. 20 3/C.

TRENCH AND BACKFILL FOR ELECTRIC WORK

Effective: January 1, 2002

Revise the first sentence of Article 815.03(a) of the Standard Specifications to read:

"Trench. Trenches shall have a minimum depth of 760 mm (30 in.) or as otherwise indicated on the plans, and shall not exceed 300 mm (12 in.) in width without prior approval of the Engineer."

Revise Article 1066.05 of the Standard Specifications to read:

"Underground Cable Marking Tape. The tape shall be 150 mm (6 in.) wide; consisting of 0.2 mm (8 mil) polyethylene according to ASTM D882, and ASTM D2103.

The tape shall be red with black lettering or red with silver lettering reading "CAUTION - ELECTRICAL LINE BURIED BELOW".

The tape shall have reinforced metallic detection capabilities consisting of a woven reinforced polyethylene tape with a metallic core or backing."

UNIT DUCT

Effective: October 1, 2002

Revise the second paragraph of Article 816.03(b) to read:

"The unit duct shall be installed at a minimum depth of 760 mm (30-inches) unless otherwise directed by the Engineer."

Revise Article 1066.01 to read:

"1066.01 Unit Duct. The unit duct shall be an assembly of insulated conductors which are factory pre-installed in a coilaible nonmetallic conduit. The polyethylene

duct shall be extruded directly over the cable at the factory in long continuous lengths. The unit duct shall be according to NEC Article 354 and be UL Listed."

Revise Article 1088.01 © to read:

"(c) Coillable Nonmetallic Conduit.

Polyethylene Duct. The duct shall be a plastic duct, which is intended for underground use and can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties of performance.

The duct shall be made of high density polyethylene which shall meet the requirements of ASTM D 2447, for schedule 40. The duct shall be composed of black high density polyethylene meeting the requirements of ASTM D 3350, Class C, Grade P33. The wall thickness shall be in accordance with Table 2 for ASTM D 2447.

Duct dimensions shall conform to the following table:

Nom. Duct Diameter		Nom. Outside Diameter		Min. Wall Thickness	
mm	in	mm	in	mm	in
27	1	33.4	1.315	3.4	0.133
35	1.25	42.2	1.660	3.6	0.140
41	1.5	48.3	1.900	3.7	0.145
53	2.0	60.3	2.375	3.9	0.154

Performance Tests. Polyethylene Duct testing procedures and test results shall Meet the requirements of ASTM D 3485. Certified copies of the test report shall be submitted to the Engineer prior to the installation of the duct. Duct crush test results shall meet or exceed the following requirements:

Duct Diameter		Min. force required to deform sample 50%	
mm	in	N	lbs
27	1	5337	1200
35	1.25	4937	1110
41	1.5	4559	1025
53	2.0	3780	850

LUMINAIRES

The luminaires to be used on this project are detailed on sheet 39 of the plans. This work will be paid for at the contract unit price per each for LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 250 WATT or for LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, PHOTO-CELL CONTROL, 250 WATT.

LIGHT POLES

The light poles to use on this project are detailed on sheet 39 of the plans. Two of the poles as located on sheet 34 of the plans shall be equipped with two (2) mast arms, 90° apart.

This work will be paid for at the contract unit price each for LIGHT POLE, STEEL, SQUARE TAPERED, 10.5M, M.H., 1.8M MAST ARM or for LIGHT POLE, STEEL, SQUARE TAPERED, 10.5M, M.H., DUAL 1.8M MAST ARMS.

BREAKAWAY BASE

This work shall consist of furnishing a Valmont breakaway base CS-370 at the bottom of each light pole as shown in the details of the highway lighting plans.

This work will be paid for at the contract unit price each for BREAKAWAY BASE, VALMONT CS-370, 14-1/2 IN. BOLT CIRCLE.

TRAFFIC CONTROL AND PROTECTION

This work shall be done in accordance with the applicable portions of Section 701 of the Standard Specification and in accordance with the Traffic Staging details included herein, and the details included in the plans. A detour plan is included in the plans. The signs and barricades needed in conjunction with the detour are included as part of this item of work.

TRAFFIC STAGING

This project is to be built using traffic staging as follows:

Stage I Construct Buffalo Grove Road/Port Clinton Road Intersection

Construct: Buffalo Grove Road
Sta. 103 + 300 to Sta. 103 + 450
Port Clinton Road
Sta. 50 + 000 to Sta. 50 + 050

Traffic: To remain on existing Port Clinton Road and Prairie Road

Traffic Control: Signage – Road Construction Ahead Signs
Flagmen – when equipment and materials are being delivered to or exiting from construction site.

Stage II Construct Buffalo Grove Road from Main Street to end of Project

Stage II-A Construct Buffalo Grove Road, east of Railroad Tracks to Intersection built in Stage I

Construct: Buffalo Grove Road
Sta. 103+ to Sta. 103 + 300
Port Clinton Road
Sta. 50 + 050 to exist Prairie Road (Sta. 50 + 095±)

Note: Local traffic is to be maintained to the park from the west. Railroad crossing to remain open until Stage II-A pavement is completed and opened to local traffic to the park.

During this stage, existing Port Clinton Road west of Prairie Road can be removed (outside the proposed pavement area).

Traffic: Port Clinton Road to be closed between Main Street and Prairie Road. A detour to be used along Main Street, Illinois Route 22 and Prairie Road. The detour plan and signing is including in the plans.

Traffic Control: Type III barricades and detour signage.

Also in Stage II-A Construct Buffalo Grove Road from pavement built in Stage I to end of Project.

Traffic: Close Prairie Road to through traffic from US 45 to Port Clinton Road. Keep Prairie Road open to local traffic from US 45 to Indian Creek Drive. Prairie Road south of Indian Creek Drive is to be closed to all traffic.

During this stage existing Prairie Road north of Port Clinton Road can be removed (outside the proposed pavement area).

Traffic Control: Type III Barricades and Signage.

Construct Buffalo Grove Road from Sta. 103 + 00 to end of Project ½ at a time.

Traffic: Maintain local traffic on Prairie Road to Indian Creek Drive.

Traffic Control: Barricades, signage, temporary pavement marking and flagmen as necessary..

Stage II-B Construct Buffalo Grove Road from Main Street to east of Railroad Tracks (to pavement built in Stage II-A).

Construct: Buffalo Grove Road
Sta. 103+ 095± (West Line of RR ROW) to Sta. 103 + 175

Note: During this stage, the RR crossing work (by others) should be completed.

During this stage, traffic to the park must be maintained from the east using pavement constructed in Stages I and II-A.

Traffic: Port Clinton Road is to be closed between Main Street and Prairie Road. A detour to be used along Main Street, Illinois Route 22 and Prairie Road.

Traffic Control: Type III barricades and detour signage.

Stage III Construct Buffalo Grove Road from beginning of Project to Main Street.

Stage III-A Construct: Temporary Widening Sta. 102 + 950 to Main Street (Sta. 103 + 80±). Remove existing median from Sta. 102 + 913.915 to Sta. 103 + 040 and replace with Temporary Pavement.

Traffic: To remain on Buffalo Grove Road.

Traffic Control: Barricades and Signage

Stage III-B Construct: Westbound lanes at Buffalo Grove Road Sta. 102 + 995(±) to RR ROW (Sta. 103 + 095±)

Traffic: Using temporary pavements constructed in Stage III-A, move traffic onto south half of Buffalo Grove Road pavement.

Traffic Control: Barricades, Temporary Pavement Marking and Signage.

Stage III-C Construct: Median Pavement at Buffalo Grove Road. Sta. 102 + 995± to Sta. 103 + 095±.

Traffic: Move westbound traffic onto newly constructed westbound lanes. Eastbound traffic to continue using temporary widening built in Stage III-A.

Traffic
Control: Barricades, Temporary Pavement Marking, Signage and Flagmen

Note: If this Stage is done while the detour is still in effect for Stage II, then the pavement constructed through the Main Street intersection will have to be done ½ at a time using flagmen and high early strength concrete pavement.

Stage III-D Construct: Eastbound Pavement. Sta. 102 + 995±. To Sta. 103 + 095±.

Note: Temporary widening, built in Stage III-A, should be removed during this stage.

Traffic: Westbound traffic to remain in pattern of Stage III-C. Move Eastbound traffic onto newly constructed median pavement.

Traffic
Control: Barricades, Temporary Pavement Marking and signage; flagmen.

Note: It is desirable to wait until Stage II pavement is open to traffic, and the detour removed before this stage is built.

Stage III-E Construct: Median and Median Pavement. Sta. 102 + 913.915 to 102 + 995±.

Traffic: Move traffic to its ultimate pattern.

Traffic
Control: Barricades and Signage.

Also in Stage III Construct Port Clinton Road from pavement built in Stage II to end of Project on Port Clinton Road.

Stage III-A Construct Temporary Widening on north side of Port Clinton Road, Lt. Sta. 50 + 105± to Sta. 50 + 300.

Traffic: To remain on existing road.

Traffic
Control: Barricade and Signage.

Stage III-B Construct: EB Lane and Median Sta. 50 + 115± to Sta. 50 + 251.471.

Note: During this Stage it will be necessary to construct temporary widening in the SE radius return of the intersection of Port Clinton Road and Prairie Road.

Traffic: Move traffic onto newly constructed widening and north ½ of existing pavement.

Traffic Control: Barricades, Temporary Pavement Marking and Signage.

Stage III-C Construct EB Port Clinton Road Sta. 50 + 115± to Sta. 50 + 251.471.

Note: In this stage from Sta. 50 + 200 to Sta. 50 + 251.471 the working room is minimal. During the construction of this part of the Project, the Contractor must furnish flagmen to assist in the control of Traffic.

Traffic: WB Traffic to remain on widening built in Stage V-A; EB Traffic to be moved onto the new pavement built in Stage V-B.

Traffic Control: Barricades, Temporary Pavement Marking, Flagmen and Signage.

Stage III-D Construct: WB Port Clinton Road Sta. 50 + 90± to Sta. 50 + 115±.

Note: Before this Stage can be constructed, the Traffic must be off the existing north leg of Prairie Road (Stage II-C must be complete and traffic in Stage III-D pattern).

Traffic: Move Traffic onto EB lanes and median pavement.

Traffic Control: Barricades, Temporary Pavement Marker and Signage.

Stage III-E Construct: Median Pavement - Port Clinton Road Sta. 50 + 90± to Sta. 50 + 115±.

Traffic: Move WB Traffic on newly constructed WB lanes. EB Traffic to remain in EB lane.

Traffic Control: Barricades, Temporary Pavement Marking and Signage.

Also in Stage III Construct Prairie Road

Construct: Prairie Road Sta. 9 + 925 to Sta. 10 + 00 (½ at a time).

Traffic: Maintain traffic on Prairie road.

Traffic
Control: Barricades, temporary pavement marking, signage, and flag men.

This work shall be paid for at the contract Lump Sum price for TRAFFIC CONTROL AND PROTECTION which price shall include all traffic control devices and include the signage for the stages and detour shown in the plans.

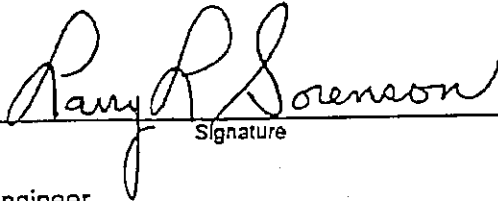


Route FAU 2657 Buffalo Grove Road
Section 93-00081-04-CH
County Lake, IL

Marked Buffalo Grove Road at Port Clinton/Prairie Rd
Project No. CMM-7003 (772)

This plan has been prepared to comply with the provisions of the NPDES Permit Number ILR10, issued by the Illinois Environmental Protection Agency for storm water discharges from Construction Site Activities.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.


Signature

Date

6/1/04

Project Engineer

Title

1. Site Description

- a. The following is a description of the construction activity which is the subject of this plan (use additional pages, as necessary):

The project is located at existing Port Clinton Road, from 506 feet west of Prairie Road to 251 feet east of Prairie Road. The project also encompasses Prairie Road from 75 feet south of existing Port Clinton Road to 336 feet north of existing Port Clinton Road.

Construction Descriptions:

The proposed improvement will consist of terminating Port Clinton Road from the west at Buffalo Grove Road. Buffalo Grove Road will be extended along the proposed alignment to Prairie Road at the project's north limit located 336 feet north of existing Port Clinton Road. Port Clinton Road from the east will also be realigned to a signalized "T"-intersection with proposed Buffalo Grove Road. The project improvement will consist of the construction of uniform four-lane roadways with turning lanes as indicated, new ditches, swales, and storm sewers. The proposed improvement also includes the removal of existing pavement on existing Port Clinton Road and existing Prairie Road.

Environmental Descriptions:

The National Wetlands Inventory does not identify any wetlands within the project limits. An isolated wetland located along the railroad tracks north of the project limits will be affected by the proposed project. However, computations developed by GEC show that after the project is completed approximately 95% of the prior flow to and through the wetland will remain. This is within the acceptable range of 85% to 150%.

- b. The following is a description of the intended sequence of major activities which will disturb soils for major portions of the construction site, such as grubbing, excavation and grading (use additional pages, as necessary):
The project has been scheduled to be built in four stages numbered I thru IV.

Stage I:

Grade and construct element of proposed roadways and sidewalks beyond existing alignment.
Cut and stabilize new ditches and swales and isolate them from the embankment area. Install ditch checks
Build proposed roadway embankment and stabilize.

Stage II:

Divert traffic per Detour Plan.
Remove existing roadway.
Clear and grub remaining right-of-way.
Cut and stabilize remaining ditch lengths and isolate from embankment area.
Place inlet and pipe protection.
Build proposed pavement and sidewalk.

Stage III:

Remove existing roadway.
Clear and grub remaining right-of-way.
Cut and stabilize ditch and isolate from embankment area.
Build proposed pavement and sidewalk.

Stage IV:

Remove existing roadway.
Clear and grub remaining right-of-way.
Cut and stabilize ditch and isolate from embankment area.
Build remaining proposed pavement and sidewalk.
Remove all temporary Erosions and sediment control measures when the Final Stabilization has occurred.

- c. The total area of the construction site is estimated to be 7.6 acres.

The total area of the site that it is estimated will be disturbed by excavation, grading or other activities is 7.6 acres. Disturbed areas are within the project construction limits adjusted for undisturbed areas within.

- d. The estimated runoff coefficients of the various areas of the site after construction activities are completed are contained in the project drainage study that is hereby incorporated by reference in this plan. Information describing the soils at the site is contained either in the Soils Report for the project, which is hereby incorporated by reference, or in an attachment to this plan.
- e. The design/project report, hydraulic report, or plan documents, hereby incorporated by reference, contain site map(s) indicating drainage patterns and approximate slopes anticipated after major grading activities, areas of major soil disturbance, the location of major structural and nonstructural controls identified in the plan, the location of areas where stabilization practices are expected to occur, surface waters (including wetlands), and locations where storm water is discharged to a surface water.
- f. The names of receiving water(s) and area extent of wetland acreage at the site are in the design/project report or plan documents that are incorporated by reference as a part of this plan.

2. Controls

This section of the plan addresses the various controls that will be implemented for each of the major construction activities described in 1.b. above. For each measure discussed, the contractor that will be responsible for its implementation is indicated. Each such contractor has signed the required certification on forms which are attached to, and a part of, this plan:

a. Erosion and Sediment Controls

- (i) Stabilization Practices. Provided below is a description of interim and permanent stabilization practices, including site-specific scheduling of the implementation of the practices. Site plans will ensure that existing vegetation is preserved where attainable and disturbed portions of the site will be stabilized. Stabilization practices may include: temporary seeding, permanent seeding, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, preservation of mature vegetation, and other appropriate measures. Except as provided in 2.a.(i).(A) and 2.b., stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, but in no case more than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased on all disturbed portions of the site where construction activity will not occur for a period of 21 or more calendar days.

- (A) Where the initiation of stabilization measures by the 14th day after construction activity temporarily or permanently ceases is precluded by snow cover, stabilization measures shall be initiated as soon as practicable thereafter.

Description of Stabilization Practices (use additional pages, as necessary):

1. Erosion Control Blankets – will be installed on all interior detention basin side slopes between normal water level and high water level.
2. Stabilization - Disturbed areas shall be stabilized with temporary or permanent measures within 14 calendar days. Approved areas of embankment having slopes greater than or equal to 3H:1V will be stabilized with sod, mat, or blanket in combination with seeding.

- (ii) **Structural Practices.** Provided below is a description of structural practices that will be implemented, to the degree attainable, to divert flows from exposed soils, store flows or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. Such practices may include silt fences, earth dikes, drainage swales, sediment traps, check dams, subsurface drains, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions and temporary or permanent sediment basins. The installation of these devices may be subject to Section 404 of the Clean Water Act.

Description of Structural Practices (use additional pages, as necessary):

1. Sediment Control, Stabilized Construction Access – A stabilized mat of aggregate underlain with a filter cloth shall be located at any point where traffic will be entering or exiting the construction site. Any sediment or soil reaching a public right-of-way, street, alley, or parking area shall be removed by scraping or street cleaning.
2. Inlet Filters – Inlet and pipe protection will be provided for storm sewers. These filters will be placed in every inlet, catch basin, or manhole with an open lid, which will drain water during at least a 10-yr storm event.
3. Perimeter Erosion Barrier – A perimeter erosion barrier (silt fence) will be placed adjacent to the areas of construction to intercept waterborne silt and prevent it from leaving the site. These areas are marked on the Erosion Control plans.
4. Sediment Control, Permanent Ditch Check – A permanent ditch check will be placed to restrict downstream flow velocity and enhance desired drainage patterns.

b. **Storm Water Management**

Provided below is a description of measures that will be installed during the construction process to control pollutants in storm water discharges that will occur after construction operations have been completed. The installation of these devices may be subject to Section 404 of the Clean Water Act.

- (i) Such practices may include: storm water detention structures (including wet ponds); storm water retention structures; flow attenuation by use of open vegetated swales and natural depressions; infiltration of runoff on site; and sequential systems (which combine several practices). The practices selected for implementation were determined on the basis of the technical guidance in Section 10-300 (Design Considerations) in Chapter 10 (Erosion and Sedimentation Control) of the Illinois Department of Transportation Drainage Manual. If practices other than those discussed in Section 10-300 are selected for implementation or if practices are applied to situations different from those covered in Section 10-300, the technical basis for such decisions will be explained below.

- (ii) Velocity dissipation devices will be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are maintained and protected (e.g., maintenance of hydrologic conditions, such as the hydroperiod and hydrodynamics present prior to the initiation of construction activities).

Description of Storm Water Management Controls (use additional pages, as necessary):

Permanent measures for storm water management controls will be placed as soon as possible during construction.

- a. All ditches will be vegetated, where feasible, which will provide a buffering effect for run-off contaminants.
- b. Ditches should receive permanent seeding after the final grading and topsoil have been placed.
- c. In turf areas where low maintenance seeding is required, native prairie grasses should be used in the final landscaping design.

c. Other Controls

- (i) Waste Disposal. No solid materials, including building materials, shall be discharged into Waters of the State, except as authorized by a Section 404 permit.
- (ii) The provisions of this plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.

d. Approved State or Local Plans

The management practices, controls and provisions contained in this plan will be in accordance with IDOT specifications, which are at least as protective as the requirements contained in the Illinois Environmental Protection Agency's Illinois Urban Manual, 1995. Procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials shall be described or incorporated by reference in the space provided below. Requirements specified in sediment and erosion site plans or site permits or storm water management site plans or site permits approved by local officials that are applicable to protecting surface water resources are, upon submittal of an NOI to be authorized to discharge under permit ILR10 incorporated by reference and are enforceable under this permit even if they are not specifically included in the plan.

Description of procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials:

3. Maintenance

The following is a description of procedures that will be used to maintain, in good and effective operating conditions, vegetation, erosion and sediment control measures and other protective measures identified in this plan (use additional pages, as necessary):

Construction equipment shall be stored and fueled only at designated locations. All necessary measures shall be taken to contain any fuel or pollution runoff in compliance with environmental law and EPA Water Quality Regulations. Leaking equipment or supplies shall be immediately repaired or removed from the site. The construction engineer on a weekly basis shall inspect the project to determine what erosion control efforts are in place and effective and if other control is necessary. Sediment collected during construction by the various temporary erosion systems shall be disposed on the site on a regular basis as directed by the Engineer.

All erosion and sediment control measures will be checked weekly and after each significant rainfall, 0.5 inch or greater in a 24-hour period. The following items will be checked:

1. Seeding – all erodible bare earth areas will be temporarily seeded and inspected on a weekly basis to minimize the amount of erodible surface within the contract limits.
2. Perimeter Erosion Barrier, silt fence, all types.
3. Erosion Control Blankets.
4. Ditch Checks.
5. Stabilized construction entrances.

All maintenance of the erosion control systems will be the responsibility of the contractor. All locations where vehicles enter and exit the construction site and all other areas subject to erosion should also be inspected periodically. Inspection of these areas shall be made at least once every seven days and within 24-hours of the end of each significant rainfall or equivalent snowfall.

4. Inspections

Qualified personnel shall inspect disturbed areas of the construction site which have not been finally stabilized, structural control measures, and locations where vehicles enter or exit the site. Such inspections shall be conducted at least once every seven (7) calendar days and within 24 hours of the end of a storm that is 0.5 inches or greater or equivalent snowfall.

- a. Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles enter or exit the site shall be inspected for evidence of off site sediment tracking.
- b. Based on the results of the inspection, the description of potential pollutant sources identified in section 1 above and pollution prevention measures identified in section 2 above shall be revised as appropriate as soon as practicable after such inspection. Any changes to this plan resulting from the required inspections shall be implemented within 7 calendar days following the inspection.
- c. A report summarizing the scope of the inspection, name(s) and qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of this storm water pollution prevention plan, and actions taken in accordance with section 4.b. shall be made and retained as part of the plan for at least three (3) years after the date of the inspection. The report shall be signed in accordance with Part VI. G of the general permit.
- d. If any violation of the provisions of this plan is identified during the conduct of the construction work covered by this plan, the Resident Engineer or Resident Technician shall complete and file an "Incidence of Noncompliance" (ION) report for the identified violation. The Resident Engineer or Resident Technician shall use forms provided by the Illinois Environmental Protection Agency and shall include specific information on the cause of noncompliance, actions which were taken to prevent any further causes of noncompliance, and a statement detailing any environmental impact which may have resulted from the noncompliance. All reports of noncompliance shall be signed by a responsible authority in accordance with Part VI. G of the general permit.

The report of noncompliance shall be mailed to the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Attn: Compliance Assurance Section
1021 North Grand East
Post Office Box 19276
Springfield, Illinois 62794-9276

5. Non-Storm Water Discharges

Except for flows from fire fighting activities, sources of non-storm water that is combined with storm water discharges associated with the industrial activity addressed in this plan must be described below. Appropriate pollution prevention measures, as described below, will be implemented for the non-storm water component(s) of the discharge. (Use additional pages as necessary to describe non-storm water discharges and applicable pollution control measures).

Dewatering activities may be a source of non-storm water discharge during construction. Contractors should discharge dewatering activities to a temporary settling basin surrounded by silt fence.

An additional source of non-storm water discharge during construction is the flurry from washing out redi-mix concrete trucks. Redi-mix concrete trucks should wash out in designated areas surrounded by silt fence. After all PCC items have been constructed, the dried concrete wash material should be cleaned up and properly disposed of. It will be the contractor's responsibility to secure these designated areas for the duration of their use. The Engineer must approve the locations.

On-site maintenance of equipment must be performed in accordance with environmental law, such as proper storage and no dumping of old engine oil or other fluids on site.

Good Housekeeping:

1. An effort will be made to store only enough product required to do the job.
2. All materials stored on-site will be stored in a neat, orderly manner in their appropriate containers, and if possible, under a roof or other enclosure.
3. Products will be kept in their original containers with the original manufacturer's label.
4. Substances will not be mixed with one another unless recommended by the manufacturer.
5. The site superintendent will inspect daily to ensure proper use and dispose of materials on the site.
6. Whenever possible, all of a product will be used up before disposing of the container.
7. Follow manufacturer's recommended practices for use and disposal.



Illinois Department of Transportation

Contractor Certification Statement

This certification statement is a part of the Storm Water Pollution Prevention Plan for the project described below, in accordance with NPDES Permit No. ILR10, issued by the Illinois Environmental Protection Agency on May 14, 1998.

Project Information:

Route _____
Section _____
County _____

Marked _____
Project No. _____

I certify under penalty of law that I understand the terms of the general National Pollutant Discharge Elimination System (NPDES) permit (ILR 10) that authorizes the storm water discharges associated with industrial activity from the construction site identified as part of this certification.

Signature

Date

Title

Name of Firm

Street Address

City State

Zip Code

Telephone Number

Disadvantaged Business Enterprise Participation

Effective: September 1, 2000
Revised: June 1, 2004

FEDERAL OBLIGATION. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR part 26 and listed in the DBE Directory or most recent addendum.

CONTRACTOR ASSURANCE. The Contractor makes the following assurance and agrees to include the assurance in each subcontract that the Contractor signs with a subcontractor:

The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of federally-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

OVERALL GOAL SET FOR THE DEPARTMENT. As a requirement of compliance with 49 CFR part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal applies to all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a good faith effort to achieve the overall goal. The dollar amount paid to all approved DBE firms performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR. This contract includes a specific DBE utilization goal established by the Department. The goal has been included because the Department has determined that the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. This determination is based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates that, in the absence of unlawful discrimination, and in an arena of fair and open competition, DBE companies can be expected to perform 16 % of the work. This percentage is set as the DBE participation goal for this contract. Consequently, in addition to the other award criteria established for this contract, the Department will award this contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set forth in this Special Provision:

- (a) The bidder documents that firmly committed DBE participation has been obtained to meet the goal; or

- (b) The bidder documents that a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

DBE LOCATOR REFERENCES. Bidders may consult the DBE Directory as a reference source for DBE companies certified by the Department. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217)785-4611, or by visiting the Department's web site at www.dot.state.il.us.

BIDDING PROCEDURES. Compliance with the bidding procedures of this Special Provision is required prior to the award of the contract and the failure of the as-read low bidder to comply will render the bid nonresponsive.

- (a) In order to assure the timely award of the contract, the as-read low bidder must submit a Disadvantaged Business Utilization Plan on Department form SBE 2026 within seven (7) working days after the date of letting. To meet the seven (7) day requirement, the bidder may send the Plan by certified mail or delivery service within the seven (7) working day period. If a question arises concerning the mailing date of a Plan, the mailing date will be established by the U.S. Postal Service postmark on the original certified mail receipt from the U.S. Postal Service or the receipt issued by a delivery service. It is the responsibility of the as-read low bidder to ensure that the postmark or receipt date is affixed within the seven (7) working days if the bidder intends to rely upon mailing or delivery to satisfy the submission day requirement. The Plan is to be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). It is the responsibility of the bidder to obtain confirmation of telefax delivery. The Department will not accept a Utilization Plan if it does not meet the seven (7) day submittal requirement, and the bid will be declared nonresponsive. In the event the bid is declared nonresponsive due to a failure to submit a Plan or failure to comply with the bidding procedures set forth herein, the Department may elect to cause the forfeiture of the penal sum of the bidder's proposal guaranty, and may deny authorization to bid the project if re-advertised for bids. The Department reserves the right to invite any other bidder to submit a Utilization Plan at any time for award consideration or to extend the time for award.
- (b) The Utilization Plan shall indicate that the bidder either has obtained sufficient DBE participation commitments to meet the contract goal or has not obtained enough DBE participation commitments in spite of a good faith effort to meet the goal. The Utilization Plan shall further provide the name, telephone number and telefax number of a responsible official of the bidder designated for purposes of notification of plan approval or disapproval under the procedures of this Special Provision.
- (c) The Utilization Plan shall include a DBE Participation Commitment Statement, Department form SBE 2025, for each DBE proposed for the performance of work to achieve the contract goal. The signatures on these forms must be original signatures. All elements of information indicated on the said form shall be provided, including but not limited to the following:

- (1) The name and address of each DBE to be used;
 - (2) A description, including pay item numbers, of the commercially useful work to be done by each DBE;
 - (3) The price to be paid to each DBE for the identified work specifically stating the quantity, unit price and total subcontract price for the work to be completed by the DBE. If partial pay items are to be performed by the DBE, indicate the portion of each item, a unit price where appropriate and the subcontract price amount;
 - (4) A commitment statement signed by the bidder and each DBE evidencing availability and intent to perform commercially useful work on the project; and
 - (5) If the bidder is a joint venture comprised of DBE firms and non-DBE firms, the plan must also include a clear identification of the portion of the work to be performed by the DBE partner(s).
- (d) The contract will not be awarded until the Utilization Plan submitted by the bidder is approved. The Utilization Plan will be approved by the Department if the Plan commits sufficient commercially useful DBE work performance to meet the contract goal. The Utilization Plan will not be approved by the Department if the Plan does not commit sufficient DBE performance to meet the contract goal unless the bidder documents that it made a good faith effort to meet the goal. The good faith procedures of Section VIII of this special provision apply. If the Utilization Plan is not approved because it is deficient in a technical matter, unless waived by the Department, the bidder will be notified and will be allowed no less than a five (5) working day period in order to cure the deficiency.

CALCULATING DBE PARTICIPATION. The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Department is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Department and Contractor are governed by the provisions of 49 CFR part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR part 26.55, the provisions of which govern over the summary contained herein.

- (a) DBE as the Contractor: 100% goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE firm does not count toward the DBE goals.
- (b) DBE as a joint venture Contractor: 100% goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.
- (c) DBE as a subcontractor: 100% goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies, excluding the purchase of materials and supplies or the lease of equipment by the DBE subcontractor

from the prime contractor or its affiliates. Work that a DBE subcontractor in turn subcontracts to a non-DBE firm does not count toward the DBE goal.

(d) DBE as a trucker: 100% goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed and insured by the DBE must be used on the contract. Credit will be given for the full value of all such DBE trucks operated using DBE employed drivers. Goal credit will be limited to the value of the reasonable fee or commission received by the DBE if trucks are leased from a non-DBE company.

(e) DBE as a material supplier:

(1) 60% goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.

(2) 100% goal credit for the cost of materials or supplies obtained from a DBE manufacturer.

(3) 100% credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a regular dealer or manufacturer.

GOOD FAITH EFFORT PROCEDURES. If the bidder cannot obtain sufficient DBE commitments to meet the contract goal, the bidder must document in the Utilization Plan the good faith efforts made in the attempt to meet the goal. This means that the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which could reasonably be expected to obtain sufficient DBE participation. The Department will consider the quality, quantity and intensity of the kinds of efforts that the bidder has made. Mere *pro forma* efforts are not good faith efforts; rather, the bidder is expected to have taken those efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

(a) The following is a list of types of action that the Department will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Department may be relevant in appropriate cases, and will be considered by the Department.

(1) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.

(2) Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.

- (3) Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
- (4) a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.
 - b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Prime contractors are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable.
- (5) Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The contractor's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the contractor's efforts to meet the project goal.
- (6) Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or contractor.
- (7) Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.
- (8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and Federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.
- (b) If the Department determines that the Contractor has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Department will award the contract provided that it is otherwise eligible for award. If the Department determines that a good faith effort has not been made, the Department will notify the bidder of that preliminary determination by contacting the responsible company official designated in the Utilization Plan. The preliminary determination shall include a statement of reasons why good faith efforts have not been found, and may include additional good faith efforts that the bidder could take. The notification will designate a

five (5) working day period during which the bidder shall take additional efforts. The bidder is not limited by a statement of additional efforts, but may take other action beyond any stated additional efforts in order to obtain additional DBE commitments. The bidder shall submit an amended Utilization Plan if additional DBE commitments to meet the contract goal are secured. If additional DBE commitments sufficient to meet the contract goal are not secured, the bidder shall report the final good faith efforts made in the time allotted. All additional efforts taken by the bidder will be considered as part of the bidder's good faith efforts. If the bidder is not able to meet the goal after taking additional efforts, the Department will make a pre-final determination of the good faith efforts of the bidder and will notify the designated responsible company official of the reasons for an adverse determination.

- (c) The bidder may request administrative reconsideration of a pre-final determination adverse to the bidder within the five (5) working days after the notification date of the determination by delivering the request to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217)785-1524). Deposit of the request in the United States mail on or before the fifth business day shall not be deemed delivery. The pre-final determination shall become final if a request is not made and delivered. A request may provide additional written documentation and/or argument concerning the issue of whether an adequate good faith effort was made to meet the contract goal. In addition, the request shall be considered a consent by the bidder to extend the time for award. The request will be forwarded to the Department's Reconsideration Officer. The Reconsideration Officer will extend an opportunity to the bidder to meet in person in order to consider all issues of whether the bidder made a good faith effort to meet the goal. After the review by the Reconsideration Officer, the bidder will be sent a written decision within ten (10) working days after receipt of the request for reconsideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Reconsideration Officer that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid nonresponsive.

CONTRACT COMPLIANCE. Compliance with this Special Provision is an essential part of the contract. The Department is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the contractor did not succeed in obtaining enough DBE participation to achieve the advertised contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall become the amended contract goal.

- (a) No amendment to the Utilization Plan may be made without prior written approval from the Department's Bureau of Small Business Enterprises. All requests for amendment to the Utilization Plan shall be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen

Parkway, Room 319, Springfield, Illinois 62764. Telephone number (217) 785-4611.
Telefax number (217) 785-1524.

- (b) All work indicated for performance by an approved DBE shall be performed, managed and supervised by the DBE executing the Participation Statement. The Contractor shall not terminate for convenience a DBE listed in the Utilization Plan and then perform the work of the terminated DBE with its own forces, those of an affiliate or those of another subcontractor, whether DBE or not, without first obtaining the written consent of the Bureau of Small Business Enterprises to amend the Utilization Plan. If a DBE listed in the Utilization Plan is terminated for reasons other than convenience, or fails to complete its work on the contract for any reason, the Contractor shall make good faith efforts to find another DBE to substitute for the terminated DBE. The good faith efforts shall be directed at finding another DBE to perform at least the same amount of work under the contract as the DBE that was terminated, but only to the extent needed to meet the contract goal or the amended contract goal. The Contractor shall notify the Bureau of Small Business Enterprises of any termination for reasons other than convenience, and shall obtain approval for inclusion of the substitute DBE in the Utilization Plan. If good faith efforts following a termination of a DBE for cause are not successful, the Contractor shall contact the Bureau and provide a full accounting of the efforts undertaken to obtain substitute DBE participation. The Bureau will evaluate the good faith efforts in light of all circumstances surrounding the performance status of the contract, and determine whether the contract goal should be amended.
- (c) The Contractor shall maintain a record of payments for work performed to the DBE participants. The records shall be made available to the Department for inspection upon request. After the performance of the final item of work or delivery of material by a DBE and final payment therefor to the DBE by the Contractor, but not later than thirty (30) calendar days after payment has been made by the Department to the Contractor for such work or material, the Contractor shall submit a DBE Payment Report on Department form SBE 2115 to the District Engineer. If full and final payment has not been made to the DBE, the Report shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or if the Contractor believes that the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Plan, the Department will deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages.
- (d) The Department reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.

Training Special Provisions

Effective: October 15, 1975

This Training Special Provision supersedes Section 7b of the Special Provision entitled "Specific Equal Employment Opportunity Responsibilities," and is in implementation of 23 U.S.C. 140(a).

As part of the contractor's equal employment opportunity affirmative action program, training shall be provided as follows:

The contractor shall provide on-the-job training aimed at developing full journeyman in the type of trade or job classification involved. The number of trainees to be trained under this contract will be 2. In the event the contractor subcontracts a portion of the contract work, he shall determine how many, if any, of the trainees are to be trained by the subcontractor, provided however, that the contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The contractor shall also insure that this Training Special Provision is made applicable to such subcontract. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training.

The number of trainees shall be distributed among the work classifications on the basis of the contractor's needs and the availability of journeymen in the various classifications within the reasonable area of recruitment. Prior to commencing construction, the contractor shall submit to the Illinois Department of Transportation for approval the number of trainees to be trained in each selected classification and training program to be used. Furthermore, the contractor shall specify the starting time for training in each of the classifications. The contractor will be credited for each trainee employed by him on the contract work who is currently enrolled or becomes enrolled in an approved program and will be reimbursed for such trainees as provided hereinafter.

Training and upgrading of minorities and women toward journeyman status is a primary objective of this Training Special Provision. Accordingly, the contractor shall make every effort to enroll minority trainees and women (e.g. by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees) to the extent such persons are available within a reasonable area of recruitment. The contractor will be responsible for demonstrating the steps that he has taken in pursuance thereof, prior to a determination as to whether the contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee in any classification in which he has successfully completed a training course leading to journeyman status or in which he has been employed as a journeyman. The contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used the contractor's records should document the findings in each case.

The minimum length and type of training for each classification will be as established in the training program selected by the contractor and approved by the Illinois Department of Transportation and the Federal Highway Administration. The Illinois Department of Transportation and the Federal Highway Administration shall approve a program, if it is reasonably calculated to meet the equal employment opportunity obligations of the contractor and to qualify the average trainee for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau and training programs approved by not necessarily sponsored by the U.S. Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training shall also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts. Approval or acceptance of a training program shall be

obtained from the State prior to commencing work on the classification covered by the program. It is the intention of these provisions that training is to be provided in the construction crafts rather than clerk-typists or secretarial-type positions. Training is permissible in lower level management positions such as office engineers, estimators, timekeepers, etc., where the training is oriented toward construction applications. Training in the laborer classification may be permitted provided that significant and meaningful training is provided and approved by the Illinois Department of Transportation and the Federal Highway Administration. Some offsite training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training.

Except as otherwise noted below, the contractor will be reimbursed 80 cents per hour of training given an employee on this contract in accordance with an approved training program. As approved by the Engineer, reimbursement will be made for training of persons in excess of the number specified herein. This reimbursement will be made even though the contractor receives additional training program funds from other sources, provided such other source does not specifically prohibit the contractor from receiving other reimbursement. Reimbursement for offsite training indicated above may only be made to the contractor where he does one or more of the following and the trainees are concurrently employed on a Federal-aid project; contributes to the cost of the training, provides the instruction to the trainee or pays the trainee's wages during the offsite training period.

No payment shall be made to the contractor if either the failure to provide the required training, or the failure to hire the trainee as a journeyman, is caused by the contractor and evidences a lack of good faith on the part of the contractor in meeting the requirement of this Training Special Provision. It is normally expected that a trainee will begin his training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project as long as training opportunities exist in his work classification or until he has completed his training program.

It is not required that all trainees be on board for the entire length of the contract. A contractor will have fulfilled his responsibilities under this Training Special Provision if he has provided acceptable training to the number of trainees specified. The number trained shall be determined on the basis of the total number enrolled on the contract for a significant period.

Trainees will be paid at least 60 percent of the appropriate minimum journeyman's rate specified in the contract for the first half of the training period, 75 percent for the third quarter of the training period, and 90 percent for the last quarter of the training period, unless apprentices or trainees in an approved existing program are enrolled as trainees on this project. In that case, the appropriate rates approved by the Departments of Labor or Transportation in connection with the existing program shall apply to all trainees being trained for the same classification who are covered by this Training Special Provision.

The contractor shall furnish the trainee a copy of the program he will follow in providing the training. The contractor shall provide each trainee with a certification showing the type and length of training satisfactorily complete.

The contractor will provide for the maintenance of records and furnish periodic reports documenting his performance under this Training Special Provision.

METHOD OF MEASUREMENT. The unit of measurement is in hours.

BASIS OF PAYMENT. This work will be paid for at the contract unit price of 80 cents per hour for TRAINEES. The estimated total number of hours, unit price and total price have been included in the schedule of prices.

Payments to Subcontractors

Effective: June 1, 2000

Revised: September 1, 2003

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts no later than 30 days from the receipt of each payment made to the Contractor.

State law addresses the timing of payments to be made to subcontractors. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, generally requires that when a Contractor receives any payment from the Department, the Contractor is required to make corresponding, proportional payments to each subcontractor performing work within 15 calendar days after receipt of the state payment. Section 7 of the State Prompt Payment Act further provides that interest in the amount of 2% per month, in addition to the payment due, shall be paid to any subcontractor by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

As progress payments are made to the Contractor in accordance with Article 109.07 of the Standard Specifications for Road and Bridge Construction, the Contractor shall make a corresponding partial payment within 15 calendar days to each subcontractor in proportion to the work satisfactorily completed by each subcontractor. The proportionate amount of partial payment due to each subcontractor shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors shall be paid in full within 15 calendar days after the subcontractor's work has been satisfactorily completed. The Contractor shall hold no retainage from the subcontractors.

This Special Provision does not create any rights in favor of any subcontractor against the State of Illinois or authorize any cause of action against the State of Illinois on account of any payment, nonpayment, delayed payment or interest claimed by application of the State Prompt Payment Act. The Department will neither determine the reasonableness of any cause for delay of payment nor enforce any claim to payment, including interest. Moreover, the Department will not approve any delay or postponement of the 15 day requirement. State law creates remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond in accordance with the Public Construction Bond Act, 30 ILCS 550.

Partial Payments

Effective: September 1, 2003

Revise Article 109.07 of the Standard Specifications to read:

"109.07 Partial Payments. Partial payments will be made as follows:

- (a) **Progress Payments.** At least once each month, the Engineer will make a written estimate of the amount of work performed in accordance with the contract, and the value thereof at the contract unit prices. The amount of the estimate approved as due for payment will be vouchered by the Department and presented to the State Comptroller for payment. No amount less than \$1000.00 will be approved for payment other than the final payment.

The failure to perform any requirement, obligation, or term of the contract by the Contractor shall be reason for withholding any progress payments until the Department determines that compliance has been achieved. Furthermore, progress payments may be reduced by liens filed pursuant to Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c).

- (b) **Material Allowances.** At the discretion of the Department, payment may be made for materials, prior to their use in the work, when satisfactory evidence is presented by the Contractor. Satisfactory evidence includes justification for the allowance (to expedite the work, meet project schedules, regional or national material shortages, etc.), documentation of material and transportation costs, and evidence that such material is properly stored on the project or at a secure location acceptable and accessible to the Department.

Material allowances will be considered only for nonperishable materials when the cost, including transportation, exceeds \$10,000 and such materials are not expected to be utilized within 60 days of the request for the allowance. For contracts valued under \$500,000, the minimum \$10,000 requirement may be met by combining the principal (material) product of no more than two contract items. An exception to this two item limitation may be considered for any contract regardless of value for items in which material (products) are similar except for type and/or size.

Material allowances shall not exceed the value of the contract items in which used and shall not include the cost of installation or related markups. Amounts paid by the Department for material allowances will be deducted from estimates due the Contractor as the material is used. Two-sided copies of the Contractor's cancelled checks for materials and transportation must be furnished to the Department within 60 days of payment of the allowances or the amounts will be reclaimed by the Department."

Authority of Railroad Engineer

Effective: July 1, 2004

Revise Article 105.02 of the Standard Specifications to read:

"105.02 Authority of Railroad Engineer. Whenever the safety of railroad traffic is concerned, the Railroad Engineer will have jurisdiction over safety measures to be taken and his/her decision as to the methods, procedures, and measures used shall be final, and any and all Contractors performing work near or about the railroad shall be governed by such decision. Instructions to the Contractor by the Railroad Engineer will be given through the Engineer. Work ordered as specified herein will be classified and paid for according to Article 104.02. Work performed for the Contractor's convenience will not be paid for separately but shall be considered as included in the contract."

RAILROAD PROTECTIVE LIABILITY INSURANCE

Effective: 12-1-86
Revised: 5-15-88

RAILROAD PROTECTIVE LIABILITY INSURANCE: The contractor will be required to carry Railroad Protective Liability and Property Damage Liability Insurance in accordance with Article 107.11 of the Standard Specifications. The limits of liability shall be in accordance with Article 107.11 of the Standard Specifications unless otherwise noted. A separate policy is required for each railroad indicated below unless otherwise noted.

<u>NAMED INSURED & ADDRESS</u>	<u>NUMBER & SPEED OF PASSENGER TRAINS</u>	<u>NUMBER & SPEED OF FREIGHT TRAINS</u>
Canadian National/ Illinois Central Railroad 17641 South Ashland Avenue Homewood, IL 60430-1345		16/day @25 mph

FOR FREIGHT/PASSENGER INFORMATION CONTACT: Tom Zeinz Phone: 708/332-3557
FOR INSURANCE INFORMATION CONTACT: Tom Zeinz Phone: 708/332-3557

Metra
547 West Jackson Blvd
Chicago, IL 60661

10/day
@60mph

FOR FREIGHT/PASSENGER INFORMATION CONTACT: Tony Ognibene Phone: 312/322-8006
FOR INSURANCE INFORMATION CONTACT: Kerry Brunette Phone: 312/322-6991

FOR FREIGHT/PASSENGER INFORMATION CONTACT: _____ Phone: _____
FOR INSURANCE INFORMATION CONTACT: _____ Phone: _____

Basis of Payment: The costs for providing insurance, as noted above, will be paid for at the contract unit price per Lump Sum for RAILROAD PROTECTIVE LIABILITY INSURANCE.

APPROVAL OF INSURANCE: The ORIGINAL and one CERTIFIED copy of each required policy shall be submitted to:

Engineer of Design and Environment
Illinois Department of Transportation
2300 S. Dirsken Parkway
Springfield, IL 62764

for approval. The contractor will be advised when approval of the insurance has been received from the railroad(s). Before any work begins on railroad right-of-way, the Contractor shall submit to the Resident Engineer evidence that the required railroad protective liability insurance has been approved by the railroad(s). The Contractor shall also provide the Resident Engineer with expiration date of each required policy.

Note: WISC Central is now owned by the Canadian National/ Illinois Central (CN/IC) Railroad

TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: April 1, 1992
Revised: January 1, 2003

To ensure a prompt response to incidents involving the integrity of work zone traffic control, the Contractor shall provide a telephone number where a responsible individual can be contacted 24 hours-a-day.

When the Engineer is notified, or determines a traffic control deficiency exists, he/she will notify and direct the Contractor to correct the deficiency within a specified time. The specified time, which begins upon notification to the Contractor, will be from 1/2 hour to 12 hours based upon the urgency of the situation and the nature of the deficiency. The Engineer shall be the sole judge.

The deficiency may be any lack of repair, maintenance or non-compliance with the traffic control plan.

If the Contractor fails to correct the deficiency within the specified time, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The calendar day(s) will begin with notification to the Contractor and end with the Engineer's acceptance of the correction. The daily monetary deduction will be either \$1,000 or 0.05 percent of the awarded contract value, whichever is greater.

In addition, if the Contractor fails to respond, the Engineer may correct the deficiency and the cost thereof will be deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities.

Weight Control Deficiency Deduction

Effective: April 1, 2001
Revised: August 1, 2002

The Contractor shall provide accurate weights of materials delivered to the contract for incorporation into the work (whether temporary or permanent) and for which the basis of payment is by weight. These weights shall be documented on delivery tickets which shall identify the source of the material, type of material, the date and time the material was loaded, the contract number, the net weight, the tare weight when applicable and the identification of the transporting vehicle. For aggregates, the Contractor shall have the driver of the vehicle furnish or establish an acceptable alternative to provide the contract number and a copy of the material order to the source for each load. The source is defined as that facility that produces the final material product that is to be incorporated into the contract pay items.

The Department will conduct random, independent vehicle weight checks for material sources according to the procedures outlined in the Documentation Section Policy Statement of the Department's Construction Manual and hereby incorporated by reference. The results of the independent weight checks shall be applicable to all contracts containing this Special Provision. Should the vehicle weight check for a source result in the net weight of material on the vehicle exceeding the net weight of material shown on the delivery ticket by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. No adjustment in pay quantity will be made. Should the vehicle weight check for a source result in the net weight of material shown on the delivery ticket exceeding the net weight of material on the vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. The Engineer will adjust the net weight shown on the delivery ticket to the checked delivered net weight as determined by the independent vehicle weight check.

The Engineer will also adjust the method of measurement for all contracts for subsequent deliveries of all materials from the source based on the independent weight check. The net weight of all materials delivered to all contracts containing this Special Provision from this source, for which the basis of payment is by weight, will be adjusted by applying a correction factor "A" as determined by the following formula:

$$A = 1.0 - \left(\frac{B - C}{B} \right); \text{ Where } A \leq 1.0; \left(\frac{B - C}{C} \right) > 0.50\% \text{ (0.70\% for aggregates)}$$

- Where
- A = Adjustment factor
 - B = Net weight shown on delivery ticket
 - C = Net weight determined from independent weight check

The adjustment factor will be applied as follows:

$$\text{Adjusted Net Weight} = A \times \text{Delivery Ticket Net Weight}$$

The adjustment factor will be imposed until the cause of the deficient weight is identified and corrected by the Contractor to the satisfaction of the Engineer. If the cause of the deficient weight is not identified and corrected within seven (7) calendar days, the source shall cease delivery of all materials to all contracts containing this Special Provision for which the basis of payment is by weight.

Should the Contractor elect to challenge the results of the independent weight check, the Engineer will continue to document the weight of material for which the adjustment factor would be applied. However, provided the Contractor furnishes the Engineer with written documentation that the source scale has been calibrated within seven (7) calendar days after the date of the independent weight check, adjustments in the weight of material paid for will not be applied unless the scale calibration demonstrates that the source scale was not within the specified Department of Agriculture tolerance.

At the Contractor's option, the vehicle may be weighed on a second independent Department of Agriculture certified scale to verify the accuracy of the scale used for the independent weight check.

Erosion and Sediment Control Deficiency Deduction

Effective: August 1, 2001
Revised: November 1, 2001

When the Engineer is notified or determines an erosion and/or sediment control deficiency(s) exists, he/she will direct the Contractor in writing to correct the deficiency. The Contractor shall then correct the deficiency within 24 hours. The deficiency may be any lack of repair, maintenance, or implementation of erosion and/or sediment control devices included in the contract, or any failure to comply with the conditions of the National Pollutant Discharge Elimination System (NPDES) Storm Water Permit for Construction Site Activities.

If the Contractor fails to correct the deficiency(s) within 24 hours, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The time period will begin with the initial written notification to the Contractor and end with the Engineer's acceptance of the corrected work. The per calendar day deduction will be either \$1000.00 or 0.05 percent of the awarded contract value, whichever is greater.

If the Contractor fails to respond, the Engineer may correct the deficiencies and deduct the cost from monies due or which may become due the Contractor. This corrective action shall in no way relieve the Contractor of his/her contractual requirements or responsibilities.

Subgrade Preparation

Effective: November 1, 2002

Revise the tenth paragraph of Article 301.03 of the Standard Specifications to read:

"Equipment of such weight, or used in such a way as to cause a rut in the finished subgrade of 13 mm (1/2 in.) or more in depth, shall be removed from the work or the rutting otherwise prevented."

Superpave Bituminous Concrete Mixtures

Effective: January 1, 2000
Revised: January 1, 2004

Description. This work shall consist of designing, producing and constructing Superpave bituminous concrete mixtures using Illinois Modified Strategic Highway Research Program (SHRP) Superpave criteria. This work shall be according to Sections 406 and 407 of the Standard Specifications and the special provision, "Quality Control/Quality Assurance of Bituminous Concrete Mixtures", except as follows.

Materials.

- (a) Fine Aggregate Blend Requirement. The Contractor may be required to provide FA 20 manufactured sand to meet the design requirements. For mixtures with $N_{design} \geq 90$, at least 50 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation.
- (b) Reclaimed Asphalt Pavement (RAP). If the Contractor is allowed to use more than 15 percent RAP, as specified in the plans, a softer performance-graded binder may be required as determined by the Engineer.

RAP shall meet the requirements of the special provision, "RAP for Use in Bituminous Concrete Mixtures".

RAP will not be permitted in mixtures containing polymer modifiers.

RAP containing steel slag will be permitted for use in top-lift surface mixtures only.

- (c) Bituminous Material. The asphalt cement (AC) shall be performance-graded (PG) or polymer modified performance-graded (SBS-PG or SBR-PG) meeting the requirements of Article 1009.05 of the Standard Specifications for the grade specified on the plans.

The following additional guidelines shall be used if a polymer modified asphalt is specified:

- (1) The polymer modified asphalt cement shall be shipped, maintained, and stored at the mix plant according to the manufacturer's requirements. Polymer modified asphalt cement shall be placed in an empty tank and shall not be blended with other asphalt cements.
- (2) The mixture shall be designed using a mixing temperature of $163 \pm 3^\circ\text{C}$ ($325 \pm 5^\circ\text{F}$) and a gyratory compaction temperature of $152 \pm 3^\circ\text{C}$ ($305 \pm 5^\circ\text{F}$).
- (3) Pneumatic-tired rollers will not be allowed unless otherwise specified by the Engineer. A vibratory roller meeting the requirements of Article 406.16 of the Standard Specifications shall be required in the absence of the pneumatic-tired roller.

- (4) A manufacturer's representative from the polymer asphalt cement producer shall be present during each polymer mixture start-up and shall be available at all times during production and lay-down of the mix.

Laboratory Equipment.

- (a) Superpave Gyratory Compactor. The superpave gyratory compactor (SGC) shall be used for all QC/QA testing.
- (b) Ignition Oven. The ignition oven shall be used to determine the AC content. The ignition oven shall also be used to recover aggregates for all required washed gradations.

The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

Mixture Design. The Contractor shall submit mix designs, for approval, for each required mixture. Mix designs shall be developed by Level III personnel who have successfully completed the course, "Superpave Mix Design Upgrade". Articles 406.10 and 406.13 of the Standard Specifications shall not apply. The mixtures shall be designed according to the respective Illinois Modified AASHTO references listed below.

AASHTO MP 2	Standard Specification for Superpave Volumetric Mix Design
AASHTO PP 2	Standard Practice for Short and Long Term Aging of Hot Mix Asphalt (HMA)
AASHTO PP 19	Standard Practice for Volumetric Analysis of Compacted Hot Mix Asphalt (HMA)
AASHTO PP 28	Standard Practice for Designing Superpave HMA
AASHTO T 209	Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
AASHTO T 312	Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the Superpave Gyratory Compactor
AASHTO T 308	Determining the Asphalt Content of Hot Mix Asphalt (HMA) by the Ignition Method

- (a) Mixture Composition. The ingredients of the bituminous mixture shall be combined in such proportions as to produce a mixture conforming to the composition limits by weight. The gradation mixture specified on the plans shall produce a mixture falling within the limits specified in Table 1.

TABLE 1. MIXTURE COMPOSITION (% PASSING) ^{1/}								
Sieve Size	IL-25.0 mm		IL-19.0 mm		IL-12.5 mm ^{4/}		IL-9.5 mm ^{4/}	
	min	max	min	max	min	max	min	max
37.5 mm (1 1/2 in.)		100						
25 mm (1 in.)	90	100		100				
19 mm (3/4 in.)		90	82	100		100		
12.5 mm (1/2 in.)	45	75	50	85	90	100		100
9.5 mm (3/8 in.)						90	90	100
4.75 mm (#4)	24	42 ^{2/}	24	50 ^{2/}	24	65	24	65
2.36 mm (#8)	16	31	16	36	16	48 ^{3/}	16	48 ^{3/}
1.18 mm (#16)	10	22	10	25	10	32	10	32
600 µm (#30)								
300 µm (#50)	4	12	4	12	4	15	4	15
150 µm (#100)	3	9	3	9	3	10	3	10
75 µm (#200)	3	6	3	6	4	6	4	6

1/ Based on percent of total aggregate weight.

2/ The mixture composition shall not exceed 40 percent passing the 4.75 mm (#4) sieve for binder courses with Ndesign ≥ 90.

3/ The mixture composition shall not exceed 40 percent passing the 2.36 mm (#8) sieve for surface courses with Ndesign ≥ 90.

4/ The mixture composition for surface courses shall be according to IL-12.5 mm or IL-9.5 mm, unless otherwise specified by the Engineer.

One of the above gradations shall be used for leveling binder as specified in the plans and according to Article 406.04 of the Standard Specifications.

It is recommended that the selected combined aggregate gradation not pass through the restricted zones specified in Illinois Modified AASHTO MP 2.

(b) Dust/AC Ratio for Superpave. The ratio of material passing the 75 µm (#200) sieve to total asphalt cement shall not exceed 1.0 for mixture design (based on total weight of mixture).

- (c) Volumetric Requirements. The target value for the air voids of the hot mix asphalt (HMA) shall be 4.0 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix and shall conform to the requirements listed in Table 2.

TABLE 2. VOLUMETRIC REQUIREMENTS					
Ndesign	Voids in the Mineral Aggregate (VMA), % minimum				Voids Filled with Asphalt (VFA), %
	IL-25.0	IL-19.0	IL-12.5	IL-9.5	
50	12.0	13.0	14.0	15	65 - 78
70					65 - 75
90					
105					

- (d) Determination of Need for Anti-Stripping Additive. The mixture designer shall determine if an additive is needed in the mix to prevent stripping. The determination will be made on the basis of tests performed according to Illinois Modified T 283 using 4 in. Marshall bricks. To be considered acceptable by the Department as a mixture not susceptible to stripping, the ratio of conditioned to unconditioned split tensile strengths (TSRs) shall be equal to or greater than 0.75. Mixtures, either with or without an additive, with TSRs less than 0.75 will be considered unacceptable.

If it is determined that an additive is required, the additive may be hydrated lime, slaked quicklime, or a liquid additive, at the Contractor's option. The liquid additive shall be selected from the Department's list of approved additives and may be limited to those which have exhibited satisfactory performance in similar mixes.

Dry hydrated lime shall be added at a rate of 1.0 to 1.5 percent by weight of total dry aggregate. Slurry shall be added in such quantity as to provide the required amount of hydrated lime solids by weight of total dry aggregate. The exact rate of application for all anti-stripping additives will be determined by the Department. The method of application shall be according to Article 406.12 of the Standard Specifications.

Personnel. The QC Manager and Level I Technician shall have successfully completed the Department's "Superpave Field Control Course".

Required Plant Tests. Testing shall be conducted to control the production of the bituminous mixture. The Contractor shall use the test methods identified to perform the following mixture tests at a frequency not less than that indicated in Table 3.

TABLE 3. REQUIRED PLANT TESTS for SUPERPAVE		
Parameter		Test Method
Asphalt Content by Ignition Oven		1 per half day of production
Air Voids	Bulk Specific Gravity of Gyratory Sample	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)
	Maximum Specific Gravity of Mixture	
		Illinois Modified AASHTO T 308
		Illinois Modified AASHTO T 312
		Illinois Modified AASHTO T 209

During production, the ratio of minus 75 μ m (#200) sieve material to total asphalt cement shall be not less than 0.6 nor more than 1.2 and the moisture content of the mixture at discharge from the mixer shall not exceed 0.5 percent. If at any time the ratio of minus 75 μ m (#200) material to asphalt or moisture content of the mixture falls outside the stated limits, production of the mix shall cease. The cause shall be determined and corrective action satisfactory to the Engineer shall be initiated prior to resuming production.

During production, mixtures containing an anti-stripping additive will be tested by the Department for stripping according to Illinois Modified T 283. If the mixture fails to meet the TSR criteria for acceptance, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria.

Construction Requirements

Lift Thickness.

- (a) Binder and Surface Courses. The minimum compacted lift thickness for constructing bituminous concrete binder and surface courses shall be according to Table 4:

TABLE 4 - MINIMUM COMPACTED LIFT THICKNESS	
Mixture	Thickness, mm (in.)
IL-9.5	32 (1 1/4)
IL-12.5	38 (1 1/2)
IL-19.0	57 (2 1/4)
IL-25.0	76 (3)

- (b) Leveling Binder. Mixtures used for leveling binder shall be as follows:

TABLE 5 - LEVELING BINDER	
Nominal, Compacted, Leveling Binder Thickness, mm (in.)	Mixture
≤ 32 (1 1/4)	IL-9.5
32 (1 1/4) to 50 (2)	IL 9.5 or IL-12.5

Density requirements shall apply for leveling binder when the nominal, compacted thickness is 32 mm (1 1/4 in.) or greater for IL-9.5 mixtures and 38 mm (1 1/2 in.) or greater for IL-12.5 mixtures.

- (c) Full-Depth Pavement. The compacted thickness of the initial lift of binder course shall be 100 mm (4 in.). The compacted thickness of succeeding lifts shall meet the minimums specified in Table 4 but not exceed 100 mm (4 in.).

If a vibratory roller is used for breakdown, the compacted thickness of the binder lifts, excluding the top lift, may be increased to 150 mm (6 in.) provided the required density is obtained.

- (d) Bituminous Patching. The minimum compacted lift thickness for constructing bituminous patches shall be according to Table 4.

Control Charts/Limits. Control charts/limits shall be according to QC/QA Class I requirements, except density shall be plotted on the control charts within the following control limits:

TABLE 6. DENSITY CONTROL LIMITS	
Parameter	Individual Test
Ndesign \geq 90	92.0 - 96.0%
Ndesign < 90	93 - 97%

Basis of Payment. On resurfacing projects, this work will be paid for at the contract unit price per metric ton (ton) for BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On resurfacing projects in which polymer modifiers are required, this work will be paid for at the contract unit price per metric ton (ton) for POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On full-depth pavement projects, this work will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE PAVEMENT, (FULL-DEPTH), SUPERPAVE, of the thickness specified.

On projects where widening is constructed and the entire pavement is then resurfaced, the binder for the widening will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition, Ndesign, and thickness specified. The surface and binder used to resurface the entire pavement will be paid for according to the paragraphs above for resurfacing projects.

RAP for Use in Bituminous Concrete Mixtures

Effective: January 1, 2000

Revised: April 1, 2002

Revise Article 1004.07 to read:

"1004.07 RAP Materials. RAP is reclaimed asphalt pavement resulting from cold milling or crushing of an existing dense graded hot-mix asphalt pavement. RAP must originate from routes or airfields under federal, state or local agency jurisdiction. The Contractor shall supply documentation that the RAP meets these requirements.

(a) Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. No additional RAP will be allowed on top of the pile after the pile has been sealed.

- (1) Homogeneous. Homogeneous RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only and represent the same aggregate quality, but shall be at least C quality or better, the same type of crushed aggregate (either crushed natural aggregate, ACBF slag, or steel slag), similar gradation and similar AC content. If approved by the Engineer, combined single pass surface/binder millings may be considered "homogenous", with a quality rating dictated by the lowest coarse aggregate quality present in the mixture. Homogenous stockpiles shall meet the requirements of Article 1004.07(d). Homogeneous RAP stockpiles not meeting these requirements may be processed (crushing and screening) and retested.
- (2) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only. The coarse aggregate in this RAP shall be crushed aggregate only and may represent more than one aggregate type and/or quality but shall be at least C quality or better. This RAP may have an inconsistent gradation and/or asphalt cement content prior to processing. All conglomerate RAP shall be processed prior to testing by crushing to where all RAP shall pass the 16 mm (5/8 in.) or smaller screen. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate RAP stockpiles shall meet the requirements of Article 1004.07(d).
- (3) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP containing coarse aggregate (crushed or round) that is at least D quality or better. This RAP may have an inconsistent gradation and/or asphalt content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate DQ RAP shall meet the requirements of Article 1004.07(d).

Reclaimed Superpave Low ESAL IL-9.5L surface mixtures shall only be placed in conglomerate DQ RAP stockpiles due to the potential for rounded aggregate.

- (4) Other. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Other". "Other" RAP stockpiles shall not be used in any of the Department's bituminous mixtures.

- (b) Use. The allowable use of a RAP stockpile shall be set by the lowest quality of coarse aggregate in the RAP stockpile. Class I/Superpave surface mixtures are designated as containing Class B quality coarse aggregate only. Superpave Low ESAL IL-19.0L binder and IL-9.5L surface mixtures are designated as Class C quality coarse aggregate only. Class I/Superpave binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate only. Bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate only. Any mixture not listed above shall have the designated quality determined by the Department.

RAP containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in Class I/Superpave (including Low ESAL) surface mixtures only. RAP stockpiles for use in Class I/Superpave mixtures (including Low ESAL), base course, base course widening and Class B mixtures shall be either homogeneous or conglomerate RAP stockpiles except conglomerate RAP stockpiles shall not be used in Superpave surface mixture Ndesign 50 or greater. RAP for use in bituminous aggregate mixtures (BAM) shoulders and BAM stabilized subbase shall be from homogeneous, conglomerate, or conglomerate DQ stockpiles.

Additionally, RAP used in Class I/Superpave surface mixtures shall originate from milled or crushed mixtures only, in which the coarse aggregate is of Class B quality or better. RAP stockpiles for use in Class I/Superpave (including Low ESAL) binder mixes as well as base course, base course widening and Class B mixtures shall originate from milled or processed surface mixture, binder mixture, or a combination of both mixtures uniformly blended to the satisfaction of the Engineer, in which the coarse aggregate is of Class C quality or better.

- (c) Contaminants. RAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.
- (d) Testing. All RAP shall be sampled and tested either during or after stockpiling.

For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 450 metric tons (500 tons) for the first 1800 metric tons (2,000 tons) and one sample per 1800 metric tons (2,000 tons) thereafter. A minimum of five tests shall be required for stockpiles less than 3600 metric tons (4,000 tons).

For testing existing stockpiles, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to extract representative samples throughout the pile for testing.

Before extraction, each field sample shall be split to test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

All of the extraction results shall be compiled and averaged for asphalt content and gradation. Individual extraction test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	Homogeneous / Conglomerate	Conglomerate "D" Quality
25 mm (1 in.)		± 5%
12.5 mm (1/2 in.)	± 8%	± 15%
4.75 mm (No. 4)	± 6%	± 13%
2.36 mm (No. 8)	± 5%	
1.18 mm (No. 16)		± 15%
600 μm (No. 30)	± 5%	
75 μm (No. 200)	± 2.0%	± 4.0%
AC	± 0.4%	± 0.5%

If more than 20 percent of the individual sieves are out of the gradation tolerances, or if more than 20 percent of the asphalt content test results fall outside the appropriate tolerances, the RAP will not be allowed to be used in the Department's bituminous concrete mixtures unless the RAP representing the failing tests is removed from the stockpile to the satisfaction of the Engineer. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

- (e) Designs. At the Contractor's option, bituminous concrete mixtures may be constructed utilizing RAP material meeting the above detailed requirements. The amount of RAP included in the mixture shall not exceed the percentages specified in the plans.

RAP designs shall be submitted for volumetric verification. If additional RAP stockpiles are tested and found that no more than 20 percent of the results, as defined under "Testing" herein, are outside of the control tolerances set for the original RAP stockpile and design, and meets all of the requirements herein, the additional RAP stockpiles may be used in the original mix design at the percent previously verified.

- (f) Production. The coarse aggregate in all RAP used shall be equal to or less than the nominal maximum size requirement for the bituminous mixture being produced.

To remove or reduce agglomerated material, a scalping screen, crushing unit or comparable sizing device approved by the Engineer shall be used in the RAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If the RAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP and either switch to the virgin aggregate design or submit a new RAP design.

Bituminous Concrete Surface Course

Effective: April 1, 2001
Revised: April 1, 2003

Replace the fourth paragraph of Article 406.23(b) of the Standard Specifications with the following:

"Mixture for cracks, joints, flangeways, leveling binder (machine method), leveling binder (hand method) and binder course in excess of 103 percent of the quantity specified by the Engineer will not be measured for payment.

Surface course mixture in excess of 103 percent of adjusted plan quantity will not be measured for payment. The adjusted plan quantity for surface course mixtures will be calculated as follows:

Adjusted Plan Quantity = C x quantity shown on the plans or as specified by the Engineer.

where C = metric: $C = \frac{G_{mb} \times 24.99}{U}$ English: $C = \frac{G_{mb} \times 46.8}{U}$

and where:

G_{mb} = average bulk specific gravity from approved mix design.

U = Unit weight of surface course shown on the plans in kg/sq m/25 mm (lb/sq yd/in.), used to estimate plan quantity.

24.99 = metric constant.

46.8 = English constant.

If project circumstances warrant a new surface course mix design, the above equations shall be used to calculate the adjusted plan quantity for each mix design using its respective average bulk specific gravity."

Coarse Aggregate for Trench Backfill, Backfill and Bedding

Effective: April 1, 2001
Revised: November 1, 2003

Revise Article 208.02 of the Standard Specifications to read:

"208.02 Materials. Materials shall be according to the following Articles of Section 1000 – Materials:

- (a) Fine Aggregate (Note 1) 1003.04
- (b) Coarse Aggregate (Note 2) 1004.06

Note 1. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 2. The coarse aggregate shall be wet to the satisfaction of the Engineer."

Revise the first sentence of the second paragraph of subparagraph (b) in Article 208.03 of the Standard Specifications to read:

"Any material meeting the requirements of Articles 1003.04 or 1004.06 which has been excavated from the trenches shall be used for backfilling the trenches."

Add the following to the end of Article 542.02 of the Standard Specifications:

- "(bb) Fine Aggregate (Note 1) 1003.04
- (cc) Coarse Aggregate (Note 2) 1004.06

Note 1. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 2. The coarse aggregate shall be wet to the satisfaction of the Engineer."

Revise the first and second sentences of the second paragraph of subparagraph (a) of Article 542.04 of the Standard Specifications to read:

"The unstable and unsuitable material shall be removed to a depth determined by the Engineer and for a width of one diameter (or equivalent diameter) of the pipe on each side of the pipe culvert, and replaced with aggregate. Rock shall be removed to an elevation 300 mm (1 ft) lower than the bottom of the pipe or to a depth equal to 40 mm/m (1/2 in./ft) of ultimate fill height over the top of the pipe culvert, whichever is the greater depth, and for a width as specified in (b) below, and replaced with aggregate."

Revise the second paragraph of subparagraph (c) of Article 542.04 of the Standard Specifications to read:

"Well compacted aggregate, at least 100 mm (4 in.) in depth below the pipe culvert, shall be placed the entire width of the trench and for the length of the pipe culvert, except well compacted impervious material shall be used for the outer 1 m (3 ft) at each end of the pipe."

When the trench has been widened by the removal and replacement of unstable or unsuitable material, the foundation material shall be placed for a width not less than the above specified widths on each side of the pipe. The aggregate and impervious material shall be approved by the Engineer and shall be compacted to the Engineer's satisfaction by mechanical means."

Revise subparagraph (e) of Article 542.04 of the Standard Specifications to read:

"(e) Backfilling. As soon as the condition of the pipe culvert will permit, the entire width of the trench shall be backfilled with aggregate to a height of at least the elevation of the center of the pipe. The aggregate shall be placed longitudinally along the pipe culvert, except at the outer 1 m (3 ft) at each end of the culvert which shall be backfilled with impervious material. The elevation of the backfill material on each side of the pipe shall be the same. The space under the pipe shall be completely filled. The aggregate and impervious material shall be placed in 200 mm (8 in.) layers, loose measurement. When using PVC, PE, or corrugated metal pipe, the aggregate shall be continued to a height of at least 300 mm (1 ft) above the top of the pipe and compacted to a minimum of 85 percent of standard lab density by mechanical means. When reinforced concrete pipes are used and the trench is within 600 mm (2 ft) of the pavement structure, the backfill shall be compacted to a minimum of 85 percent of standard lab density by mechanical means.

When using PVC, PE, or corrugated metal pipe a minimum of 300 mm (1 ft) of cover from the top of the pipe to the top of the subgrade will be required.

The installed pipe and its embedment shall not be disturbed when using movable trench boxes and shields, sheet pile, or other trench protection.

The remainder of the trench shall be backfilled with select material, from excavation or borrow, free from large or frozen lumps, clods or rock, meeting the approval of the Engineer. The material shall be placed in layers not exceeding 200 mm (8 in.) in depth, loose measurement and compacted to 95 percent of the standard laboratory density. Compaction shall be obtained by use of mechanical tampers or with approved vibratory compactors. Before compacting, each layer shall be wetted or dried to bring the moisture content within the limits of 80 to 110 percent of optimum moisture content determined according to AASHTO T 99 (Method C). All backfill material shall be deposited in the trench or excavation in such a manner as not to damage the culvert. The filling of the trench shall be carried on simultaneously on both sides of the pipe. The Contractor may, at his/her expense, backfill the entire trench with aggregate in lieu of select material. The aggregate shall be compacted to the satisfaction of the Engineer by mechanical means.

The backfill material for all trenches and excavations made in the subgrade of the proposed improvement, and for all trenches outside of the subgrade where the inner edge of the trench is within 600 mm (2 ft) of the edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder, or sidewalk shall be according to Section 208. The trench backfill material shall be compacted to a minimum of 85 percent of standard lab density by mechanical means.

The Contractor may, at his/her expense, backfill the entire trench with controlled low strength material meeting the approval of the Engineer.

When the trench has been widened for the removal and replacement of unstable or unsuitable material, the backfilling with aggregate and impervious material, will be required for a width of at least the specified widths on each side of the pipe. The remaining width of each layer may be

backfilled with select material. Each 200 mm (8 in.) layer for the entire trench width shall be completed before beginning the placement of the next layer."

Revise subparagraph (b) of Article 542.05 of the Standard Specifications to read:

"(b) Embankment. Embankment extending to an elevation of 300 mm (1 ft) over the top of the pipe shall be constructed according to Article 542.04(f), except the material up to the elevation of the center of the pipe and extending to a width of at least 450 mm (18 in.) on each side of the pipe, exclusive of the outer 1 m (3 ft) at each end of the pipe, shall consist of aggregate. At the outer 1 m (3 ft) at each end of the culvert, impervious material shall be used."

Add the following paragraph after the first paragraph of Article 542.10 of the Standard Specifications:

"Trench backfill will be measured for payment according to Article 208.03."

Add the following paragraph after the third paragraph of Article 542.11 of the Standard Specifications:

"Trench backfill will be paid for according to Article 208.04."

Add the following to of Article 550.02 of the Standard Specifications:

"(m) Fine Aggregate (Note 2).....	1003.04
"(n) Coarse Aggregate (Note 3)	1004.06

Note 2. The fine aggregate shall be moist to the satisfaction of the Engineer.

Note 3. The coarse aggregate shall be wet to the satisfaction of the Engineer."

Revise the first two sentences of the third paragraph of Article 550.04 of the Standard Specifications to read:

"Well compacted, aggregate bedding material at least 100 mm (4 in.) in depth below the pipe, shall be placed for the entire width of the trench and length of the pipe. The aggregate shall be compacted to the satisfaction of the Engineer by mechanical means."

Revise Article 550.07 of the Standard Specifications to read:

550.07 Backfilling. As soon as the condition of the pipe will permit, the entire width of the trench shall be backfilled with aggregate to a height of at least the elevation of the center of the pipe. The aggregate shall be placed longitudinally along the pipe. The elevation of the backfill material on each side of the pipe shall be the same. The space under the pipe shall be completely filled. The aggregate backfill material shall be placed in 200 mm (8 in.) layers, loose measurement and compacted to the satisfaction of the Engineer by mechanical means. When using PVC pipe, the aggregate shall be continued to a height of at least 300 mm (12 in.) above the top of the pipe.

The installed pipe and its embedment shall not be disturbed when using movable trench boxes and shields, sheet pile, or other trench protection.

The remainder of the trench and excavation shall be backfilled to the natural line or finished surface as rapidly as the condition of the sewer will permit. The backfill material shall consist of suitable excavated material from the trench or of trench backfill as herein specified. All backfill material shall be deposited in the trench or excavation in such a manner as not to damage the sewer and shall be compacted to the satisfaction of the Engineer by mechanical means. The filling of the trench shall be carried on simultaneously on both sides of the pipe.

The backfill material for trenches and excavation made in the subgrade of the proposed improvement, and for all trenches outside of the subgrade where the inner edge of the trench is within 600 mm (2 ft) of the edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder or sidewalk shall be according to Section 208. The backfill material shall be compacted to 85 percent of standard lab density by mechanical means.

All backfill material up to a height of 300 mm (1 ft) above the pipe shall be deposited in uniform layers not exceeding 200 mm (8 in.) thick, loose measurement. The material in each layer shall be compacted to the satisfaction of the Engineer by mechanical means. The backfilling above this height shall be done according to Method 1, 2 or 3 as described below, with the following exceptions.

When trench backfill or excavated material meeting the requirements of Section 208 is required above the first 300 mm (1 ft) of the pipe, the layers shall not exceed 200 mm (8 in.). Gradations CA6 or CA10 shall not be used with Method 2 or Method 3.

Method 1. The material shall be deposited in uniform layers not exceeding 300 mm (1 ft) thick, loose measurement, and each layer shall be compacted to the satisfaction of the Engineer by mechanical means.

Method 2. The material shall be deposited in uniform layers not exceeding 300 mm (1 ft) thick, loose measurement, and each layer shall be either inundated or deposited in water.

Method 3. The trench shall be backfilled with loose material, and settlement secured by introducing water through holes jetted into the backfill to a point approximately 600 mm (2 ft) above the top of the pipe. The holes shall be spaced as directed by the Engineer but shall be no farther than 2 m (6 ft) apart.

The water shall be injected at a pressure just sufficient to sink the holes at a moderate rate of speed. The pressure shall be such that the water will not cut cavities in the backfill material nor overflow the surface. If water does overflow the surface, it shall be drained into the jetted holes by means of shallow trenches.

Water shall be injected as long as it will be absorbed by the backfill material and until samples taken from test holes in the trench show a satisfactory moisture content. The Contractor shall bore the test holes not more than 15 m (50 ft) apart and at such other locations in the trench designated by the Engineer. As soon as the watersoaking has been completed, all holes shall be filled with soil and compacted by ramming with a tool approved by the Engineer.

Backfill material which has been watersoaked shall be allowed to settle and dry for at least 10 days before any surface course or pavement is constructed on it. The length of time may be altered, if deemed desirable, by the Engineer. Where the inner edge of the trench is within 600 mm (2 ft) of the

edge of the proposed pavement, curb, gutter, curb and gutter, stabilized shoulder or sidewalk, the provisions of this paragraph shall also apply.

At the end of the settling and drying period, the crusted top of the backfill material shall be scarified and, if necessary, sufficient backfill material added, as specified in Method 1, to complete the backfilling operations.

The method used for backfilling and compacting the backfill material shall be the choice of the Contractor. If the method used does not produce results satisfactory to the Engineer, the Contractor will be required to alter or change the method being used so the resultant backfill will be satisfactory to the Engineer. Should the Contractor be required to alter or change the method being used, no additional compensation will be allowed for altering or changing the method.

The Contractor may, at his/her expense, backfill the entire trench with controlled low strength material meeting the approval of the Engineer.

When sheeting and bracing have been used, sufficient bracing shall be left across the trench as the backfilling progresses to hold the sides firmly in place without caving or settlement. This bracing shall be removed as soon as practicable. Any depressions which may develop within the area involved in the construction operation due to settlement of the backfilling material shall be filled in a manner approved by the Engineer.

When the Contractor constructs the trench with sloped or benched sides according to Article 550.04, backfilling for the full width of the excavation shall be as specified, except no additional compensation will be allowed for trench backfill material required outside the vertical limits of the specified trench width.

Whenever excavation is made for installing sewer pipe across earth shoulders or private property, the topsoil disturbed by excavation operations shall be replaced as nearly as possible in its original position, and the whole area involved in the construction operations shall be left in a neat and presentable condition.

When using any PVC pipe, the pipe shall be backfilled with aggregate to 300 mm (1 ft) over the top of the pipe and compacted to a minimum of 85 percent of standard lab density by mechanical means.

When reinforced concrete pipes are used and the trench is within 600 mm (2 ft) of the pavement structure, the backfill shall be compacted to a minimum of 85 percent of standard lab density by mechanical means.

Deflection Testing for Storm Sewers. All PVC storm sewers will be tested for deflection not less than 30 days after the pipe is installed and the backfill compacted.

For PVC storm sewers with diameters 600 mm (24 in.) or smaller, a mandrel drag shall be used for deflection testing. For PVC storm sewers with diameters over 600 mm (24 in.), deflection measurements other than by a mandrel drag shall be used.

Where the mandrel is used, the mandrel shall be furnished by the Contractor and pulled by hand through the pipeline with a suitable rope or cable connected to each end. Winching or other means of forcing the deflection gauge through the pipeline will not be allowed.

The mandrel shall be of a shape similar to that of a true circle enabling the gauge to pass through a satisfactory pipeline with little or no resistance. The mandrel shall be of a design to prevent it from

tipping from side to side and to prevent debris build-up from occurring between the channels of the adjacent fins or legs during operation. Each end of the core of the mandrel shall have fasteners to which the pulling cables can be attached. The mandrel shall have 9, various sized fins or legs of appropriate dimension for various diameter pipes. Each fin or leg shall have a permanent marking that states its designated pipe size and percent of deflection allowable.

The outside diameter of the mandrel shall be 95 percent of the base inside diameter, where the base inside diameter is:

For all PVC pipe (as defined using ASTM D 3034 methodology):

If the pipe is found to have a deflection greater than specified, that pipe section shall be removed, replaced, and retested."

Revise subparagraph (c) of Article 1003.04 of the Standard Specifications to read:

"(c) Gradation. The fine aggregate gradation shall be as follows:

Backfill, bedding and trench backfill for pipe	
culverts and storm sewers	FA 1, FA 2, FA 6, or FA 21
Porous granular embankment and backfill, french drains,	
and sand backfill for underdrains	FA 1, FA 2, or FA20 (Note 1)

Note 1: For FA 1, FA 2, and FA 20 the percent passing the 75 μ m (No. 200) sieve shall be 2 ± 2 ."

Revise the title of Article 1004.06 of the Standard Specifications to read:

"Coarse Aggregate for Blotter, Embankment, Backfill, Trench Backfill, French Drains, and Bedding."

Add the following to the end of subparagraph (c) of Article 1004.06 of the Standard Specifications:

"Backfill, bedding, and trench backfill for pipe culverts
and storm sewers CA 6, CA 10, and CA 18"

Curb Ramps for Sidewalk

Effective: January 1, 2004

Description. This work shall consist of constructing sidewalk curb ramps with detectable warnings in compliance with the Americans with Disabilities Act, Accessibility Guidelines (ADAAG). Work shall be according to Section 424 of the Standard Specifications except as modified herein.

The detectable warnings shall consist of an area of truncated domes that provide both visual and tactile cues to pedestrians who are about to enter into traffic. The warning area shall begin 150 mm (6 in.) from the back of the curb and continue 600 mm (2 ft) in the direction of pedestrian travel for the entire width of the walking surface.

The detectable warnings shall also present a contrast in color from the adjacent sidewalk. This shall be accomplished by constructing the warning area, plus the 150 mm (6 in.) area between the warning area and the back of curb, out of concrete that is integrally colored red. However if the sidewalk is brick or of some dark color, the contrast requirement shall be achieved with normal (grey), Class SI concrete.

Materials. Materials for the detectable warning area of the curb ramps shall meet the following requirements.

- a) Integrally Colored Concrete. Integrally colored concrete shall be according to Section 1020 of the Standard Specification for Class SI concrete except as follows.

- | | |
|--------------------|---|
| Article 1020.04 | The allowable water/cement ratio range shall be 0.40 minimum to 0.44 maximum. |
| Article 1020.04 | The allowable slump range shall be 75 mm (3 in.) minimum to 125 mm (5 in.) maximum. |
| Article 1020.04 | The allowable coarse aggregate gradations shall be CA 11, CA 13, CA 14, and CA 16. |
| Article 1020.05(b) | A calcium chloride accelerating admixture shall not be used. |
| Article 1020.05(b) | The cement factor shall not be reduced if a water-reducing or high range water-reducing admixture is used. |
| Article 1020.05(c) | Fly ash shall not be used. |
| Article 1020.05(k) | Ground granulated blast-furnace slag shall not be used. |
| Article 1020.11 | Pigment for integrally colored concrete shall be added to the concrete and mixed per the Manufacturer's recommendation. |
| Article 1020.13 | The curing method shall be Type I membrane curing. |
| Article 1020.13. | The protection method shall be according to Article 1020.13(e)(1) and the protection period shall be 96 hours. No material, including |

the insulating material, shall be placed in direct contact with the concrete surface.

- (b) Pigment for Integrally Colored Concrete. The pigment shall meet the requirements of ASTM C 979, match color number 30166 of Federal Standard 595, and be on the Department's Approved List of Pigments for Integrally Colored Concrete.
- (c) Release Agent for Concrete Stamping Tools. The release agent shall be according to the stamping tool manufacturer's recommendations and the following: it shall be a clear liquid that will evaporate, it shall not harm the concrete, and it shall allow the application of Type I membrane curing.

Equipment. Equipment for the detectable warning area of the curb ramps shall meet the following requirements.

- (a) Concrete Stamps. Sufficient numbers and sizes of stamps shall be furnished to cover the various widths of the curb ramps. The stamps shall have an air opening at the top of each truncated dome recess; and shall be rigid enough to evenly distribute the force exerted during tamping.
- (b) Tamper. The tamper shall be according to the concrete stamp manufacturer's recommendations.

CONSTRUCTION REQUIREMENTS

Stamping. The concrete shall be placed and finished according to Article 424.06 except the area to be stamped shall not be brushed. When the bleed water has been absorbed, stamping shall begin. The entire width of the curb ramp shall be stamped at the same time. A single stamp or a combination of stamps may be used.

Prior to placing the stamp on the concrete, the stamp shall be coated with the release agent. When recommended by the manufacturer, the release agent shall also be applied to the concrete surface. Once the stamp has been placed on the ramp, it shall remain down until the stamping is complete.

The entire area of the stamp shall be tamped with a short, slow, repetitive action such that the concrete is caused to move up and into the dome recesses of the stamp. Tamping shall continue until mortar has come through the air openings in the stamp. Stepping or walking on the stamp will not be allowed. The base elevation of the domes shall be even with the adjacent sidewalk surface; the stamp shall not be forced down into the concrete.

When stamping is complete, the stamp shall be removed and the concrete cured.

Upon completion of curing, or after cold weather protection if required, the protruding mortar tip on the top of each dome shall be removed and the dome rubbed or ground smooth.

Adjusting Frames and Grates

Effective: August 1, 2001
Revised: November 1, 2001

Add the following to Article 602.02 of the Standard Specifications:

- "(k) High Density Polyethylene (HDPE) Plastic Note 2
(l) Recycled Rubber Note 3

Note 2. HDPE plastic adjusting rings may be used to adjust the frames and grates of drainage and utility structures up to a maximum of 75 mm (3 in.). They shall be installed and sealed underneath the frames according to the manufacturer's specifications.

HDPE plastic adjusting rings shall be manufactured from Class B HDPE plastic, as identified in ASTM D 1248, using the injection molding process. They shall be designed and tested to meet or exceed an HS25 wheel load according to the AASHTO Standard Specifications for Highway Bridges and shall be stabilized against the effects of ultra violet light.

Recycled material may be used. If recycled material is used, only polyethylene and less than two percent polypropylene will be allowed in the reclaim process. All feed stock shall be tested by the manufacturer on a procurement/production batch basis to verify the following property values:

Physical Property	Test Standard	Value
Melt Flow Index	ASTM D 1238	0.30 to 30.0 g/10 min (0.01 to 1.06 oz/10 min)
Specific Gravity	ASTM D 792	0.84 to 0.98
Tensile Strength, Yield	ASTM D 638	13,800 kPa (2000 psi) minimum

HDPE plastic adjusting rings shall have no void areas, cracks, or tears, and have no effects due to exposure to ultraviolet light. Ripples or sags are limited to less than ten percent of the surface. The actual diameter or length shall not vary more than 3 mm (0.125 in.) from the specified diameter or length. Variations in height are limited to ± 1.6 mm (0.063 in.) for parts up to 50 mm (2 in.) or ± 3 mm (0.125 in.) for parts from 50 mm (2 in.) to 75 mm (3 in.). Variations shall not exceed 6 mm (0.25 in.) from flat (dish, bow or convoluting edge) or 3 mm (0.125 in.) for bulges or dips in the surface.

Note 3. Riser rings fabricated from recycled rubber may be used to adjust the frames and grates of drainage and utility structures up to a maximum of 50 mm (2 in.). They shall be installed and sealed underneath the frames according to the manufacturer's specifications.

Recycled rubber products shall consist of no less than 80 percent by weight recycled rubber. The riser shall meet or exceed the following when maintained at $23 \pm 2^{\circ}\text{C}$ ($73 \pm 3^{\circ}\text{F}$) for at least 24 hours prior to and during testing.

Physical Property	Test Standard	Value
Density	ASTM C 642-90	1.10 ± 0.034 g/cu cm (68.63 ± 2.11 lb/cu ft)
Durometer Hardness	ASTM D 2240-97 Shore A	72 ± 6 ¹
Compression Deformation under 1000 kPa (145 psi)	ASTM D 575 – Test Method B Test of Specified Force	9 ± 4 %
Compression Set	ASTM D 395 – Illinois Modified Test Method B Compression Set under Constant Deflection in Air	5 ± 3 % ²
Weathering (70 hrs at 70 °C (158 °F)) Hardness retained	ASTM D 573	98 %, minimum
Freeze/thaw when exposed to deicing chemicals	ASTM C 672-91	3 % loss, maximum

¹ Average of three tests over a 28 mm (1.12 in.) diameter sample.

² Samples compressed to 75 percent of initial height.

Recycled rubber adjusting rings shall have no void areas, cracks, or tears, and have no effects due to exposure to ultraviolet light. The actual diameter or length shall not vary more than 3 mm (0.125 in.) from the specified diameter or length. Variations in height are limited to ± 1.6 mm (0.063 in.) for parts up to 50 mm (2 in.)."

Revise Article 603.08 of the Standard Specifications to read:

"603.08 Adjusting Rings. As an option to Articles 603.03 through 603.07, the adjustment of frames and grates may be accomplished through the use of adjusting rings that fit on top of the frame. These adjusting rings shall be fabricated as a one-piece assembly from gray iron, ductile iron or structural steel. They shall provide a structural capacity equal to or greater than the existing frame and shall not affect the opening size or surface appearance. The rings shall have a device for positively positioning and fastening the ring to the existing frame to prevent movement under traffic."

Flagger Vests

Effective: April 1, 2003

Revise the first sentence of Article 701.04(c)(1) of the Standard Specifications to read:

"The flagger shall be stationed to the satisfaction of the Engineer and be equipped with a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments and approved flagger traffic control signs conforming to Standard 702001 and Article 702.05(e)."

Revise Article 701.04(c)(6) of the Standard Specifications to read:

"(6) Nighttime Flagging. The flagger station shall be lit by additional overhead lighting other than streetlights. The flagger shall be equipped with a fluorescent orange or fluorescent orange and fluorescent yellow/green garment meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments."

Railroad, Full-actuated Controller and Cabinet

Effective: April 1, 2004

Description. Work shall be according to Section 857 of the Standard Specifications except as modified herein.

Revise the first sentence of the first paragraph of Article 857.04 of the Standard Specifications to read:

"This work will be paid for at the contract unit price each for FULL-ACTUATED CONTROLLER AND CABINET or RAILROAD, FULL-ACTUATED CONTROLLER AND CABINET of the type specified, which price shall include the conflict monitor, load switches and flasher relays."

Add the following paragraph after the first paragraph of Article 1073.01(c)(2) of the Standard Specifications:

"Railroad interconnected controllers shall provide for immediate track clearance green re-service upon receipt of each subsequent pre-empt demand. During this re-service all normal vehicle clearance intervals, including red revert, shall be respected. Pedestrian clearance during railroad pre-emption will be limited to a flashing don't walk interval in length to the vehicle yellow clearance interval and shall time concurrently with the yellow clearance."

Add the following to Article 1074.03(a)(5) of the Standard Specifications:

- "e. Railroad Interconnection. Railroad interconnected controllers and cabinets shall be fully tested and approved in the equipment suppliers facility prior to field installation. Three copies of the complete cabinet wiring showing all connections including railroad interconnect circuit shall be furnished.

Cabinets shall be equipped with a labeled test switch for the railroad interconnected pre-emption line which shall place a call in the controllers railroad pre-emption routine and also shall acknowledge power to the interconnect line. The switch shall resume to normal position upon release.

The terminal facility shall be wired so as to provide supervision of all essential pre-emption components. This wiring shall cause the facility to transfer to or remain in flashing operation in the event any critical component is missing, not connected or failed. The preemption interface relay shall be wired so as to be in the energized state during normal (non-pre-empt) operation. Each critical element such as controller harnesses and interface relays shall be wired to form a series loop which must be complete for normal operation.

A method of supervising the individually shielded three pair cable or individually braided three conductor cable, interconnecting the traffic and railroad facilities shall provide flashing operation during failed cable conditions. Upon detection of a failed railroad interconnect the controller shall provide one track clearance green interval and shall enter flashing operation at the end of track clearance red interval. Such flashing operation shall be manually reset. The supervision circuit shall be capable of detecting failure of the supervision circuit components themselves, and shall provide fail-safe operation upon such failure.

The interconnect to the railroad facility shall be such that demand for pre-emption begins when the railroad flasher begin to flash and ends when railroad gates begin to rise.

A Department approved method of controller security shall be implemented to assure data integrity and to preclude changes to critical data. The method shall include a means for the controller to continuously verify controller/cabinet Cyclical Redundancy Check (CRC) or Terminal and Facility (T&F) Signature match. The CRC or T&F Signature shall be developed based on preemptor entries, unit data (including phases in use, sequence and ring structure, etc.), overlap assignment and timing, firmware version, and any special memory content necessary to proper operation. Where data is stored in a data module or on a computer chip, a spare data module or computer chip shall be provided to the Engineer."

Public Convenience and Safety

Effective: January 1, 2000

Add the following paragraph after the fourth paragraph of Article 107.09 of the Standard Specifications:

"On weekends, excluding holidays, roadways with Average Daily Traffic of 25,000 or greater, all lanes shall be open to traffic from 3:00 P.M. Friday to midnight Sunday except where structure construction or major rehabilitation makes it impractical."

Transient Voltage Surge Suppression

Effective: August 1, 2003

Revise the first paragraph of Article 1074.03(a)(4) of the Standard Specifications to read:

"(4) Transient Voltage Surge Suppression. The cabinet shall be provided with transient voltage surge suppression. Transient surge suppression unit leads shall be kept as short as possible and ground shall be made directly to the cabinet wall or ground plate as near as possible to the object being grounded. All transient surge suppression units shall be tested and certified as meeting this specification by an independent testing laboratory. One copy of each of the full testing report shall be submitted to the Engineer."

Revise Article 1074.03(a)(4)a. of the Standard Specifications to read:

- "a. Surge Suppressor. The suppressor protecting the solid state controller, conflict monitor, and detection equipment shall consist of two stages: stage one which shall include a controller cabinet AC power protection assembly and stage two which shall include AC circuit protection.

The design of the stage one suppressor shall be modular and it shall be installed in such a way that it may be removed and replaced with the intersection under power and in flashing operation. It shall have a permanently mounted and wired base and a removable circuit package. The stage one suppressor shall have two LED failure indicators for power 'on' and suppression 'failure' and shall meet the following properties:

Stage One Suppressor	
Properties	Criteria
"Plug-in" suppression module	12 pin connector assembly
Clamp voltage	250 V at 20,000 A typical
Response time	Less than 5 nanoseconds
Maximum continuous service current	15 A at 120 VAC 60 Hz
High frequency noise attenuation	At least 50 dB at 100,000 Hz
Operating temperature	-40 °C (-40 °F) to 85 °C (185 °F)

If the controller assembly includes a system telemetry module or remote intersection monitor, the status of the stage one suppressor shall be continuously and remotely monitored by an appropriate alarm circuit.

The stage two, high speed, solid state, transient suppressor shall protect the system from transient over voltage without affecting power at the load. It shall suppress transients of either polarity and from either direction (source or load). The suppressor shall have a visual "on" indicator lamp when the unit is operating normally. It shall also have a UL plastic enclosure, a four position terminal strip for power connection, and it shall utilize silicon avalanche diode technology. The stage two suppressor shall meet the following properties:

Stage Two Suppressor	
Properties	Criteria
Nominal service voltage	120 V at 50/60 Hz
Maximum voltage protection level	± 330 V
Minimum voltage protection level	± 220 V $\pm 5\%$
Minimum surge current rating	700 A
Stand by power	Less than 0.5 Watts
Hot to neutral leakage current at 120 V RMS	Less than $5\mu\text{A}$
Maximum response time	5 nanoseconds
Operating and Storage temperature	-20 °C (-4 °F) to 50 °C (122 °F)"

Epoxy Coatings for Steel Reinforcement

Effective: April 1, 2003

Revise Article 1006.10(b)(2) of the Standard Specifications to read:

"(2) Epoxy Coated Reinforcement Bars. Epoxy coated reinforcement bars shall conform to the requirements of AASHTO M 284M (M 284), except:

- a. The maximum thickness of epoxy coating on spiral reinforcement, coated after fabrication, shall be 0.5 mm (20 mils).
- b. No more than eight of the holidays permitted shall be in any 300 mm (1 ft) of length for continuity of coating.

The epoxy coating applicator shall be certified under the Concrete Reinforcing Steel Institute's (CRSI) Epoxy Plant Certification Program.

The epoxy coater shall provide access for the Engineer at any time during production or shipping. Random bars may be checked at the epoxy coater's facility or the jobsite for coating uniformity, thickness and discontinuity; cracks on the bends; and other damaged areas. Upon request, the coater shall provide samples for testing by the Engineer.

Bars may be sheared or sawn to length after coating, provided end damage to coating does not extend more than 15 mm (1/2 in.) back and the cut end is patched before any visible oxidation appears. Flame cutting will not be permitted."

Add the following paragraph after the first paragraph of Article 1006.11(b) of the Standard Specifications:

"The epoxy coating applicator shall be certified under the Concrete Reinforcing Steel Institute's (CRSI) Epoxy Plant Certification Program."

Hand Vibrator

Effective: November 1, 2003

Add the following paragraph to Article 1103.17(a) of the Standard Specifications:

"The vibrator shall have a non-metallic head for areas containing epoxy coated reinforcement. The head shall be coated by the manufacturer. The hardness of the non-metallic head shall be less than the epoxy coated reinforcement, resulting in no damage to the epoxy coating. Slip-on covers will not be allowed."

Working Days

Effective: January 1, 2002

The Contractor shall complete the work within 115 working days.

Light Emitting Diode (LED) Signal Head

Effective: April 1, 2002
Revised: August 1, 2003

Add the following paragraph to the end of Article 802.03 of the Standard Specifications:

"The warranty for light emitting diode (LED) modules, including the maintained minimum luminous intensities, shall cover a minimum of 60 months from the date of delivery."

Revise Article 880.01 of the Standard Specifications to read:

"880.01 Description. This work shall consist of furnishing and installing a conventional signal head, optically programmed signal head or light emitting diode (LED) signal head."

Revise Article 880.02(a) of the Standard Specifications to read:

"(a) Signal Heads.....1078.01"

Revise the first sentence of the first paragraph of Article 880.03 of the Standard Specifications to read:

"The signal head shall be installed on a post, bracket, span wire or mast arm as shown on the plans."

Revise the first paragraph of Article 880.04 of the Standard Specifications to read:

"880.04 Basis of Payment. This work will be paid for at the contract unit price each for SIGNAL HEAD, OPTICALLY PROGRAMMED SIGNAL HEAD, or SIGNAL HEAD, LED of the type specified and of the material type when specified."

Revise Article 1078.01 of the Standard Specifications to read:

"1078.01 Signal Head, Optically Programmed Signal Head and Light Emitting Diode (LED) Signal Head."

Add the following to Article 1078.01(c) of the Standard Specifications:

"(3) The LED signal section shall be according to the following:

- a. General Requirements. The LED signal head shall meet the requirements of the Institute of Transportation Engineers (ITE) interim LED purchase specification, "Vehicle Traffic Control Signal Heads, Part 2: LED Vehicle Traffic Signal Modules", or applicable successor ITE specifications, except as modified herein. The LEDs utilized in the modules shall not be Aluminum Gallium Arsenide (AlGaAs) material technology.
- b. Physical and Mechanical Requirements. The power supply for the LED module shall be integrated with the unit.

- c. Photometric Requirements. The candlepower values for yellow 300 mm (12 in.) circular modules shall be equal to the corresponding values for green 300 mm (12 in.) circular modules as listed in Table 1 of Section 4 of the aforementioned ITE specification based on normal use in traffic signal operation over the operating temperature range.

The illuminated portion of the arrow module shall be uniformly and completely dispersed with the LEDs.

- d. Electrical Requirements. When applicable to the particular module type, the LED signal module shall be EPA Energy Star qualified. For yellow 300 mm (12 in.) circular and arrow modules, the wattage requirements shall be as follows:

Module Type	Maximum Watts (W) at 74 °C (165 °F)	Nominal Watts (W) at 25 °C (77 °F)
300 mm (12 in.) Yellow Circular	25	22
300 mm (12 in.) Yellow Arrow	12	10

The individual LEDs shall be wired such that a catastrophic loss or the failure of one LED will result in the loss of not more than 5 percent of the signal module light output.

- e. Warranty. The LED modules shall be warrantied according to Article 802.03. The maintained minimum intensities for 300 mm (12 in.) arrow modules throughout the warranty period under the operating temperature and voltage range, and at the end of the warranty period shall not be less than the following values:

Module Type	Maintained Minimum Intensities (cd/sq m)
Red Arrow	5,000
Yellow Arrow	11,000
Green Arrow	11,000"

Freeze-Thaw Rating

Effective: November 1, 2002

Revise the first sentence of Article 1004.02(f) of the Standard Specifications to read:

"When coarse aggregate is used to produce portland cement concrete for base course, base course widening, pavement, driveway pavement, sidewalk, shoulders, curb, gutter, combination curb and gutter, median, paved ditch or their repair using concrete, the gradation permitted will be determined from the results of the Department's Freeze-Thaw Test."

Traffic Structures

Effective: November 1, 2002

Add the following sentence to the end of the first paragraph of Article 1069.01(a)(1) of the Standard Specifications:

"Light poles shall be designed for 145 km/hr (90 mph) wind velocity and a minimum design life of 50 years."

Add the following sentence to the end of the third paragraph of Article 1069.04(a) of the Standard Specifications:

"Light towers shall be designed for 145 km/hr (90 mph) wind velocity and a minimum design life of 50 years."

Revise the last sentence of the first paragraph of Article 1077.03(a)(1) of the Standard Specifications to read:

"The design shall be according to AASHTO "Standard Specification for Structural Supports for Highway Signs, Luminaries and Traffic Signals" 1994 Edition for 130 km/hr (80 mph) wind velocity. However the arm-to-pole connection shall be according to the "ring plate" detail as shown in Figure 11-1(f) of the 2002 Interim, to the AASHTO "Standard Specification for Structural Supports for Highway Signs, Luminaries and Traffic Signals" 2001 4th Edition."

Temporary Erosion Control

Effective: November 1, 2002

Revise the fifth sentence of the third paragraph of Article 280.04(a) of the Standard Specifications to read:

"This work may be constructed of hay or straw bales, extruded UV resistant high density polyethylene panels, erosion control blanket, mulch barrier, aggregate barriers, excavation, seeding, or mulch used separately or in combination, as approved, by the Engineer."

Add the following paragraphs after the fifth paragraph of Article 280.04(a) of the Standard Specifications.

"A ditch check constructed of extruded, UV resistant, high density polyethylene panels, "M" pins and erosion control blanket shall consist of the following materials:

Extruded, UV resistant, high density polyethylene panels shall have a minimum height of 250 mm (10 in.) and minimum length of 1.0 m (39.4 in.). The panels shall have a 51 mm (2 in.) lip along the bottom of the panel. Each panel shall have a single rib thickness of 4 mm (5/32 in.) with a 12 mm (1/2 in.) distance between the ribs. The panels shall have an average apparent opening size equal to 4.75 mm (No. 4) sieve, with an average of 30 percent open area. The tensile strength of each panel shall be 26.27 kN/m (1800 lb/ft) in the machine direction and 7.3 kN/m (500 lb/ft) in the transverse direction when tested according to ASTM D 4595.

"M" pins shall be at least 76 mm (3 in.) by 686 mm (27 in.), constructed out of deformed grade C1008 D3.5 rod (0.211 in. diameter). The rod shall have a minimum tensile strength of 55 MPa (8000 psi).

Erosion control blanket shall conform to Article 251.04.

A section of erosion control blanket shall be placed transverse to the flowline direction of the ditch prior to the construction of the polyethylene ditch check. The length of the section shall extend from the top of one side of the ditch to the top of the opposite side of the ditch, while the width of the section shall be one roll width of the blanket. The upstream edge of the erosion control blanket shall be secured in a 100 mm (4 in.) trench. The blanket shall be secured in the trench with 200 mm (8 in.) staples placed at 300 mm (1 ft) intervals along the edge before the trench is backfilled. Once the upstream edge of the blanket is secured, the downstream edge shall be secured with 200 mm (8 in.) staples placed at 300 mm (1 ft) intervals along the edge. The polyethylene ditch check shall be installed in the middle of the erosion control blanket, with the lip of each panel facing outward.

The ditch check shall consist of two panels placed back to back forming a single row. Placement of the first two panels shall be at the toe of the backslope or sideslope, with the panels extending across the bottom of the ditch. Subsequent panels shall extend both across the bottom of the ditch and up the opposite sideslope, as well as up the original backslope or sideslope at the distance determined by the Engineer.

The M pins shall be driven through the panel lips to secure the panels to the ground. M pins shall be installed in the center of the panels with adjacent panels overlapping the ends a minimum of 50 mm (2 in.). The pins shall be placed through both sets of panels at each overlap. They shall be installed at an interval of three M pins per one meter (39 in.) length of ditch check. The panels shall be wedged into the M pins at the top to ensure firm contact between the entire bottom of the panels and the soil."

Epoxy Coating on Reinforcement

Effective: April 1, 1997
Revised: January 1, 2003

For work outside the limits of bridge approach pavement, all references to epoxy coating in the Highway Standards and Standard Specifications for reinforcement; tie bars and chair supports will not apply for pavement, shoulders, curb, gutter, combination curb and gutter and median.

Work Zone Traffic Control Devices

Effective: January 1, 2003
Revised: April 1, 2003

Add the following to Article 702.01 of the Standard Specifications:

"All devices and combinations of devices shall meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350 for their respective categories. The categories are as follows:

Category 1 includes small, lightweight, channelizing and delineating devices that have been in common use for many years and are known to be crashworthy by crash testing of similar devices or years of demonstrable safe performance. These include cones, tubular markers, flexible delineators and plastic drums with no attachments. Category 1 devices shall be crash tested and accepted or may be self-certified by the manufacturer.

Category 2 includes devices that are not expected to produce significant vehicular velocity change but may otherwise be hazardous. These include drums and vertical panels with lights, barricades and portable sign supports. Category 2 devices shall be crash tested and accepted for Test Level 3.

Category 3 includes devices that are expected to cause significant velocity changes or other potentially harmful reactions to impacting vehicles. These include crash cushions, truck mounted attenuators and other devices not meeting the definitions of Category 1 or 2. Category 3 devices shall be crash tested and accepted for Test Level 3.

Category 4 includes portable or trailer-mounted devices such as arrow boards, changeable message signs, temporary traffic signals and area lighting supports. Currently, there is no implementation date set for this category and it is exempt from the NCHRP 350 compliance requirement.

The Contractor shall provide a manufacturer's self-certification letter for each Category 1 device and an FHWA acceptance letter for each Category 2 and Category 3 device used on the contract. The letters shall state the device meets the NCHRP 350 requirements for its respective category and test level, and shall include a detail drawing of the device."

Delete the third, fourth and fifth paragraphs of Article 702.03(b) of the Standard Specifications.

Delete the third sentence of the first paragraph of Article 702.03(c) of the Standard Specifications.

Delete the fourth paragraph of Article 702.05(a) of the Standard Specifications.

Revise the sixth paragraph of Article 702.05(a) of the Standard Specifications to read:

"When the work operations exceed four days, all signs shall be post mounted unless the signs are located on the pavement or define a moving or intermittent operation. When approved by the Engineer, a temporary sign stand may be used to support a sign at 1.2 m (5 ft) minimum where posts are impractical. Longitudinal dimensions shown on the plans for the placement of signs may be increased up to 30 m (100 ft) to avoid obstacles, hazards or to improve sight distance, when approved by the Engineer. "ROAD CONSTRUCTION AHEAD" signs will also be required on side roads located within the limits of the mainline "ROAD CONSTRUCTION AHEAD" signs."

Delete all references to "Type 1A barricades" and "wing barricades" throughout Section 702 of the Standard Specifications.

Fluorescent Orange Sheeting on Drums

Effective: November 1, 2000

Revised: January 1, 2003

Revise the first sentence of the first paragraph of Article 702.03(e) of the Standard Specifications to read:

"Drums shall be nonmetallic and have alternating reflectorized Type AA or Type AP fluorescent orange and reflectorized white horizontal, circumferential stripes."

Vertical Barricades

Effective: November 1, 2002
Revised: January 1, 2003

Add the following to Article 702.03 of the Standard Specifications:

"(h) Vertical Barricades. Vertical Barricades shall meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350 and the special provision "Work Zone Traffic Control Devices". Vertical barricades may be used in lieu of cones, drums or Type I and Type II barricades to channelize traffic. Vertical barricades shall not be used in lane closure tapers."

Concrete Admixtures

Effective: January 1, 2003
Revised: January 1, 2004

Revise Article 1020.05(b) of the Standard Specifications to read:

- "(b) Admixtures. Except as specified, the use of admixtures to increase the workability or to accelerate the hardening of the concrete will be permitted only when approved in writing by the Engineer. The Department will maintain an Approved List of Concrete Admixtures. When the Department permits the use of a calcium chloride accelerator, it shall be according to Article 442.02, Note 5.

When the atmosphere or concrete temperature is 18 °C (65 °F) or higher, a retarding admixture meeting the requirements of Article 1021.03 shall be used in the Class BD Concrete and portland cement concrete bridge deck overlays. The amount of retarding admixture to be used will be determined by the Engineer. The proportions of the ingredients of the concrete shall be the same as without the retarding admixture except that the amount of mixing water shall be reduced, as may be necessary, in order to maintain the consistency of the concrete as required. In addition, a high range water-reducing admixture shall be used in Class BD Concrete. The amount of high range water-reducing admixture will be determined by the Engineer. At the option of the Contractor, a water-reducing admixture may be used. Type I cement shall be used.

For Class PC and PS Concrete, a retarding admixture may be added to the concrete mixture when the concrete temperature is 18 °C (65 °F) or higher. The Engineer may order or permit the use of a retarding or water-reducing admixture whenever the Engineer considers it appropriate.

At the Contractor's option, admixtures in addition to an air-entraining admixture may be used for Class PP-1 concrete. The accelerator shall be the non-chloride type. If a water-reducing or retarding admixture is used, the cement factor may be reduced a maximum 18 kg/cu m (0.30 hundredweight/cu yd). If a high range water-reducing admixture is used, the cement factor may be reduced a maximum 36 kg/cu m (0.60 hundredweight/cu yd). Cement factor reductions shall not be cumulative when using multiple admixtures. An accelerator shall always be added prior to a high range water-reducing admixture, if both are used.

If Class C fly ash or ground granulated blast-furnace slag is used in Class PP-1 concrete, a water-reducing or high range water-reducing admixture shall be used. However, the cement factor shall not be reduced if a water-reducing, retarding, or high range water-reducing admixture is used. In addition, an accelerator shall not be used.

For Class PP-2 or PP-3 concrete, a non-chloride accelerator followed by a high range water-reducing admixture shall be used, in addition to the air-entraining admixture. For Class PP-3 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-2 or PP-3 concrete, the Contractor has the option to use a water-reducing admixture. A retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

When the air temperature is less than 13 °C (55 °F) for Class PP-1 or PP-2 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-4 concrete, a high range water-reducing admixture shall be used in addition to the air-entraining admixture. The Contractor has the option to use a water-reducing admixture. An accelerator shall not be used. For stationary or truck mixed concrete, a retarding admixture shall be used to allow for haul time. The Contractor has the option to use a mobile portland cement concrete plant according to Article 1103.04, but a retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

If the Department specifies a calcium chloride accelerator for Class PP-1 concrete, the maximum chloride dosage shall be 1.0 L (1.0 quart) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.0 L (2.0 quarts) per 45 kg (100 lb) of cement if approved by the Engineer. If the Department specifies a calcium chloride accelerator for Class PP-2 concrete, the maximum chloride dosage shall be 1.3 L (1.3 quarts) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.6 L (2.6 quarts) per 45 kg (100 lb) of cement if approved by the Engineer.

For Class PV, MS, SI, RR, SC and SH concrete, at the option of the Contractor, or when specified by the Engineer, a water-reducing admixture or a retarding admixture may be used. The amount of water-reducing admixture or retarding admixture permitted will be determined by the Engineer. The air-entraining admixture and other admixtures shall be added to the concrete separately, and shall be permitted to intermingle only after they have separately entered the concrete batch. The sequence, method and equipment for adding the admixtures shall be approved by the Engineer. The water-reducing admixture shall not delay the initial set of the concrete by more than one hour. Type I cement shall be used.

When a water-reducing admixture is added, a cement factor reduction of up to 18 kg/cu m (0.30 hundredweight/cu yd), from the concrete designed for a specific slump without the admixture, will be permitted for Class PV, MS, SI, RR, SC and SH concrete. When an approved high range water-reducing admixture is used, a cement factor reduction of up to 36 kg/cu m (0.60 hundredweight/cu yd), from a specific water cement/ratio without the admixture, will be permitted based on a 14 percent minimum water reduction. This is applicable to Class PV, MS, SI, RR, SC and SH concrete. A cement factor below 320 kg/cu m (5.35 hundredweight/cu yd) will not be permitted for Class PV, MS, SI, RR, SC and SH concrete. A cement factor reduction will not be allowed for concrete placed underwater. Cement factor reductions shall not be cumulative when using multiple admixtures.

For use of admixtures to control concrete temperature, refer to Articles 1020.14(a) and 1020.14(b).

The maximum slumps given in Table 1 may be increased to 175 mm (7 in.) when a high range water-reducing admixture is used for all classes of concrete except Class PV and PP."

Revise Section 1021 of the Standard Specifications to read:

"SECTION 1021. CONCRETE ADMIXTURES

1021.01 General. Admixtures shall be furnished in liquid form ready for use. The admixtures may be delivered in the manufacturer's original containers, bulk tank trucks or such containers or tanks as are acceptable to the Engineer. Delivery shall be accompanied by a ticket which clearly identifies the manufacturer and trade name of the material. In all cases, containers shall be readily identifiable to the satisfaction of the Engineer as to manufacturer and trade name of the material they contain.

Prior to inclusion of a product on the Department's Approved List of Concrete Admixtures, the manufacturer shall submit a report prepared by an independent laboratory accredited by the AASHTO Accreditation Program. The report shall show the results of physical tests conducted no more than five years prior to the time of submittal, according to applicable specifications.

Tests shall be conducted using materials and methods specified on a "test" concrete and a "reference" concrete, together with a certification that no changes have been made in the formulation of the material since the performance of the tests. The report shall also include water contents and results of set time tests according to AASHTO T 197 that were conducted on both a test and reference concrete, using cement from the source that is used as a standard by the Bureau of Materials and Physical Research. The cement content for all required tests shall either be according to applicable specifications or 335 kg/cu m (5.65 cwt/cu yd). Compressive strength test results for six months and one year will not be required.

Prior to the approval of an admixture, the Engineer may conduct all or part of the applicable tests on a sample that is representative of the material to be furnished. The test and reference concrete mixtures tested by the Engineer will contain a cement content of 335 kg/cu m (5.65 cwt/cu yd).

The manufacturer shall submit certification, both initially and annually thereafter, giving the following information according to ASTM C 494; the average and manufacturing range of specific gravity, the average and manufacturing range of solids in the solution, and the average and manufacturing range of pH. The initial and annual certifications shall further state that all admixtures, except chloride-based accelerators, shall contain no more than 0.3 percent chloride by mass. The initial submittal shall also include an infrared spectrophotometer trace no more than five years old.

Annual re-submittals will be required and shall include certification that no changes have been made in the formulation since it was initially approved. The certification shall state that the admixture is the same as previously approved, and the Engineer may conduct such tests as deemed desirable to check the properties of the material before re-approval is granted.

When test results are more than seven years old, the manufacturer shall re-submit the infrared spectrophotometer trace and the report prepared by an independent laboratory that is accredited by AASHTO Accreditation Program.

1021.02 Air-Entraining Admixtures. Air-entraining admixtures shall conform to the requirements of AASHTO M 154.

If the manufacturer certifies that the air-entraining admixture is an aqueous solution of Vinsol resin that has been neutralized with sodium hydroxide (caustic soda), testing for compliance with the requirements may be waived by the Engineer. In the certification, the manufacturer shall show complete information with respect to the formulation of the solution, including the number of parts of Vinsol resin to each part of sodium hydroxide. Before the approval of its use is granted, the Engineer will test the solution for its air-entraining quality in comparison with a solution prepared and kept for that purpose.

1021.03 Retarding and Water-Reducing Admixtures. The admixture shall comply with the following requirements:

- (a) The retarding admixture shall comply with the requirements of AASHTO M 194, Type B (retarding) or Type D (water-reducing and retarding).
- (b) The water-reducing admixture shall comply with the requirements of AASHTO M 194, Type A.
- (c) The high range water-reducing admixture shall comply with the requirements of AASHTO M 194, Type F (high range water-reducing) or Type G (high range water-reducing and retarding).

When a Type F or Type G high range water-reducing admixture is used, water-cement ratios shall be a minimum of 0.32.

Type F or Type G admixtures may be used, subject to the following restrictions:

For Class MS, SI, RR, SC and SH concrete, the water-cement ratio shall be a maximum of 0.44.

The Type F or Type G admixture shall be added at the jobsite unless otherwise directed by the Engineer. The initial slump shall be a minimum of 40 mm (1 1/2 in.) prior to addition of the Type F or Type G admixture, except as approved by the Engineer.

When a Type F or Type G admixture is used, retempering with water or with a Type G admixture will not be allowed. An additional dosage of a Type F admixture, not to exceed 40 percent of the original dosage, may be used to retemper concrete once, provided set time is not unduly affected. A second retempering with a Type F admixture may be used for all classes of concrete except Class PP and SC, provided that the dosage does not exceed the dosage used for the first retempering, and provided that the set time is not unduly affected. No further retempering will be allowed.

Air tests shall be performed after the addition of the Type F or Type G admixture.

1021.04 Set Accelerating Admixtures. The admixture shall comply with the requirements of AASHTO M 194, Type C (accelerating) or Type E (water reducing and accelerating)"

Portland Cement Concrete

Effective: November 1, 2002

Add the following paragraph after the fourth paragraph of Article 1103.01(b) of the Standard Specifications:

"The truck mixer shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(c) of the Standard Specifications:

"The truck agitator shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(d) of the Standard Specifications:

"The nonagitator truck shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Revise the first sentence of the first paragraph of Article 1103.02 of the Standard Specifications to read:

"The plant shall be approved before production begins according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Curing and Protection of Concrete Construction

Effective: January 1, 2004

Revise the second and third sentences of the eleventh paragraph of Article 503.06 of the Standard Specifications to read:

"Forms on substructure units shall remain in place at least 24 hours. The method of form removal shall not result in damage to the concrete."

Delete the twentieth paragraph of Article 503.22 of the Standard Specifications.

Revise the "Unit Price Adjustments" table of Article 503.22 of the Standard Specifications to read:

"UNIT PRICE ADJUSTMENTS"	
Type of Construction	Percent Adjustment in Unit Price
For concrete in substructures, culverts (having a waterway opening of more than 1 sq m (10 sq ft)), pump houses, and retaining walls (except concrete pilings, footings and foundation seals):	
When protected by:	
Protection Method II	115%
Protection Method I	110%
For concrete in superstructures:	
When protected by:	
Protection Method II	123%
Protection Method I	115%
For concrete in footings:	
When protected by:	
Protection Method I, II or III	107%
For concrete in slope walls:	
When protected by:	
Protection Method I	107%"

Delete the fourth paragraph of Article 504.05(a) of the Standard Specifications.

Revise the second and third sentences of the fifth paragraph of Article 504.05(a) of the Standard Specifications to read:

"All test specimens shall be cured with the units according to Article 1020.13."

Revise the first paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"Curing and Low Air Temperature Protection. The curing and protection for precast, prestressed concrete members shall be according to Article 1020.13 and this Article."

Revise the first sentence of the second paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"For curing, air vents shall be in place, and shall be so arranged that no water can enter the void tubes during the curing of the members."

Revise the first sentence of the third paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"As soon as each member is finished, the concrete shall be covered with curing material according to Article 1020.13."

Revise the eighth paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"The prestressing force shall not be transferred to any member before the concrete has attained the compressive strength of 28,000 kPa (4000 psi) or other higher compressive release strength specified on the plans, as determined from tests of 150 mm (6 in.) by 300 mm (12 in.) cylinders cured with the member according to Article 1020.13. Members shall not be shipped until 28-day strengths have been attained and members have a yard age of at least 4 days."

Delete the third paragraph of Article 512.03(a) of the Standard Specifications.

Delete the last sentence of the second paragraph of Article 512.04(d) of the Standard Specifications.

Revise the "Index Table of Curing and Protection of Concrete Construction" table of Article 1020.13 of the Standard Specifications to read:

"INDEX TABLE OF CURING AND PROTECTION OF CONCRETE CONSTRUCTION"			
TYPE OF CONSTRUCTION	CURING METHODS	CURING PERIOD DAYS	LOW AIR TEMPERATURE PROTECTION METHODS
Cast-in-Place Concrete: ^{11/}			
Pavement			
Shoulder	1020.13(a)(1)(2)(3)(4)(5) ^{3/ 5/}	3	1020.13(c)
Base Course			
Base Course Widening	1020.13(a)(1)(2)(3)(4)(5) ^{1/ 2/}	3	1020.13(c)
Driveway			
Median			
Curb			
Gutter	1020.13(a)(1)(2)(3)(4)(5) ^{4/ 5/}	3	1020.13(c) ^{16/}
Curb and Gutter			
Sidewalk			
Slope Wall			
Paved Ditch			
Catch Basin			
Manhole	1020.13(a)(1)(2)(3)(4)(5) ^{4/}	3	1020.13(c)
Inlet			
Valve Vault			
Pavement Patching	1020.13(a)(1)(2)(3)(4)(5) ^{2/}	3 ^{12/}	1020.13(c)
Pavement Replacement	1020.13(a)(1)(2)(3)(4)(5) ^{1/ 2/}	3	442.06(h) and 1020.13(c)
Railroad Crossing	1020.13(a)(3)(5)	1	1020.13(c)
Piles	1020.13(a)(3)(5)	7	1020.13(e)(1)(2)(3)
Footings			
Foundation Seals	1020.13(a)(1)(2)(3)(4)(5) ^{4/ 6/}	7	1020.13(e)(1)(2)(3)
Substructure	1020.13(a)(1)(2)(3)(4)(5) ^{17/}	7	1020.13(e)(1)(2)(3)
Superstructure (except deck)	1020.13(a)(1)(2)(3)(5) ^{8/}	7	1020.13(e)(1)(2)
Deck	1020.13(a)(5)	7	1020.13(e)(1)(2) ^{17/}
Retaining Walls	1020.13(a)(1)(2)(3)(4)(5) ^{17/}	7	1020.13(e)(1)(2)
Pump Houses	1020.13(a)(1)(2)(3)(4)(5) ^{1/}	7	1020.13(e)(1)(2)
Culverts	1020.13(a)(1)(2)(3)(4)(5) ^{4/ 6/}	7	1020.13(e)(1)(2) ^{18/}
Other Incidental Concrete	1020.13(a)(1)(2)(3)(5)	3	1020.13(c)
Precast Concrete: ^{11/}			
Bridge Beams			
Piles			
Bridge Slabs	1020.13(a)(3)(5) ^{9/ 10/}	As required. ^{13/}	504.06(c)(6), 1020.13(e)(2) ^{19/}
Nelson Type Structural Member			
All Other Precast Items	1020.13(a)(3)(4)(5) ^{2/ 9/ 10/}	As required. ^{14/}	504.06(c)(6), 1020.13(e)(2) ^{19/}
Precast, Prestressed Concrete: ^{11/}			
All Items	1020.13(a)(3)(5) ^{9/ 10/}	Until strand tensioning is released. ^{15/}	504.06(c)(6), 1020.13(e)(2) ^{19/}

Notes-General:

- 1/ Type I, membrane curing only
- 2/ Type II, membrane curing only
- 3/ Type III, membrane curing only
- 4/ Type I, II and III membrane curing
- 5/ Membrane curing will not be permitted between November 1 and April 15.
- 6/ The use of water to inundate footings, foundation seals or the bottom slab of culverts is permissible when approved by the Engineer, provided the water temperature can be maintained at 7 °C (45 °F) or higher.
- 7/ Asphalt Emulsion for Waterproofing may be used in lieu of other curing methods when specified and permitted according to Article 503.18.
- 8/ On non-traffic surfaces which receive protective coat according to Article 503.19, a linseed oil emulsion curing compound may be used as a substitute for protective coat and other curing methods. The linseed emulsion curing compound will be permitted between April 16 and October 31 of the same year, provided it is applied with a mechanical sprayer according to Article 1101.09 (b), and meets the material requirements of Article 1022.07.
- 9/ Steam curing (heat and moisture) is acceptable and shall be accomplished by the method specified in Article 504.06(c)(6).
- 10/ A moist room according to AASHTO M 201 is acceptable for curing.
- 11/ If curing is required and interrupted because of form removal for cast-in-place concrete items, precast concrete products, or precast prestressed concrete products, the curing shall be resumed within two hours from the start of the form removal.
- 12/ Curing maintained only until opening strength is attained, with a maximum curing period of three days.
- 13/ The curing period shall end when the concrete has attained the mix design strength. The producer has the option to discontinue curing when the concrete has attained 80 percent of the mix design strength or after seven days. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 14/ The producer shall determine the curing period or may elect to not cure the product. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 15/ The producer has the option to continue curing after strand release.
- 16/ When structural steel or structural concrete is in place above slope wall, Article 1020.13(c) shall not apply. The protection method shall be according to Article 1020.13(e)(1).
- 17/ When Article 1020.13(e)(2) is used to protect the deck, the housing may enclose only the bottom and sides. The top surface shall be protected according to Article 1020.13(e)(1).
- 18/ For culverts having a waterway opening of 1 sq m (10 sq ft) or less, the culverts may be protected according to Article 1020.13(e)(3).
- 19/ The seven day protection period in the first paragraph of Article 1020.13(e)(2) shall not apply. The protection period shall end when curing is finished. For the third paragraph of Article 1020.13(e)(2), the decrease in temperature shall be according to Article 504.06(c)(6)."

Add the following to Article 1020.13(a) of the Standard Specifications:

- "(5) Wetted Cotton Mat Method. After the surface of concrete has been textured or finished, it shall be covered immediately with dry cotton mats. The cotton mats shall be placed in a manner which will not mar the concrete surface. A texture resulting from the cotton mat material is acceptable. The cotton mats shall then be wetted immediately and thoroughly

soaked with a gentle spray of water. For bridge decks, a foot bridge shall be used to place and wet the cotton mats.

The cotton mats shall be maintained in a wetted condition until the concrete has hardened sufficiently to place soaker hoses without marring the concrete surface. The soaker hoses shall be placed on top of the cotton mats at a maximum 1.2 m (4 ft) spacing. The cotton mats shall be kept wet with a continuous supply of water for the remainder of the curing period. Other continuous wetting systems may be used if approved by the Engineer.

After placement of the soaker hoses, the cotton mats shall be covered with white polyethylene sheeting or burlap-polyethylene blankets.

For construction items other than bridge decks, soaker hoses or a continuous wetting system will not be required if the alternative method keeps the cotton mats wet. Periodic wetting of the cotton mats is acceptable.

For areas inaccessible to the cotton mats on bridge decks, curing shall be according to Article 1020.13(a)(3)."

Revise the first paragraph of Article 1020.13(c) of the Standard Specifications to read:

"Protection of Portland Cement Concrete, Other Than Structures, From Low Air Temperatures. When the official National Weather Service forecast for the construction area predicts a low of 0 °C (32 °F), or lower, or if the actual temperature drops to 0 °C (32 °F), or lower, concrete less than 72 hours old shall be provided at least the following protection:"

Delete Article 1020.13(d) and Articles 1020.13(d)(1),(2),(3),(4) of the Standard Specifications.

Revise the first five paragraphs of Article 1020.13(e) of the Standard Specifications to read:

"Protection of Portland Cement Concrete Structures From Low Air Temperatures. When the official National Weather Service Forecast for the construction area predicts a low below 7 °C (45 °F), or if the actual temperature drops below 7 °C (45 °F), concrete less than 72 hours old shall be provided protection. Concrete shall also be provided protection when placed during the winter period of December 1 through March 15. Concrete shall not be placed until the materials, facilities and equipment for protection are approved by the Engineer.

When directed by the Engineer, the Contractor may be required to place concrete during the winter period. If winter construction is specified, the Contractor shall proceed with the construction, including concrete, excavation, pile driving, steel erection and all appurtenant work required for the complete construction of the item, except at times when weather conditions make such operations impracticable.

Regardless of the precautions taken, the Contractor shall be responsible for protection of the concrete placed and any concrete damaged by cold temperatures shall be removed and replaced by the Contractor at his/her own expense."

Add the following at the end of the third paragraph of Article 1020.13(e)(1) of the Standard Specifications:

"The Contractor shall provide means for checking the temperature of the surface of the concrete during the protection period."

Revise the second sentence of the first paragraph of Article 1020.13(e)(2) of the Standard Specifications to read:

"The Contractor shall provide means for checking the temperature of the surface of the concrete or air temperature within the housing during the protection period."

Delete the last sentence of the first paragraph of Article 1020.13(e)(3) of the Standard Specifications.

Add the following Article to Section 1022 of the Standard Specifications:

"1022.06 Cotton Mats. Cotton mats shall consist of a cotton fill material, minimum 400 g/sq m (11.8 oz/sq yd), covered with unsized cloth or burlap, minimum 200 g/sq m (5.9 oz/sq yd), and be tufted or stitched to maintain stability.

Cotton mats shall be in a condition satisfactory to the Engineer. Any tears or holes in the mats shall be repaired.

Add the following Article to Section 1022 of the Standard Specifications:

"1022.07 Linseed Oil Emulsion Curing Compound. Linseed oil emulsion curing compound shall be composed of a blend of boiled linseed oil and high viscosity, heavy bodied linseed oil emulsified in a water solution. The curing compound shall meet the requirements of a Type I, II, or III according to Article 1022.01, except the drying time requirement will be waived. The oil phase shall be 50 ± 4 percent by volume. The oil phase shall consist of 80 percent by mass (weight) boiled linseed oil and 20 percent by mass (weight) Z-8 viscosity linseed oil. The water phase shall be 50 ± 4 percent by volume."

Revise Article 1020.14 of the Standard Specifications to read:

"1020.14 Temperature Control for Placement. Temperature control for concrete placement shall conform to the following requirements:

- (a) Temperature Control other than Structures. The temperature of concrete immediately before placing, shall be not less than 10 °C (50 °F) nor more than 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

Plastic concrete temperatures up to 35 °C (96 °F), as placed, may be permitted provided job site conditions permit placement and finishing without excessive use of water on and/or overworking of the surface. The occurrence within 24 hours of unusual surface distress shall be cause to revert to a maximum 32 °C (90 °F) plastic concrete temperature.

Concrete shall not be placed when the air temperature is below 5 °C (40 °F) and falling or below 2 °C (35 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to not less than 20 °C (70 °F) nor more than 65 °C (150 °F). The aggregates may be heated by either

steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

For pavement patching, refer to Article 442.06(e) for additional information on temperature control for placement.

- (b) Temperature Control for Structures. The temperature of concrete as placed in the forms shall be not less than 10 °C (50 °F) nor more than 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits. When insulated forms are used, the temperature of the concrete mixture shall not exceed 25 °C (80 °F). If the Engineer determines that heat of hydration might cause excessive temperatures in the concrete, the concrete shall be placed at a temperature between 10 °C (50 °F) and 15 °C (60 °F), per the Engineer's instructions. When concrete is placed in contact with previously placed concrete, the temperature of the concrete may be increased as required to offset anticipated heat loss.

Concrete shall not be placed when the air temperature is below 7 °C (45 °F) and falling or below 4 °C (40 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to not less than 20 °C (70 °F) nor more than 65 °C (150 °F). The aggregates may be heated by either steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

- (c) Temperature. The concrete temperature shall be determined according to ASTM C 1064."

Personal Protective Equipment

Effective: July 1, 2004

All personnel, excluding flaggers, working outside of a vehicle (car or truck) within 7.6 m (25 ft) of pavement open to traffic shall wear a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments. Other types of garments may be substituted for the vest as long as the garments have manufacturers tags identifying them as meeting the ANSI Class 2 requirement.

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

	Page
I. General	1
II. Nondiscrimination	1
III. Nonsegregated Facilities	3
IV. Payment of Predetermined Minimum Wage.....	3
V. Statements and Payrolls	6
VI. Record of Materials, Supplies, and Labor.....	7
VIII. Safety: Accident Prevention	7
IX. False Statements Concerning Highway Projects.....	7
X. Implementation of Clean Air Act and Federal Water Pollution Control Act	8
XI. Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion	8
XII. Certification Regarding Use of Contract Funds for Lobbying	9

ATTACHMENTS

- A. Employment Preference for Appalachian Contracts
(included in Appalachian contracts only)

I. GENERAL

1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.

3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.

4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

- Section I, paragraph 2;
- Section IV, paragraphs 1, 2, 3, 4 and 7;
- Section V, paragraphs 1 and 2a through 2g.

5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6 and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6. Selection of Labor: During the performance of this contract, the contractor shall not:

- a. Discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or
- b. Employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

II. NONDISCRIMINATION

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60 (and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.

b. The contractor will accept as his operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job-training."

2. EEO Officer: The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for an must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above

agreement will be met, the following actions will be taken as a minimum:

- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
 - b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
 - c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.
 - d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
 - e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.
4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.
- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employees referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish which such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.
 - b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)
 - c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.
5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
 - b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any

evidence of discriminatory wage practices.

- c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
 - d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.
6. Training and Promotion:
- a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.
 - b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.
 - c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
 - d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.
7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:
- a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.
 - b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
 - c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to

the SHA and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or quailifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.

8. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.

c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and

(4) The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.

b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of \$10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1. General:

a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the

contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.

b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.

c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. Classification:

a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.

b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

(1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;

(2) the additional classification is utilized in the area by the construction industry;

(3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and

(4) with respect to helpers, when such a classification prevails in the area in which the work is performed.

c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or

disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the question, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. Payment of Fringe Benefits:

a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any cost reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:

a. Apprentices:

(1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.

(2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not

be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

(4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

(1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.

(2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits

Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which cases such trainees shall receive the same fringe benefits as apprentices.

(4) In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV. 2. Any worker listed on a payroll at a helper wage rate, who is not a helper under a approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. Apprentices and Trainees (Programs of the U.S. DOT):

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. Withholding:

The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainee's and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. Overtime Requirements:

No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. Violation:

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of \$10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. Withholding for Unpaid Wages and Liquidated Damages:

The SHA shall; upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. Compliance with Copeland Regulations (29 CFR 3):

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. Payrolls and Payroll Records:

a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.

b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan

or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.

c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period).

The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V.

This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the Contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;

(2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;

(3) that each laborer or mechanic has been paid not less than the applicable wage rate and fringe benefits or cash equivalent for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.

f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S. C. 1001 and 31 U.S.C. 231.

g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for

inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

1. On all federal-aid contracts on the national highway system, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than \$1,000,000 (23 CFR 635) the contractor shall:

- a. Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.
- b. Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.
- c. Furnish, upon the completion of the contract, to the SHA resident engineer on /Form FHWA-47 together with the data required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.

2. At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

VII. SUBLETTING OR ASSIGNING THE CONTRACT

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

- a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.
- b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a

whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract.

Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY: ACCIDENT PREVENTION

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification,

distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more than \$10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$100,000 or more).

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.

2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.

3. That the firm shall promptly notify the SHA of the receipt of

any communication from the Director, Office of Federal Activities, EPA indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. Instructions for Certification - Primary Covered Transactions:

(Applicable to all Federal-aid contracts - 49 CFR 29)

a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.

d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.

f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled

"Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded from Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Primary Covered Transactions

1. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
- b. Have not within a 3-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and
- d. Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

2. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Covered Transactions:

(Applicable to all subcontracts, purchase orders and other lower tier transactions of \$25,000 or more - 49 CFR 29)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealing.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

Certification Regarding Debarment, Suspension, Ineligibility And Voluntary Exclusion-Lower Tier Covered Transactions:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

MINIMUM WAGES FOR FEDERAL AND FEDERALLY ASSISTED CONSTRUCTION CONTRACTS

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision

NOTICE

The most current **General Wage Determination Decisions** (wage rates) are available on the IDOT web site. They are located on the Letting and Bidding page at <http://www.dot.il.gov/desenv/delett.html>.

In addition, ten (10) days prior to the letting, the applicable Federal wage rates will be e-mailed to subscribers. It is recommended that all contractors subscribe to the Federal Wage Rates List or the Contractor's Packet through IDOT's subscription service.

PLEASE NOTE: if you have already subscribed to the Contractor's Packet you will automatically receive the Federal Wage Rates.

The instructions for subscribing are at <http://www.dot.il.gov/desenv/subsc.html>.

If you have any questions concerning the wage rates, please contact IDOT's Chief Contract Official at 217-782-7806.